
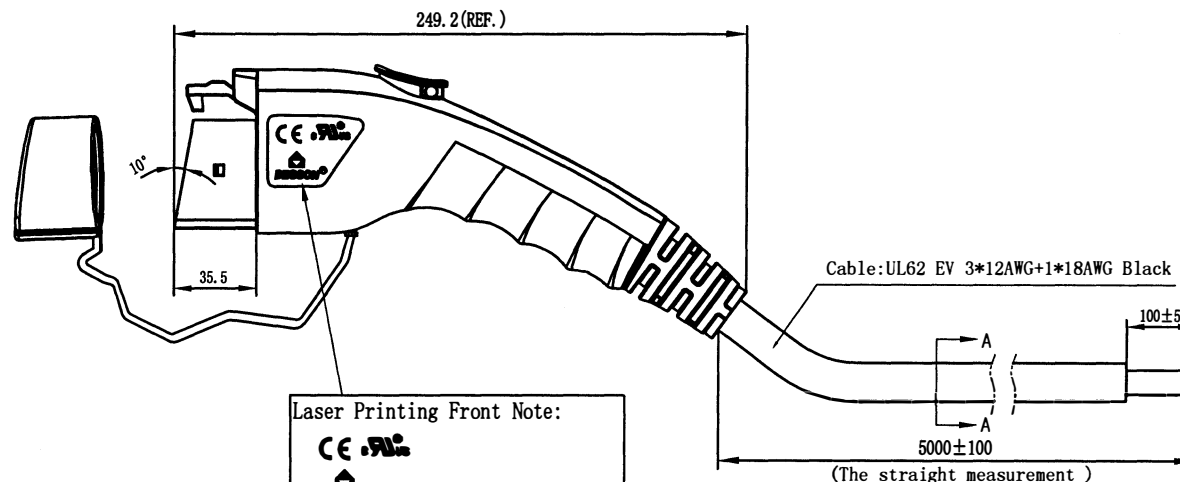



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
00-2		Drawings to upgrade	LLL	2020.09.07

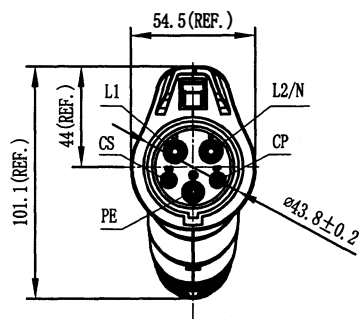

Wiring diagram

L1 12AWG Brown
N 12AWG Blue
PE 12AWG Yellow/Green
CS
CP 18AWG Red




Laser Printing Front Note:



Laser Printing Back Note(Arial) :

MAAC-S-016A-V-03-5.0M-10AH
16A 240V AC
SAE J1772:2017
Type 3S
20xxxxxx-xxxx

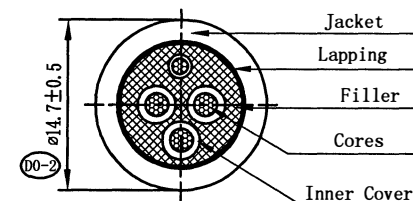

SEC A-A

NOTES:

1. Cable: UL62 EV 3*12AWG+1*18AWG Black
2. RoHS Compliance

Technical parameters

Rated voltage	240V AC
Rated current	16A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE 2500V AC 1Min L AND N 2500V AC 1Min
Ingress protection	Type 3S
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<75N
Reference standard	SAEJ1772:2017

00-2

00-2

00-2

Customer Drawing


Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

PART NO.:/

APPD: 2X 20200907

CHKD: DT 2020.9.7

DRFT: XF LUO 2019-05-29



THIRD ANGLE PROJECTION



宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

NAME: Vehicle Connector (16A AC single phase)
MAAC-S-016A-V-03-5.0M-10A (H)

TITLE: Customer Drawing

DRAWING NO. : /

DO NOT SCALE DRAWING

REV

SHEET

SCALE

D0-2

1/1

1:3