



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
00-2		Drawings to upgrade	LLL	2020.09.07




Wiring diagram

L1 8AWG Brown
N 8AWG Blue
PE 8AWG Yellow/Green
CS
CP 18AWG Red



R6=150 Ω $\pm$ 3%
R7=330 Ω $\pm$ 3%

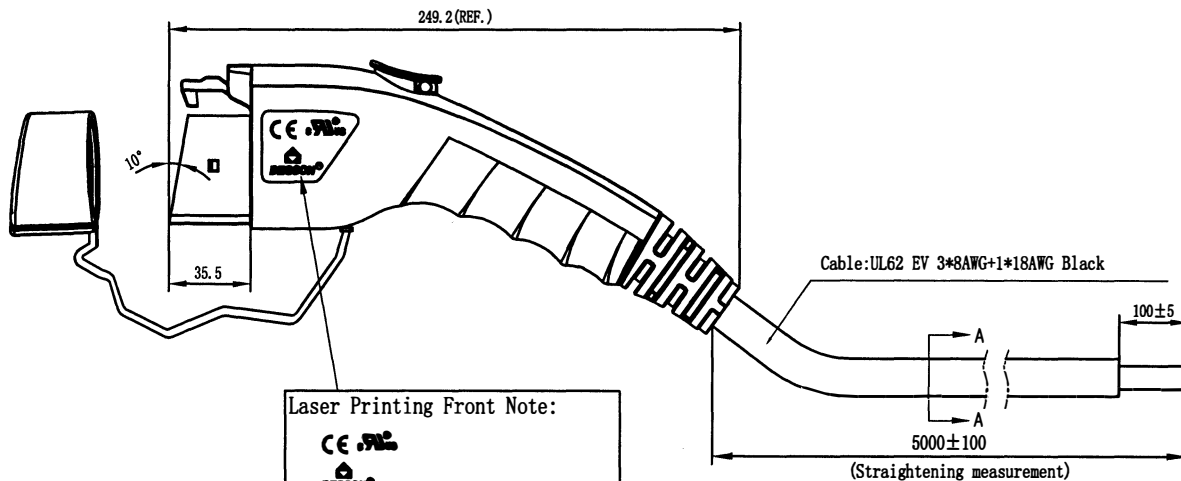


Laser Printing Front Note:



Laser Printing Back Note(Arial):

MAAC-S-040A-V-03-5. 0M-10AH
40A 240V AC
SAE J1772:2017
Type 3S
20xxxxxx-xxxx

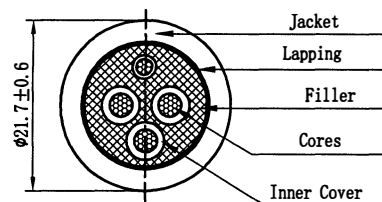

SEC A-A

NOTES:

1. Cable: UL62 EV 3*12AWG+1*18AWG Black
2. RoHS Compliance

Technical parameters

Rated voltage	240V AC
Rated current	40A
Temperature range	-30°C~+50°C
Insulate resistance	>5M Ω , 500V DC 1Min
Withstanding voltage	L, N and PE, 2500V AC 1Min L and N, 2500V AC 1Min
Ingress protection	Type 3S
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<75N
Reference standard	SAEJ1772:2017

00-2

00-2

00-2

Customer Drawing

Size Measure Range	. XX	. X
≤ 6	± 0.05	± 0.10
6~30	± 0.10	± 0.20
30~120	± 0.15	± 0.30
120~400	± 0.20	± 0.50
400~1000	± 0.30	± 0.80
1000~2000	± 0.50	± 1.20
Angle Measure Range	. XX	. X
	$\pm 0.5^\circ$	$\pm 1.0^\circ$


DETACHED LISTS

PART NO.:/

APPD: ZX 20200907

CHKD: DT 2020.9.7

DRFT: XP LUO 2019-06-13



THIRD ANGLE PROJECTION



宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

NAME: Vehicle Connector (40A AC single phase)
MAAC-S-040A-V-03-5. 0M-10A (H)

TITLE: Customer Drawing

DRAWING NO.:/

(INCH)

DO NOT SCALE DRAWING

REV D0-2

SHEET 1/1

SCALE 1:3