


REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

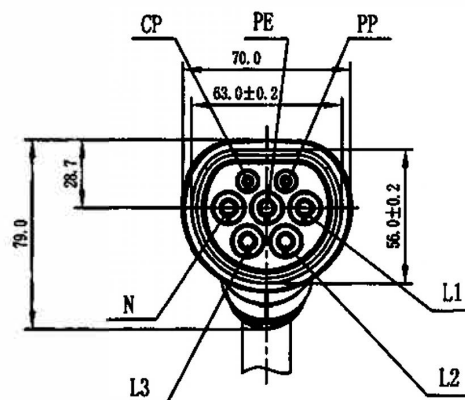

Wiring diagram

L1 6mm² Brown
 Spare L2
 Spare L3
 N 6mm² Blue
 PE 6mm² Yellow/Green
 PP
 CP 0.75mm² Red

RC=220Ω±3%

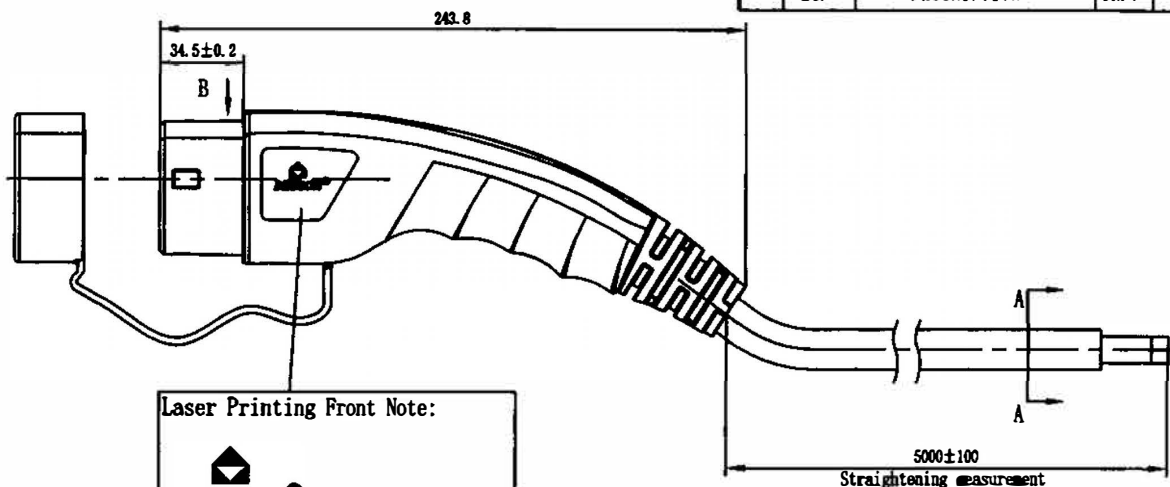


Laser Printing Front Note:



Laser Printing Back Note(Arial):

MEAC-S-032A-V1-03-5.0M-30AH
 32A 250V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx

SEC A-A

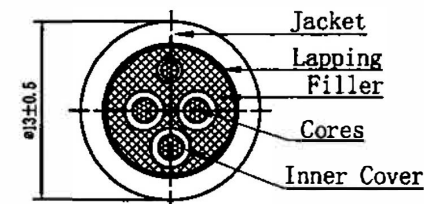

Technical parameters

Rated voltage	250V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

NOTES:

1. Cable: EN50620-2017/IEC62893.3 EV 3*6mm²+1*0.75mm² Black
2. RoHS Compliance


Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

PART NO. : /

APPD: ZX 20200413

CHKD: DT 2020.4.13

DRFT: XF LUD 2019-09-26



THIRD ANGLE PROJECTION



宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: Vehicle Connector (32A AC single phase)
 MEAC-S-032A-V1-03-5.0M-30A(H)

TITLE: Customer Drawing

DRAWING NO. : /

(1:1)

DO NOT SCALE DRAWING

REV D0-1

SHEET 1/1

SCALE 1:3