

H

G

F

E

D

C

B

A

H

G

F


E

D


C

B



A

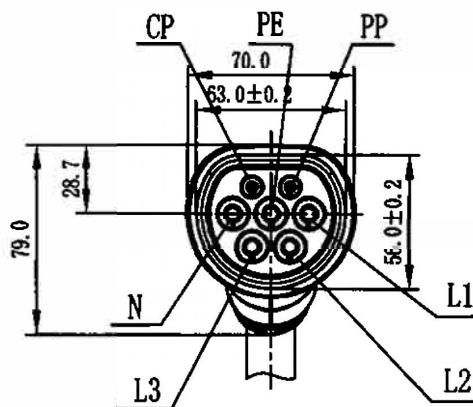

Wiring diagram



RC=220Ω±3%

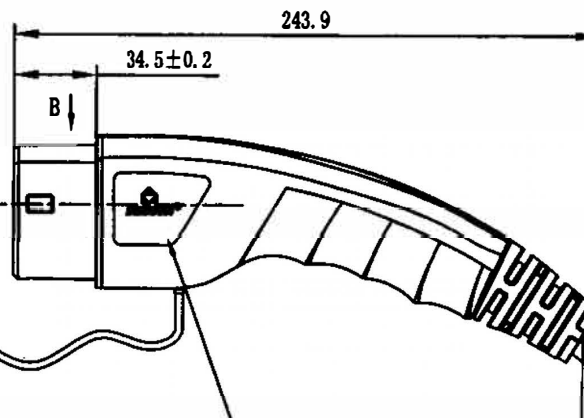



Laser Printing Front Note:



Laser Printing Back Note(Arial) :

MEAC-T-032A-V1-03-5.0M-30AH
 32A 440V AC
 IEC 62196-2:2016
 IP54
 20x00000x-0000

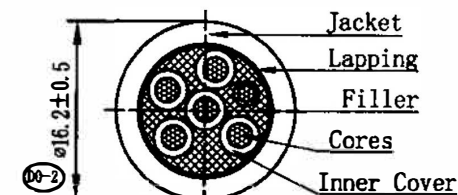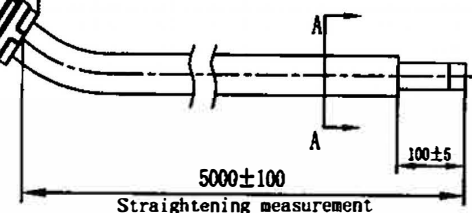

SEC A-A

NOTES:

1. Cable: EN50620-2017/IEC62893.3 5*6mm²+1*0.75mm² Black
2. RoHS Compliance

Technical parameters


Rated voltage	440V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

DETACHED LISTS

PART NO. : 22020000096	APPD: ZX 20200417	NAME: NINGBO DEGSON ELECTRICAL CO., LTD
CHND: DT 2020.4.17	DRFT: XF LUO 2019-08-06	TITLE: Customer Drawing
		VEHICLE CONNECTOR (32A AC three phase) MEAC-T-032A-V1-03-5.0M-30AH
		DRAWING NO.: 22000151
		DO NOT SCALE DRAWING
		SCALE: 1:3



THIRD ANGLE PROJECTION