

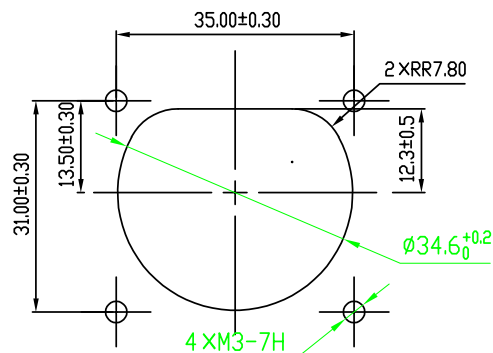
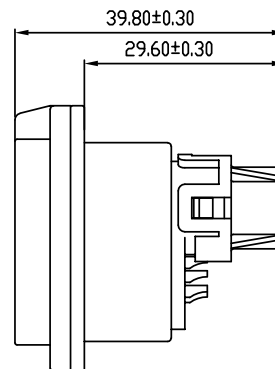


未注公差/General tolerances(mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

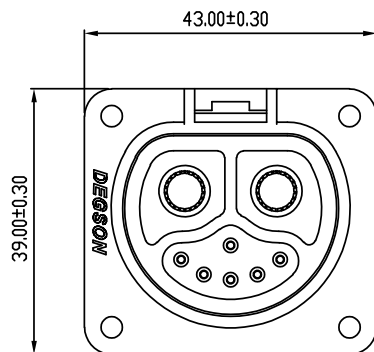

型号说明

SA-EBBH-2006-F-00A(H)

插座
组装式
系列名称
母端
通用型环保产品
产品插针数量
功率针2pin,
信号针6pin

额定电压/Rated Voltage/Current	72VDC/100A
绝缘电阻/Insulation resistance	≥500MΩ
插拔次数/Mechanical working life(mating cycles)	3000
耐电压/Withstanding voltage	1500V AC
使用温度范围/Operating temperature(°C)	-40~+105
防水等级/Levels of protection	
接线方式/Terminal	Crimping
导线规格范围/Wire range(mm)	Power:4~6AWG

MATERIAL: /	SURFACE: /
MAT NO.: /	STATUS: /
APPD: /	NAME: SA-EBBH-2006-F-00A(H)
CHKD: /	DRAWING NO.: /
DRFT: Eric 2021.10.13	REV: /
SIZE: A4	SCALE: 2:1
TYPE: CUSTOMER DRAWING	SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
AO				
TO				

