

TZ Type


2.0 x 1.6 mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator

FEATURE


- Typical 2.0 x 1.6 x 0.7 mm ceramic SMD package.
- For automatic assembly.
- Compactness and lightweight.
- VCTCXO available.
- Miniature size and low profile.

TYPICAL APPLICATION

- GPS
- WiMAX, WLAN
- Mobile Phone
- IoT, wearable Electronics.




OPTION A
RoHS Compliant




OPTION B
RoHS Compliant

OPTION A

DIMENSION (mm)

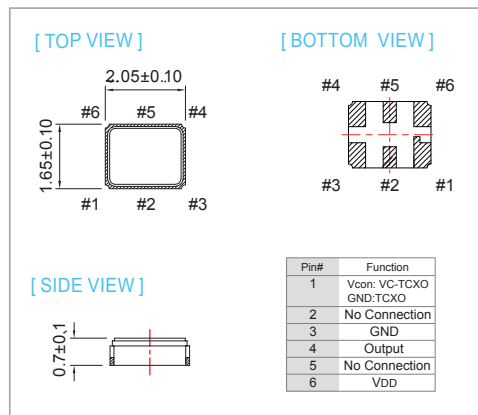


SOLDER PAD LAYOUT (mm)

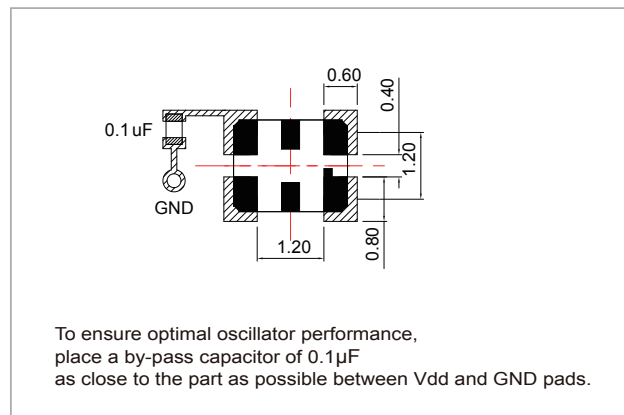


OPTION B

DIMENSION (mm)

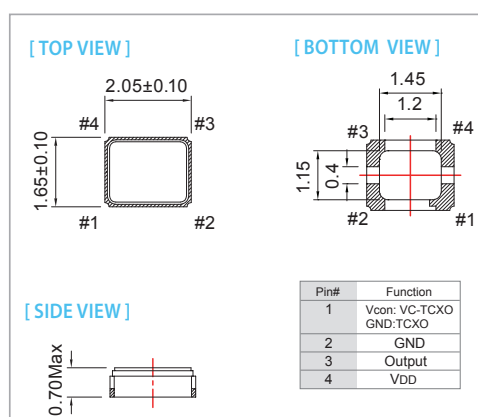

SOLDER PAD LAYOUT (mm)

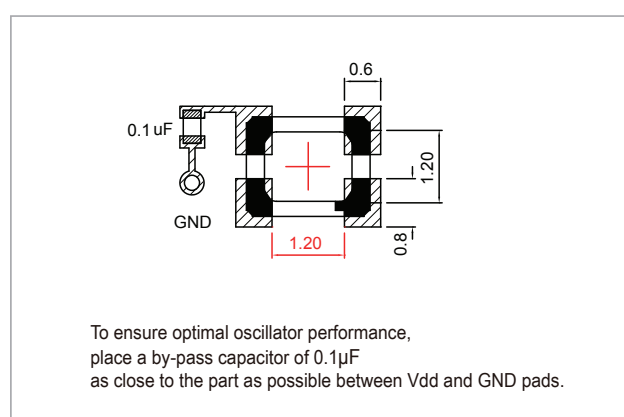

Note: not all combination of options are available. Other specifications may be available upon request.



ELECTRICAL SPECIFICATION

Parameter	3.3 / 3.0 / 2.8 V		2.5 V		1.8 V		Unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	2.66	3.465	2.375	2.625	1.71	1.89	V
Frequency Range	10	52	10	52	10	52	MHz
Standard Frequency	16.369, 19.2, 26.0, 38.4						
Frequency Tolerance*	—	±2.0	—	±2.0	—	±2.0	ppm
Frequency stability							ppm
Vs Supply Voltage (±5%) change	—	±0.2	—	±0.2	—	±0.2	
Vs Load (±10%) change	—	±0.2	—	±0.2	—	±0.2	
Vs Aging (@ 1st year)	—	±1.0	—	±1.0	—	±1.0	
Supply Current 10 MHz ≤ Fo ≤ 26 MHz	—	1.5	—	1.5	—	1.5	mA
26 MHz < Fo ≤ 52 MHz	—	2.0	—	2.0	—	2.0	
Output Level (Clipped sine wave)	0.8	—	0.8	—	0.8	—	Vp-p
Load	10 KΩ // 10pF		10 KΩ // 10pF		10 KΩ // 10pF		
Control Voltage Range (VCTCXO)	0.5	2.5	0.4	2.4	0.3	1.5	V
Pulling Range (VCTCXO)	±5.0	—	±5.0	—	±5.0	—	ppm
Vc Input Impedance (VCTCXO)	500	—	500	—	500	—	kΩ
Phase Noise @ 19.2 MHz 100 Hz	-115		-115		-115		dBc/Hz
1 kHz	-135		-135		-135		
10 kHz	-148		-148		-148		
Start time	—	2	—	2	—	2	mSec
Storage Temp. Range	-55	125	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

* Frequency at 25°C, 1 hour after reflow.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C) \ ppm	±0.5	±1.0	±1.5	±2.0	±2.5
-20 ~ +70	○	○	○	○	○
-30 ~ +85	○	○	○	○	○
-40 ~ +85	○	○	○	○	○

* ○ : Available △ : Conditional X : Not available

Note: not all combination of options are available. Other specifications may be available upon request.

