

7" 2000 NITS ULTRA-BRIGHT

TOUCH CAMERA CONTROL MONITOR



2000 Nits



1920×1200



Touch Screen



Dual Batteries



Camera Control



3G-SDI / HDMI2.0



HT7S





2000 NITS

AUTO DIMMING

7" 1920×1200 physical resolution, with 2000 nits ultra high brightness
for outdoor sunlight readable.

COLOR CALIBRATION

Color calibration supports the PRO/LTE version of ColourSpace CMS provided by Light Illusion.

HDR

Making lighter and darker details to be displayed more clearly. Support ST2084 300 / ST2084 1000 /

3D LUT

Built-in 3D-LUT, featuring 17 default logs and 6 user logs.

*Default color calibration to 100% BT



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



TOUCH CONTROL

EASY TO USE

Easy and convenient touch commands to quickly wake up the menu on screen, then adjust camera assist functions, display and settings.



CONTROL CAMERA

BY LANC CABLE

The LANC cable enables the monitor to be interfaced with the Sony video camera for the purpose of controlling some camera's functions.

HOW TO CONTROL?



ACTIONS FEEDBACK

Users can control camera's functions and menus directly on the monitor.

UI FOR CAMERA CONTROL

Tap the "camera" icon on the right of menu to access the UI of camera control.



LANC

HOW TO CONTROL?

FOCUS	ZOOM	IRIS	
Controlling the focus of video camera.	Controlling the zoom in and out of video camera lens.	Controlling the aperture size of video camera.	Controlling the record function of video camera on and off.

*Note: Some cameras do not support all control functions.




ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

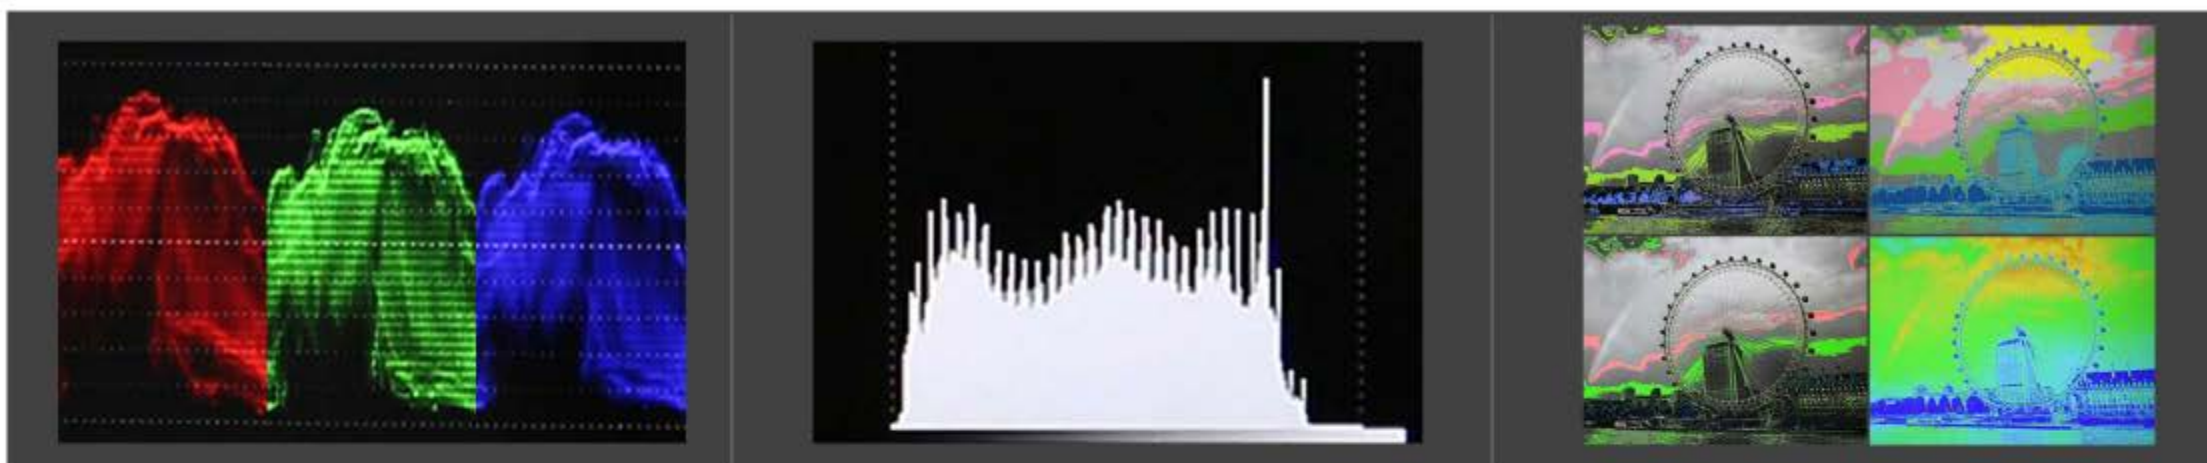

WAVEFORM

HISTOGRAM

FALSE COLOR



ANAMORPHIC DE-SQUEEZE

PEAKING FOCUS

EXPOSURE

CAMERA ASSIST FUNCTIONS





3G-SDI

UP TO 1080P 60HZ

Equipped with 3G-SDI input and loop output interfaces, which support up to 1080p 60Hz video signal.



HDMI 2.0

UP TO 2160P 60HZ

Equipped with HDMI 2.0 input and loop output interfaces, which support up to 2160p 60Hz video signal.



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



WIRELESS VIDEO

TRANSMISSION

Any device with an NP-F series battery plate can be mounted.



NP-F Battery Plate Adapter

This adapter allows for easy docking of external devices and powering external devices through the monitor.



Power to External Device

When external device and battery are installed at the same time, the battery can power not only monitor but also the external device.



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



ACCESSORIES

STANDARD



0.8M HDMI A-D Cable



LANC Cable



Hot Shoe Mount



USB Drive Disk

OPTIONAL



12V 2A DC Power Adapter



Battery Plate Adapter



Wireless Video Transmission



Handbag