

LILLIPUT®

1920×1200 Resolution, 1500 nits brightness, 12G-SDI and HDMI 2.0

10.1" HDMI2.0 / 2×12G-SDI

ULTRA HIGH BRIGHTNESS ON-CAMERA MONITOR



Q10

1500 NITS


ULTRA HIGH BRIGHTNESS

3D-LUT

It can quickly recombine color tone to form different color styles. Built-in 3D-LUT, featuring 17 default logs and 6 user logs.

HDR

Allowing lighter and darker details to be displayed more clearly. Support ST2084 300 / 1000 / 10000 / HLG.

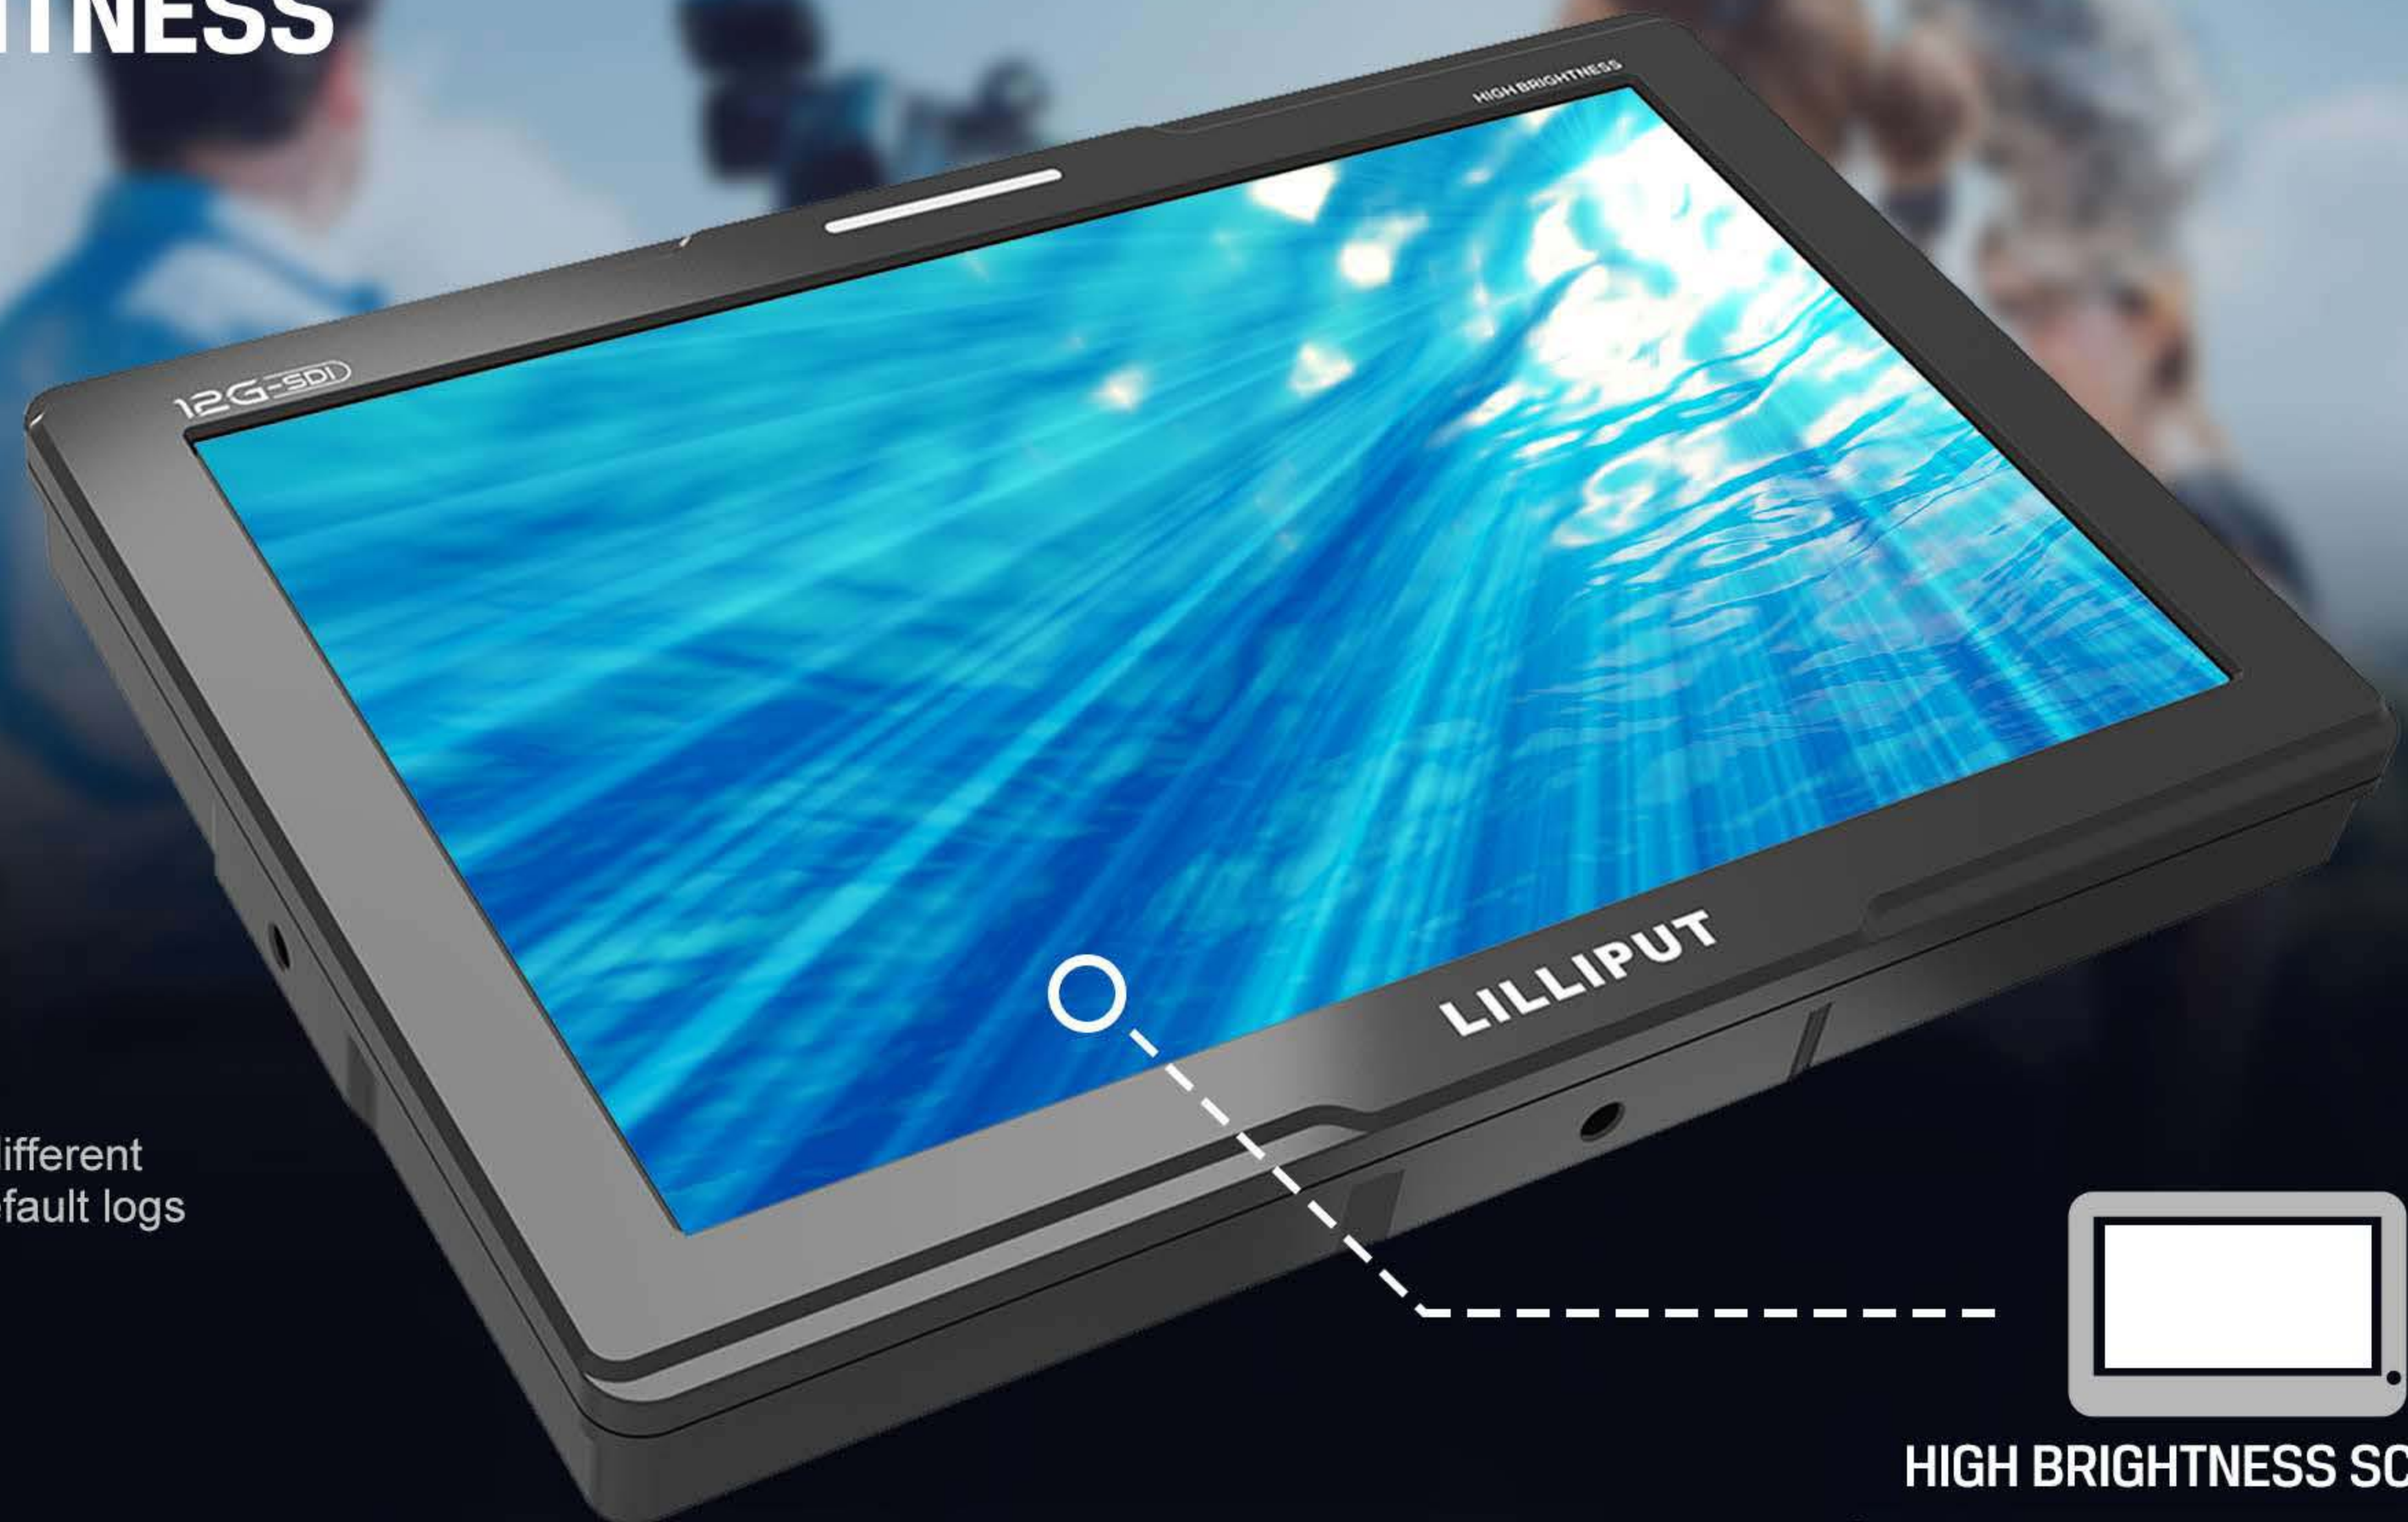

HIGH BRIGHTNESS SCREEN

Featuring an amazing 1500 nits LCD screen, with the sun readability therefore the gear suitable for any innovative outdoor framing. Mounted on top of the camera, to make it the "Brightest Scenery".



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



12G-SDI BROADCAST

It is possible to receive 2× 12G-SDI signals and display through PIP / PBP function, it can be of assistance when having multiple video signals.



Equipped with 12G-SDI input/output interfaces, it can support up to 4096×2160 60p & 3840×2160 60p signal.

HDMI 2.0 VIDEO SHOOTING

Supports HDMI signals up to 4K 60Hz which is compatible with the latest DSLR cameras on the market with an HDMI 2.0 interface.



Equipped with HDMI 2.0 input/output interfaces, it can support up to 4096×2160 60p & 3840×2160 60p signal.



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



12G-SDI MULTIVIEW

PIP / PBP


The monitor is equipped with two 12G-SDI input video signal interfaces, so it is logical that two video signals can be monitored at the same time. Users can choose to use PIP or PBP depending on their needs.




Multiview mode/PIP



Multiview mode/PBP

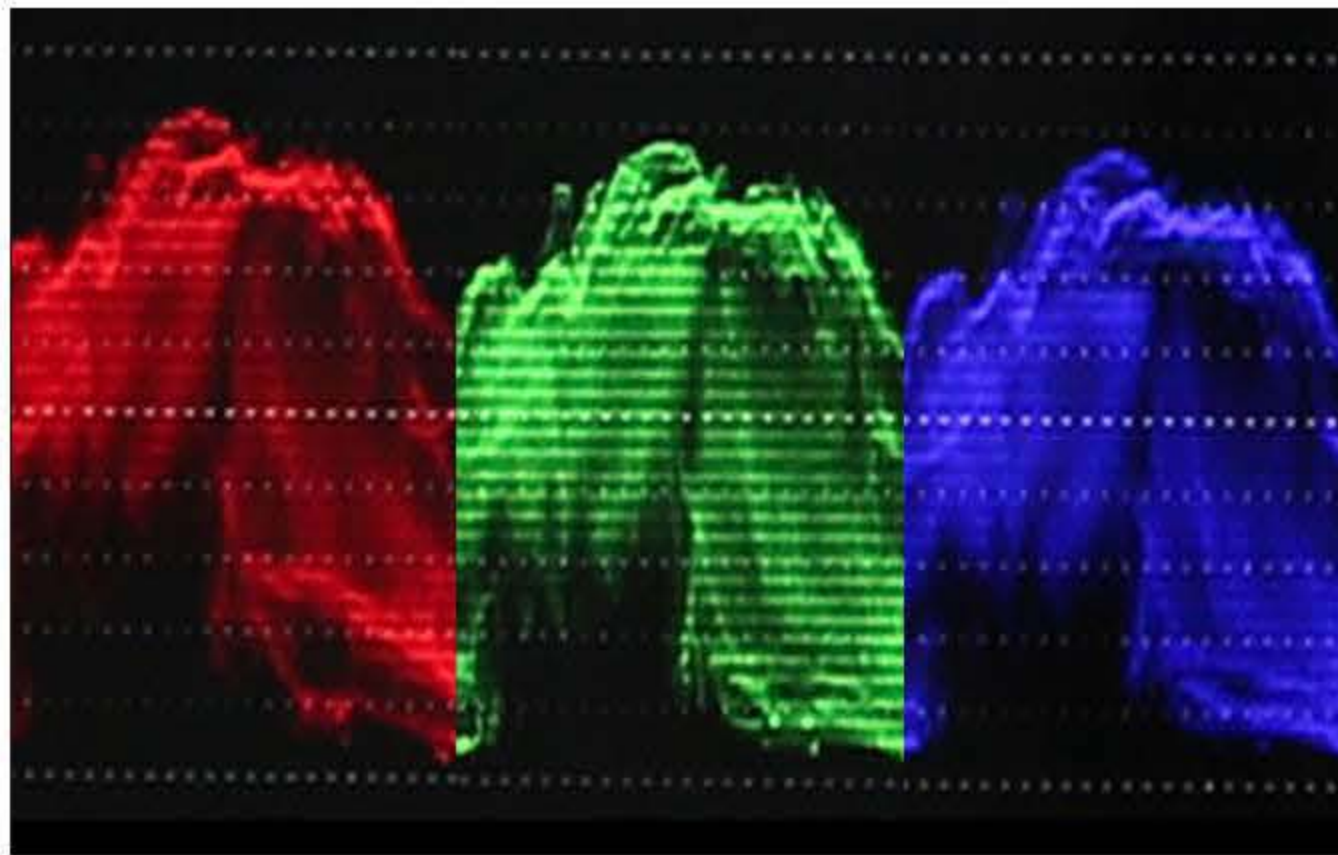


WAVEFORM
(FULL SCREEN)

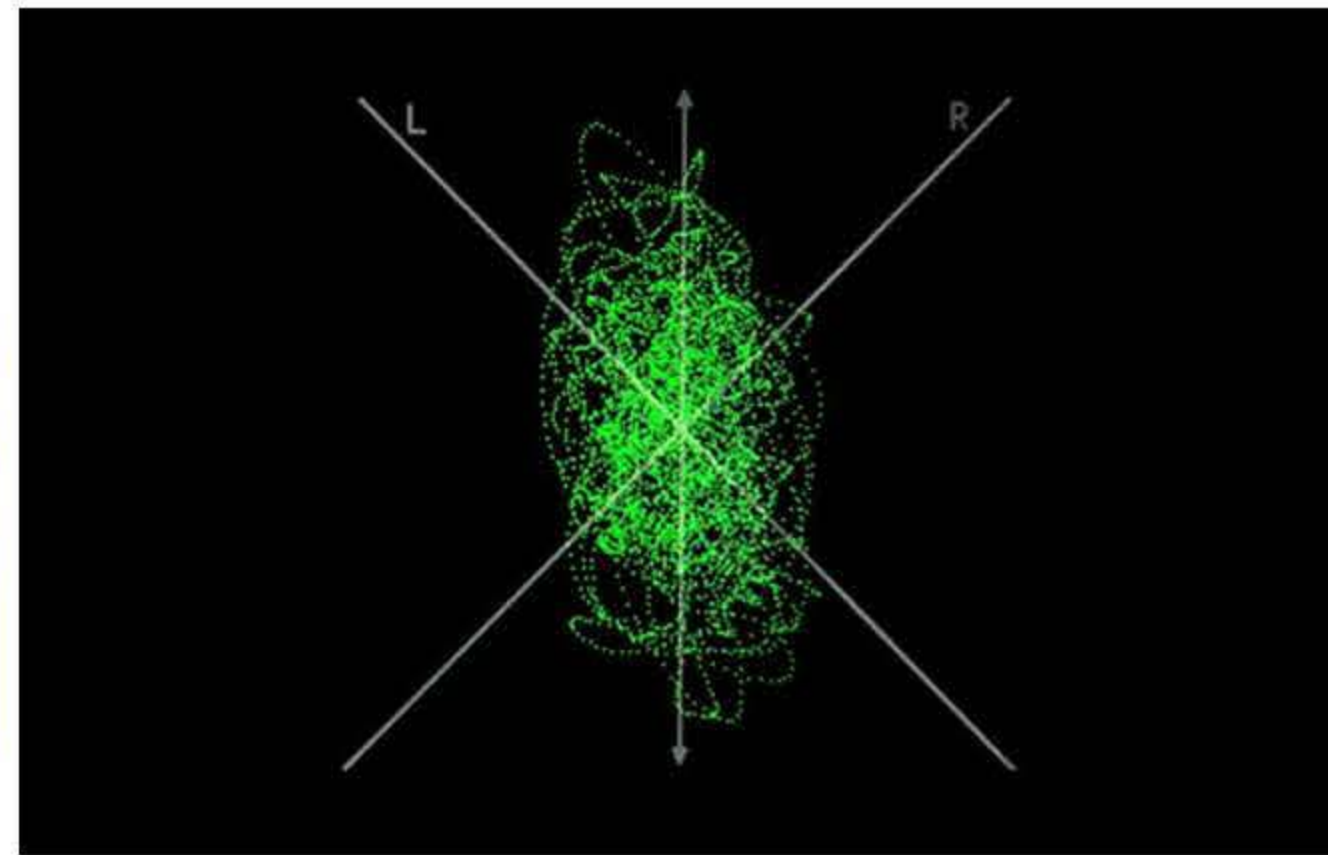

AUDIO VECTOR
(FULL SCREEN)




PEAKING

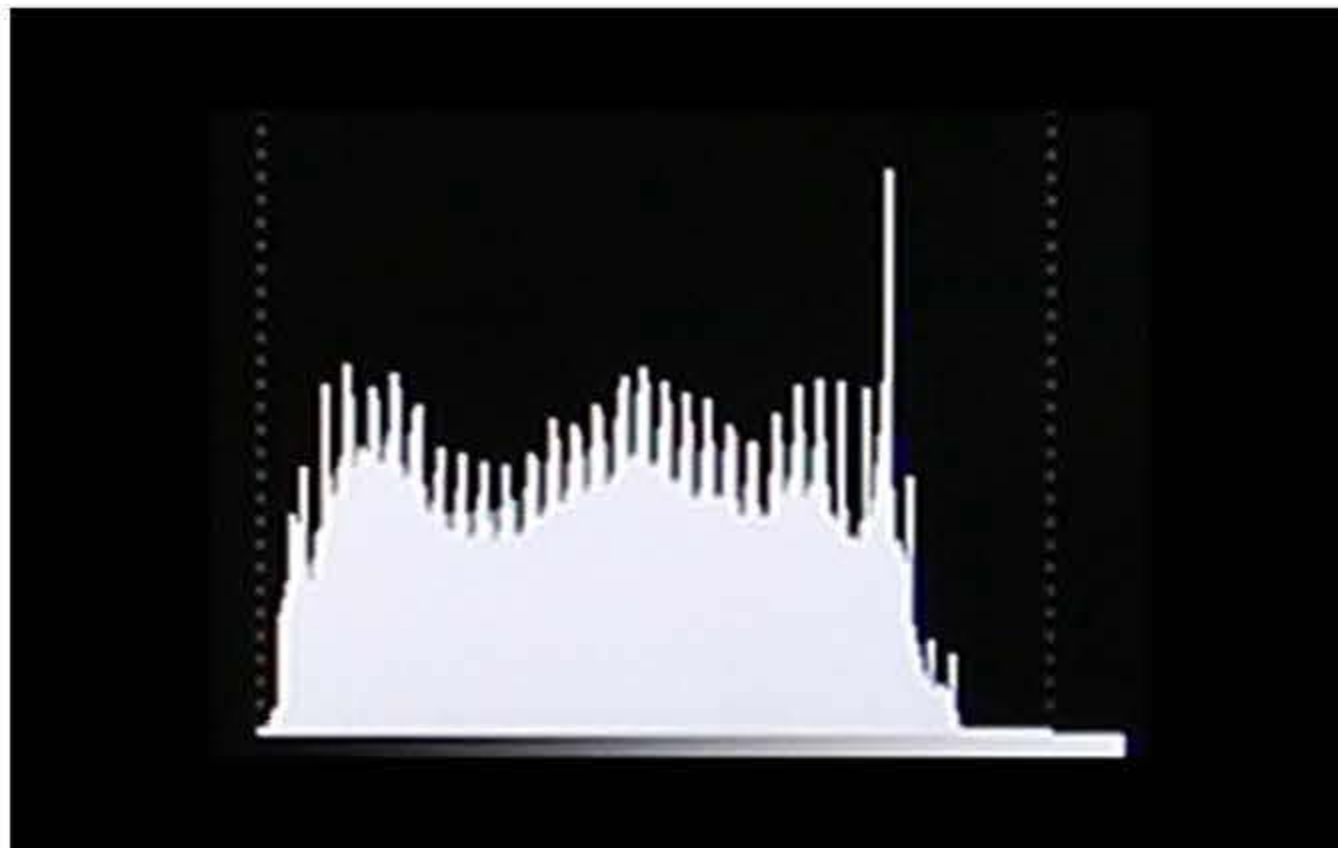

HISTOGRAM
(FULL SCREEN)



LEVEL METER

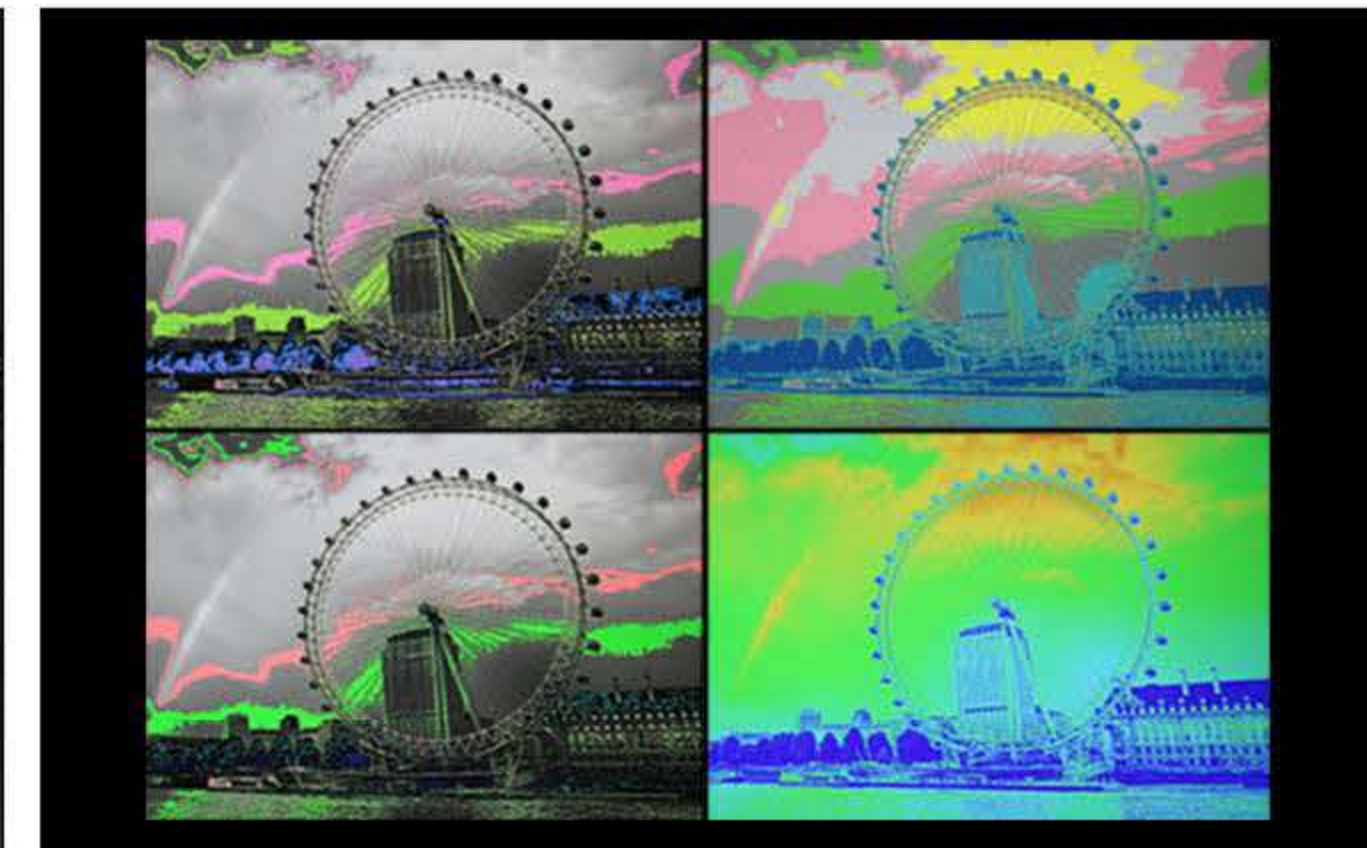

FALSE COLOR

Camera Auxiliary Functions





ACCESSORIES

STANDARD



12V 3A DC Power Adapter



Suitcase



U-shaped Bracket



VESA 75 mm Battery Plate
(For Sony NP-F Series)



Tally Connector

OPTIONAL UNIT



Default

or

V-Lock / AB Battery Plate

WWW.LILLIPUT.COM

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.

Add : Fuqi North Road No.26, Longwen District, Zhang Zhou, Fu Jian, 363005, China

atmonitor Email: sales@lilliput.com

ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches

Tél. 01 47 95 99 80
Fax. 01 47 01 16 22

e-mail : mse@es-france.com
Site Web : www.es-france.com

