

Mport3102-I

2*RS485/422 Serial to Ethernet Isolated Server

Product description

Mport3102-I series products mainly realize the data transmission between Ethernet and serial port (RS485/RS422). This series of products is based on the 32-bit ARM Cortex-M7 main control CPU to realize the function of one Ethernet interface and two independent serial ports to communicate and exchange data. This series of products converts serial devices in the field of industrial automation to the communication format of the Ethernet network, so that RS485/RS422 devices that were previously unable to access the Internet can be easily and flexibly linked to the network.



Features:

- One 100M Ethernet RJ45 port and 2-port RS485/RS422 serial network
- Using 32-bit Arm Cortex-M7 core CPU, up to nearly 400MHz frequency
- External independent hardware watchdog design to prevent crashes
- Lightning protection of Ethernet interface up to 6KV
- RS-485/RS-422 interface up to 4KV surge protection
- Provide industrial grade DC power supply DC9 ~ 36V input
- Support Modbus RTU/ASCII to Modbus TCP conversion
- Support VirtualCOM software management
- Support opto-isolation




Product specifications

Power supply	
Working Voltage	9~36V
Working current	78mA@12V
Network port	
Network port type	10 / 100Mbps, RJ45 interface; adaptive MDI / MDIX cross-connect and auto-flip
Isolation protection	1.5KV isolation protection
Serial port	
Number of serial ports	2* RS485/RS422 working mode, choose one of two
Baud rate	600~460800 (bps)
Data bit	7, 8
Stop bit	1, 2
Validation modes	none, odd parity, even parity
Isolate power supply	3kV
Connector	terminal blocks for RS485/422
Reliability	
ESD	±8kV(contact); ±15kV(air)
Surge	Power supply: ±4kV / common mode, ±4kV/ differential mode
	RS485/ 422: ±4kV / common mode, ±4kV/ differential mode
	Network port: ±6kV/ common mode, ±4kV/ differential mode
EFT	Power supply: ±4kV Communication port: ±2kV
Mechanical structure	
Size	162mm*95mm* 29mm
Working environment	
Operating temperature	-40°C~85°C
Storage temperature	-40°C~85°C
Relative humidity	5%~95% (no condensation)
Software parameters	
Network Protocols	ICMP, IPv4, IP, ARP, TCP, UDP, DHCP, DNS, HTTP, RFC2217
IP acquisition method	Static IP/DHCP
DNS	Support
User configuration	Web configuration
Simple transparent transmission	TCP Server/TCP Client/UDP
Modbus	Support Modbus RTU/ASCII to Modbus TCP(Master & Slave Mode)



	Support Modbus Over TCP Modbus TCP to Modbus RTU
Serial port packaging mechanism	Time and length can be set; The default value varies according to the bit rate; The maximum packing length is 1460 bytes.
TCP Server connection	Support up to 8 TCP connections
Network cache	Send: 16Kbyte; Receive: 16Kbyte
Serial port cache	Send: 1.5Kbyte; Receive: 1.5Kbyte;
Flow Control	Auto Flow Control
Heartbeat bag	Support network port custom heartbeat package
Average transmission delay	<10ms
Supporting software	Network Configuration Tool, VirtualCOM, MWView, MaxView

Dimensional drawing

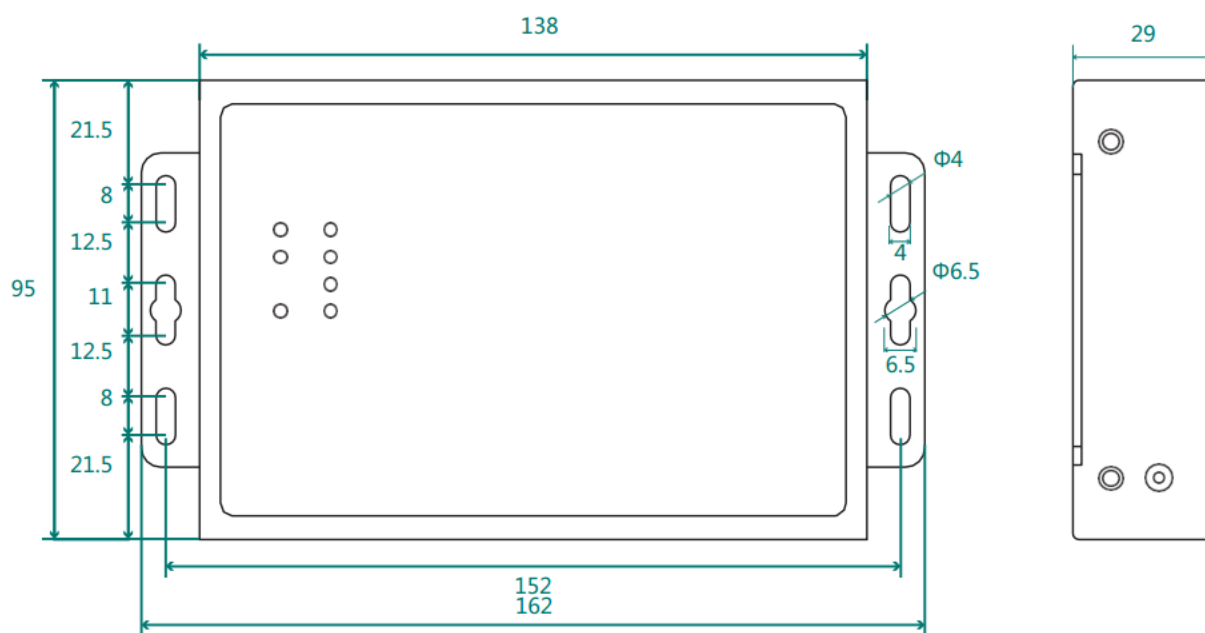

Ordering information

Mport3102-I	2*RS485/RS422 serial to Ethernet device networking server, DC9 ~ 36V wide voltage input, opto-isolation.
-------------	--

Wuhan Maiwe Communication Co., Ltd

Add: No.52 Liufang Avenue, East lake High-tech Development Zone, Wuhan, China.
Tel: 027-87170215/16 Fax: 027-87170217



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com