

ESC N8-E11

ASUS 1st NVIDIA HGX Architecture: The Best Choice for Heavy AI Workloads



7U



2



32

7U NVIDIA HGX H100 8-GPU server with dual 4th Gen Intel Xeon Scalable processors that designed for large scale of AI and HPC, 10+1 or 12+1 PCIe slots, 32 DIMM, 10 NVMe, dual 10G LAN and optional OCP 3.0 socket. NIC and storage are placed close to the GPUs, use a ratio of up to 1:1 GPUs to network interface card and have GPU Direct Storage design could reduce read/write latency. ESC N8-E11 is optimal for cultivating AI advancements for enterprise applications.

FEATURE

- 4th Gen Intel® Xeon® Scalable Processors
- PCIe 5.0 Ready
- Powerful Performance
- Enhanced IT-infrastructure management

4th Gen Intel® Xeon® Scalable Processors

Powered by 4th Gen Intel® Xeon® Scalable Processors with 8-channel, up to 4800 MHz DDR5 and support for a maximum TDP of up to 350 watts per socket

PCIe Gen5.0 Ready

PCI Express® (PCIe®) 5.0 delivers 32 GT/s bandwidth, which is double the speed of PCIe 4.0, offering lower power consumption, better lane scalability and backwards compatibility.

Powerful Performance


Support NVIDIA HGX H100 8-GPUs and connected with latest NVSwitch design. NIC and storage are placed close to the GPUs, use a ratio of up to 1:1 GPUs to network interface card and have GPU Direct Storage design could reduce read/write latency.

Enhanced IT-infrastructure management

ASUS ASMB11-iKVM remote control with ASPEED AST2600, ASUS Control Center IT management software and hardware-level Root-of-Trust solution

Target market

- High Performance Computing
- Generative AI
- Deep Learning/Machine Learning
- Data Analysis
- Scientific Research

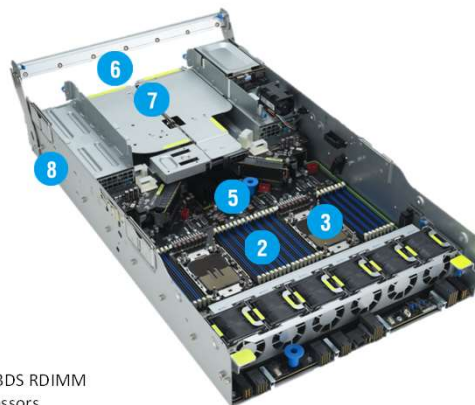

1. Asset Tag
2. 32 x DIMM, DDR5 4800/4400 RDIMM/ 3DS RDIMM
3. 2 x 4th Gen Intel® Xeon® Scalable Processors
4. 8 x HGX H100 GPUs 80G with NVLink NVSwitch
5. 2 x M.2 Gen5x4 (CPU1) & 2 x M.2 Gen3x2 (PCH)
6. 8 x PCI-E x16 (Gen5 x16 link) HHHL
7. SKU1: 1 x PCI-E x16 (Gen5 x16 link) or OCP socket FHHL + 1 x PCI-E x16 (Gen5 x16 link) FHHL
SKU2: SKU1+ 1 x PCI-E x16 (Gen5 x8 link) FHHL + 1 x PCI-E x16 (Gen5 x8 link) FHHL
8. 4+2 or 2+2, Redundant 3000W 80 PLUS Titanium Power Supply



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

ESC N8-E11

SPECIFICATION

Processor Support		Dual Socket
		4th Gen Intel® Xeon® Scalable Processors
Memory	Total Slots	32 (8-channel per CPU, 16 DIMM per CPU)
	Capacity	Maximum up to 4 + 8 TB (DDR5 + Crow Pass)
	Memory Type	DDR5 4800/4400 RDIMM/RDIMM 3DS (2DIMM per Channel) *Please refer to www.asus.com for latest momory AVL update
	Memory Size	512GB, 256GB, 128GB Intel® Optane™ persistent memory 300 series (Crow Pass) * Refer to www.asus.com/support for more information
Expansion Slots	Total PCI/PCI-X/PCI-E/PIKE Slots	11 or 13
	Slot Type	<u>SKU1:</u> 10 + 1* PCIe Gen5 slots (1 x internal RAID Card*)
		[PCIe Switch directly] 8*PCIe Gen5 x16 HHHL (LP)
		[CPU directly] 1*PCIe Gen5 x16 FHHL (CPU1)* + 1*PCIe Gen5 x16 FHHL (CPU2)
		<u>SKU2:</u> (Launch in July) 12 + 1 x PCIe Gen5 slots (1 x internal RAID Card*)
		[PCIe Switch directly] - 8 x PCIe Gen5 x16 HHHL (LP)
		[CPU directly] - 1 x PCIe Gen5 x16 FHHL* (CPU1) + 1 x PCIe Gen5 x16 FHHL* (CPU2) - 1 x PCIe Gen5 x8 FHHL* (CPU1) + 1 x PCIe Gen5 x8 FHHL* (CPU2)
		*Support BlueField2 DPU or BlueField3 DPU with double deck/extension *1 x PCIe Gen5x16 FHHL* (CPU1) also support OCP 3.0 (TFF)
Disk Controller	M.2	2 x M.2 Gen5x4 (CPU1) & 2 x M.2 Gen3x2 (PCH)
	SATA Controller	Intel PCH Integrated
	SAS Controller	Optional Kits: -Broadcom MegaRAID 9560-16i -Broadcom RAID CARD 9540-8i -ASUS PIKE II 3008 8-port HBA Card -ASUS PIKE II 3108 8-port HW RAID Card
Storage Bays	I = internal A or S will be hot-swappable	10 x 2.5" hot-swap drive bays (8 NVMe, 2 NVMe/SATA/SAS*)
		[PCIe Switch directly] Front: 8 NVMe [CPU directly] Rear: 2 NVMe(CPU2)/SATA(PCH)/SAS*
		*SAS support required an HBA/RAID card.
Networking	LAN	2 x 10 Gigabit LAN ports (Intel X710-AT2 Controller) 1 x Management Port
Graphic	VGA	Aspeed AST2600 64MB
Front I/O Ports		4 x USB3.2 Gen1 ports 1 x VGA port 2 x 10Gb RJ45 LAN module (Intel-x710 Based) 1 x Mgmt LAN 1 x locate button 1 x power button
Rear I/O Ports		1 x locate button 1 x power button



SPECIFICATION

Switch/LED		Front : 1 x Power Button/LED 1 x Location Button/LED 1 x Message LED 1 x Q-Code/Port 80 LED Rear : 1 x Location LED 1 x Power Button/LED
OS Support		Windows Server RedHat® Enterprise Linux Rocky Ubuntu VMware *Please find the latest OS support from https://www.asus.com/event/Server/OS_support_list/OS.html
Management Solution	Software	ASUS Control Center
	Out of Band Remote Management	On-Board ASMB11-iKVM
Dimension		885mm x 447mm x 306.65mm
Net Weight Kg (CPU, DRAM & HDD not included)		99 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		154 kg
Power Supply (following different configuration by region)		4+2 or 3+3 3000W 80 PLUS Titanium Power Supply
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)



ESC N8-E11 with Front Bezel (Optional)

