

陶瓷 三辊机

Three Roll Mill

产品机型
ZYTR-80E Plus

产品特点 Product features

- 高精度研磨（最小精度可达 $1\mu\text{m}$ 以下，视物料固有性质而定）
High precise(Minimum $1\mu\text{m}$, depend on materials)
- 进口纳米级陶瓷辊
Import nanoscale ceramics roller
- 精密打磨易清洁辊筒
Easy-cleaning roller
- 选配加料斗
Hopper(optional)
- 可视化电子触摸屏控制
Touch screen
- 瓷辊精度:同心度 $<2\mu\text{m}$ 、直线度 $<2\mu\text{m}$ 、表面平整度 $<0.2\mu\text{m}$
Ceramic roller precision:concentricity $<2\mu\text{m}$, linear degree $<2\mu\text{m}$ exterior planeness $<0.2\mu\text{m}$



设备型号	Equipment Type	ZYTR-80E Plus
产能	L/hour	0.02-20L/hour
瓷辊材料	Roller Material	$\text{Al}_2\text{O}_3/\text{ZrO}_2/\text{SiC}/\text{Si}_3\text{N}_4$
刀片材质	Scraping knife material	$\text{Al}_2\text{O}_3/\text{ZrO}_2$ / 不锈钢Stainless / 聚酯Polyester
瓷辊直径	Roller Diameter	80mm
瓷辊长度	Roller Length	200mm
转速比	Ratio of Transmission	1:3:9
动力配置	Power Configuration	伺服电机 Servo motor
选配	Option	轧辊可加热或冷却 Heating and cooling design for the rolls
尺寸	Size	(长x宽x高) L860mmxW460mmxH530mm
功率 电压	Power ,Voltage	2.0KW,220V
净重	Net Weight	70公斤 70KG



ES France - Département Bio-tests & Industries
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90
Fax. 01 47 01 16 22




e-mail : bio@es-france.com
Site Web : www.es-france.com

产品机型
ZYTR-80E Plus

工业4.0
Industry 4.0

压力曲线
Force Curve

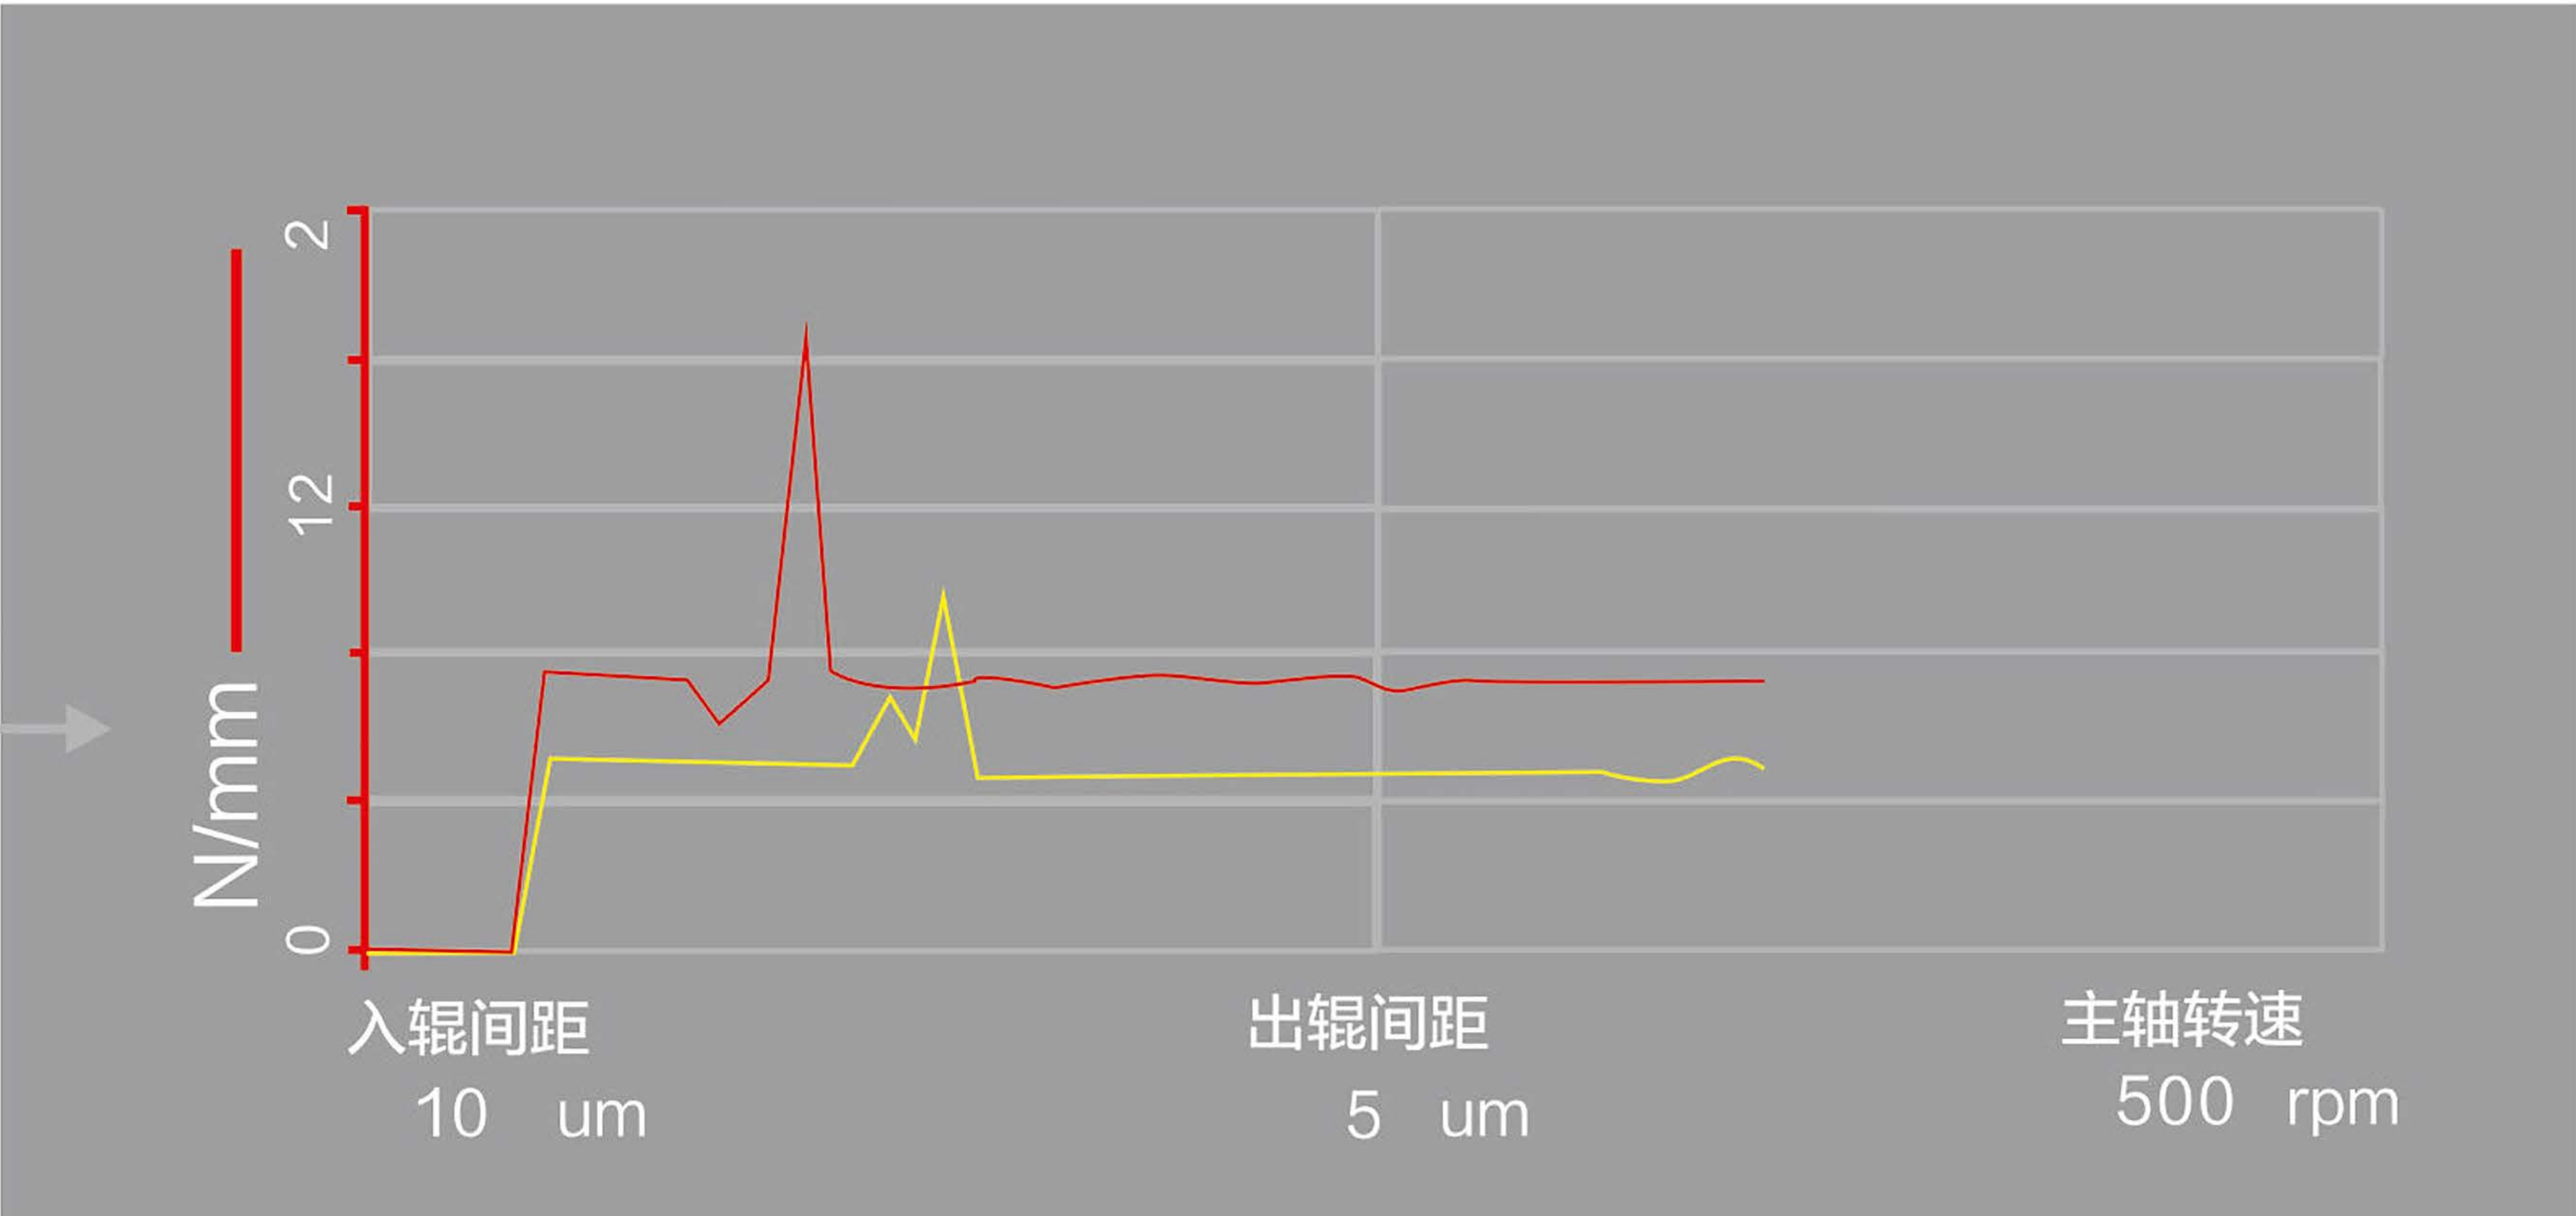


辊筒温度独立调节（可选）

The temperature of each roller can be adjusted independently (optional)

间隙模式
Gap Control Mode

压力模式
Force Control Mode

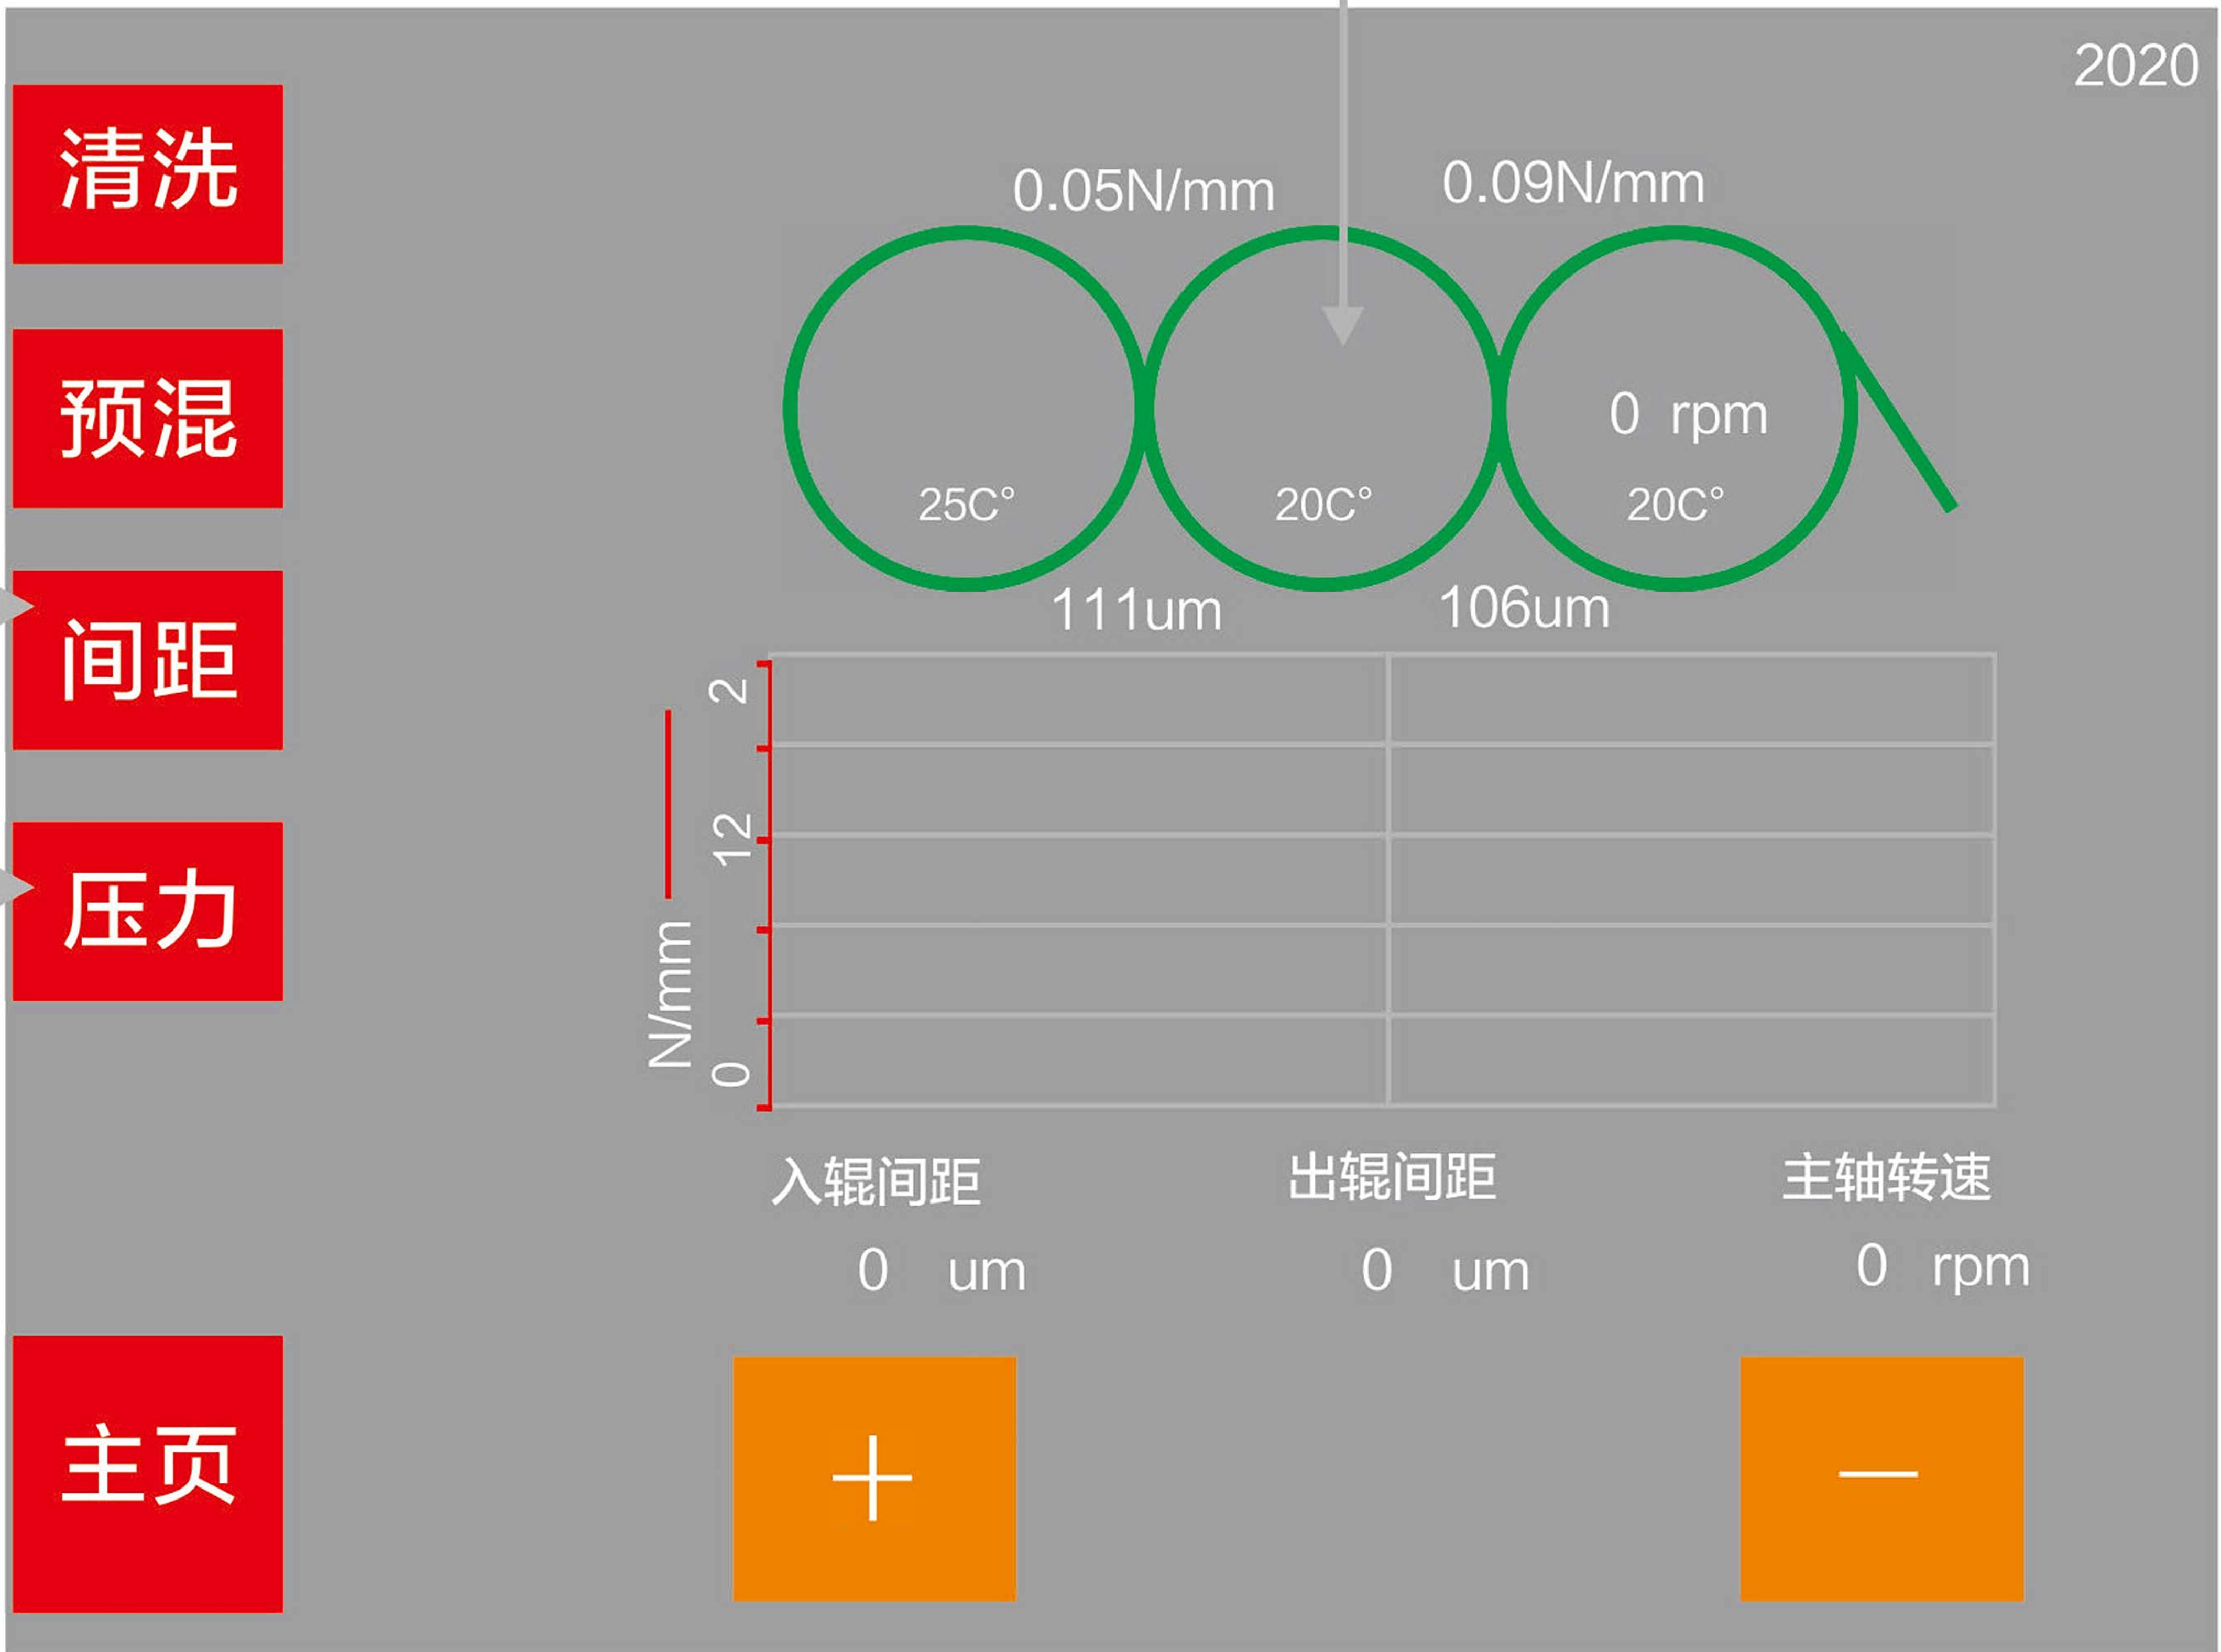

运行数据，可导出：可在线联网



ES France - Département Bio-tests & Industries
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90
Fax. 01 47 01 16 22



e-mail : bio@es-france.com
Site Web : www.es-france.com