
Ettus USRP X440 Specifications

2023 09 21



ES France - Département NI
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 71
Fax. 01 47 01 16 22



e-mail : ni@es-france.com
Site Web : www.es-france.com

Contents

Ettus USRP X440 Specifications.....	3
-------------------------------------	---

Ettus USRP X440 Specifications

Key Specifications

RF capabilities	8 TX, 8 RX, independently tunable Direct sampling transceiver 30 MHz to 4 GHz Up to 1.6 GHz bandwidth per channel Up to 3.2 GHz aggregated bandwidth per USRP
Processing system (PS)	Quad Core ARM Cortex-A53 (1200 MHz) 4 GB DDR4
Programmable logic (PL)	FPGA: RFSoc ZU28DR 2 × 4 GB DDR4
Software	UHD version 4.5 or later RFNoC GNU Radio C/C++ Python OpenEmbedded Linux on A53



Synchronization	REF IN (clock reference input) PPS IN (PPS time reference) TRIG IN/OUT GPSDO included OCXO included Sync In Port (for future use)
Digital interfaces	2 QSFP28 (10/100 GbE) Ethernet (1 GbE to PS) 2 USB-C (USB to PS, Console/JTAG) 2 HDMI (GPIO)
Power, form factor	12 V DC, 16 A maximum Half-wide RU 28.5 cm × 22.2 cm × 4.4 cm

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.



- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Characteristics** unless otherwise noted.

Conditions

Unless otherwise noted, these specifications are valid under the following conditions:

- Converter Rate 2.94912 GSps
- Master Clock Rate 368.64 MHz
- FPGA Bitfile X440_X4_400
- IQ Mode
- UHD 4.5
- 23 °C ± 5 °C

Controller

Processing System

CPU	Quad Core ARM Cortex-A53 (1200 MHz)
Memory	4 GB DDR4, 2.4 GT/s
NVM	16 GB eMMC (Pseudo SLC)
RJ45	1 GbE host connection
USB-C	USB to PS (USB 2.0) USB Console/JTAG



Programmable Logic

FPGA	Xilinx RFSoc XCZU28DR Speed Grade -2
Memory	2 × 4 GB DDR4, 2.4 GT/s
SD-FEC	8 dedicated SD-FEC cores
QSFP28	2 × 4 lanes 10/100 GbE
GPIO	2 HDMI 12 I/O lines per connector Maximum data rate 100 Mbps Selectable I/O voltage (3.3 V, 2.5 V, or 1.8 V)
Trigger	SMA: Trigger In/Out (3.3 V I/O voltage)

DRAM Performance



Note The Replay Block allows users to record and playback RF data using the onboard DRAM. DRAM capabilities were validated with the maximum allowed Master Clock Rate for shipping bitfiles.

FPGA Bitfile	DRAM Throughput at 16-bit I/Q Samples	Application
X440_X4_400	8 channels at ~450 MSps each	Simultaneous Record and Playback

FPGA Bitfile	DRAM Throughput at 16-bit I/Q Samples	Application
X440_X4_1600	6 channels at 500 MSps each	Simultaneous Record and Playback
	8 channels at 500 MSps each	Record or Playback
	2 channels at 2 GSps each	Simultaneous Record and Playback

Baseband

Maximum I/Q sample rates ¹	2 GSps
Number of available channels	Up to 8
ADC resolution	12 bit
DAC resolution	14 bit

Transmitter

Number of channels	Up to 8
Analog frequency range	30 MHz to 4 GHz
Frequency step	< 1 Hz
Maximum output power ²	0 dBm
TX/RX settling time	0.3 μ s
Maximum instantaneous real-time bandwidth	Up to 1.6 GHz
TX phase noise, 1 GHz carrier frequency, 23 °C, nominal	
1 kHz offset	-91 dBc/Hz

¹ The applicable maximum value depends on the Master Clock Rate selected in software.

² Maximum output power varies by selected Master Clock Rate and frequency.

10 kHz offset	-101 dBc/Hz
100 kHz offset	-103 dBc/Hz

TX Measurements



Note The following figures depict the average TX Maximum Output Power and TX EVM based on 2 units with 16 channels total measured.

Figure 1. TX Maximum Output Power: 0 dBFS CW, 1 GSps Converter Rate, 0 Hz Waveform Frequency

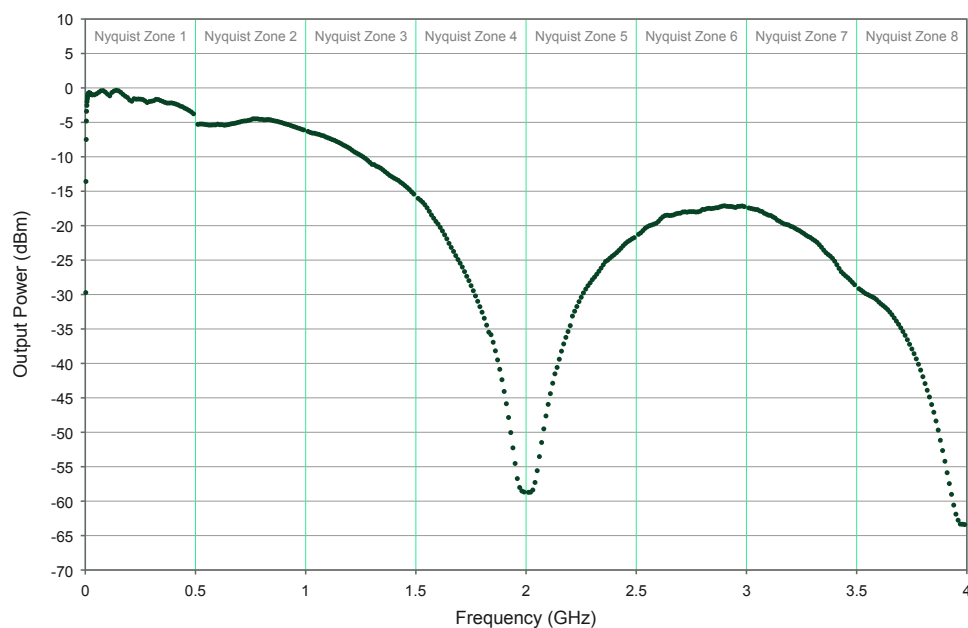


Figure 2. TX Maximum Output Power: 0 dBFS CW, 2.94912 GSps Converter Rate, 0 Hz Waveform Frequency


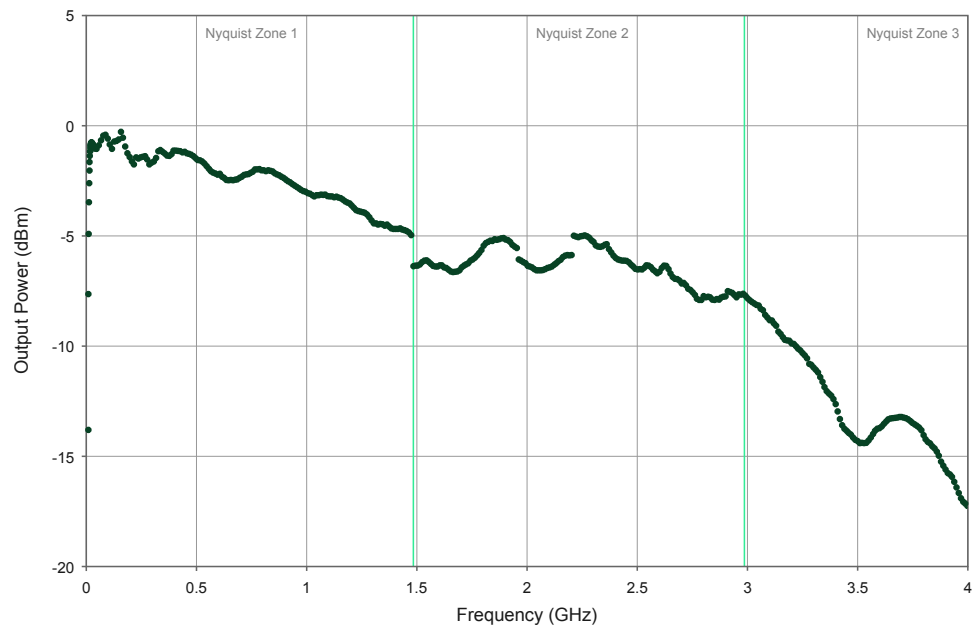


Figure 3. TX EVM Bathtub Curves: 5G NR, UL, FDD, SISO, 100 MHz BW, 30 kHz SCS, 256 QAM

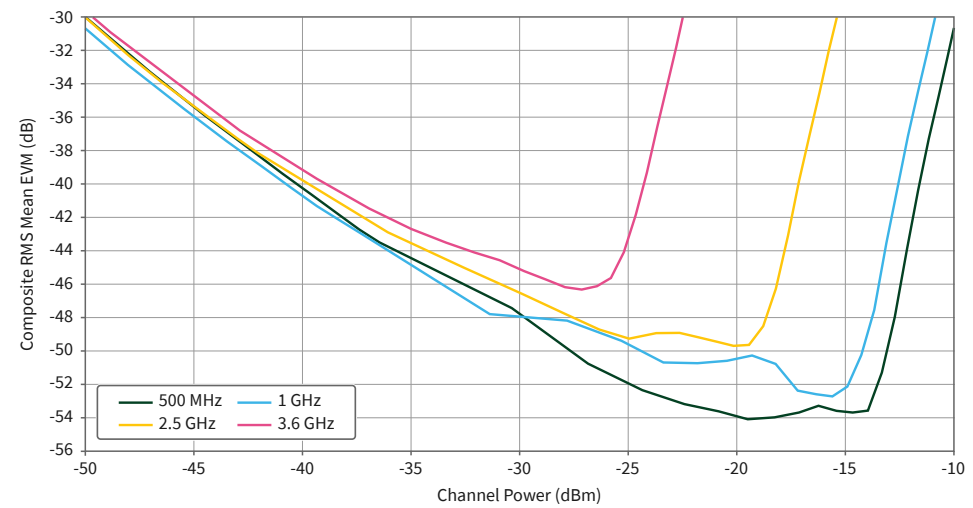

 **Note** The following tables depict the isolation performance of the transmitter based on 2 units with a total of 16 channels at 23°C. The transmitter channel was set to 0 dBFS. Minimum represents the worst performing channel-to-channel combination measured. Average

represents the mean value of all channel-to-channel combinations measured.

TX-TX Isolation

Frequency	Minimum	Average	Units
500 MHz	69	108	dBc
2 GHz	58	103	
3.5 GHz	49	92	

TX-RX Isolation

Frequency	Minimum	Average	Units
500 MHz	74	88	dBc
2 GHz	61	80	
3.5 GHz	51	68	

Receiver

Number of channels	Up to 8
Analog frequency range	30 MHz to 4 GHz
Frequency step	< 1 Hz
Maximum instantaneous real-time bandwidth	Up to 1.6 GHz
Maximum input power, damage level	
< 2.5 GHz	+13 dBm continuous
2.5 GHz – 3.6 GHz	+17 dBm continuous



3.6 GHz – 4 GHz

+20 dBm continuous

RX Measurements



Note The following figures depict the average RX input power to reach 0 dBFS and RX EVM based on 2 units with a total of 16 channels measured.

Figure 4. RX Input Power to Reach 0 dBFS: CW Input


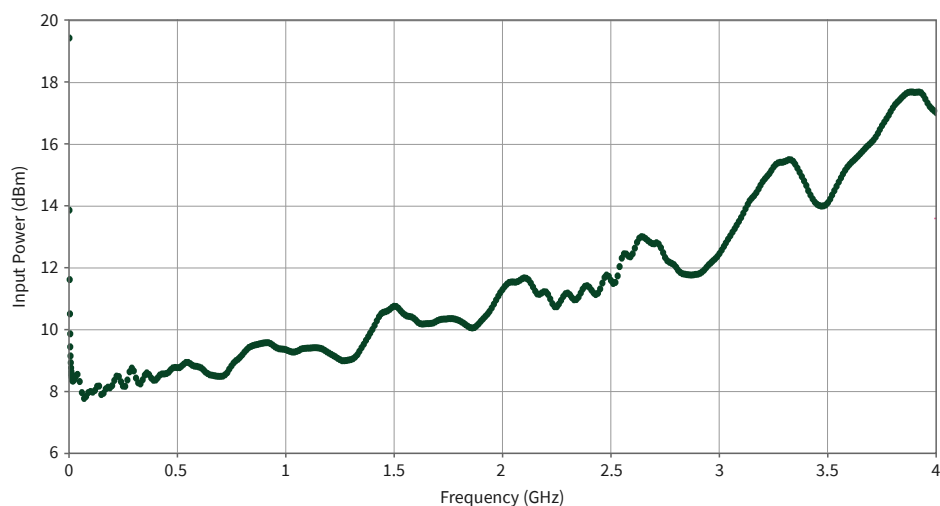


Figure 5. RX EVM Bathtub Curves: 5G NR, UL, FDD, SISO, 100 MHz BW, 30 kHz SCS, 256 QAM



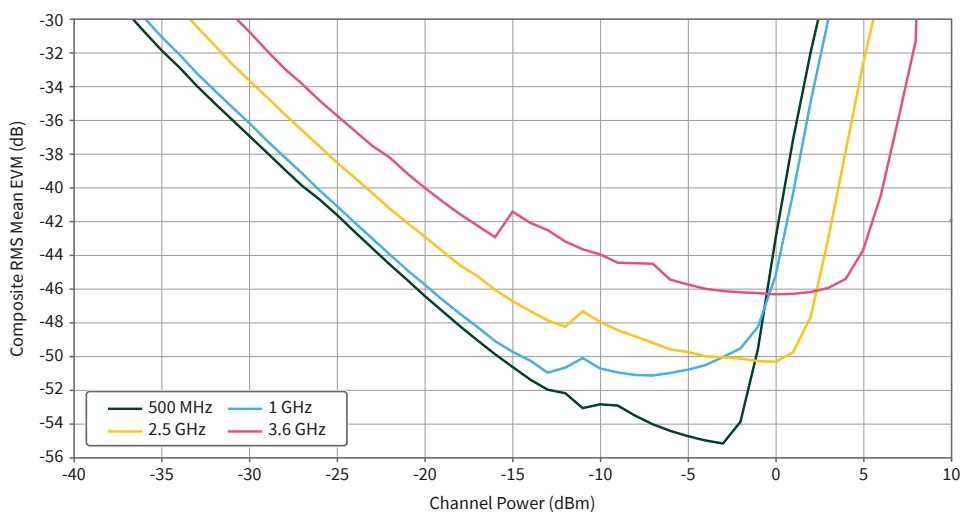

Note The following tables depict the isolation performance of the receiver based on 2 units with 16 channels total measured at 23°C. The input power of the source channel was kept at a level of -2 dBFS. Minimum represents the worst performing channel-to-channel combination measured. Average represents the mean value of all channel-to-channel combinations measured.

RX-TX Isolation

Frequency	Minimum	Average	Units
500 MHz	93	117	dBc
2 GHz	83	107	
3.5 GHz	72	116	

RX-RX Isolation

Frequency	Minimum	Average	Units
500 MHz	71	95	dBc
2 GHz	56	93	
3.5 GHz	55	99	

Phase Stability

Measurement Conditions

Master Clock Rate [Hz]	Converter Rate [GSps]	Carrier Frequency [GHz]	FPGA Bitfile
125e6	1	0.8	X440_X4_400
307.2e6	2.4576	1.69	X440_X4_400
360e6	2.88	1.95	X440_X4_400



Master Clock Rate [Hz]	Converter Rate [GSps]	Carrier Frequency [GHz]	FPGA Bitfile
368.64e6	2.94912	2.4	X440_X4_400
400e6	3.2	2.6	X440_X4_400
500e6	4	2.75	X440_X4_400
1000e6	4	3	X440_X4_1600
2000e6	4	3	X440_X4_1600

Configured Baseband Stimulus

Wideband Signal	Carrier frequency in the second Nyquist Zone
Duration	2 hours

Configuration

Same Device	Stimulus simultaneously transmitted and received at up to four channels on the same USRP
Device-to-Device	Stimulus simultaneously transmitted and received at up to four channels on a separate USRP

Synchronization

Shared 10 MHz Square Wave Reference	Sourced from OctoClock-G CDA-2990
Shared PPS	Sourced from OctoClock-G CDA-2990



Note The following tables depict the stability of the channel-to-channel phase. The stability was measured on 2 units with up to 8 channels total (up to 4 channels each) measured at 23°C after device warmup.



TX Phase Stability

Master Clock Rate [Hz]	Same Device		Device-to-Device	
	Peak-to-Peak [deg]	RMS [deg]	Peak-to-Peak [deg]	RMS [deg]
125e6	< 1	< 0.2	< 2	< 0.35
307.2e6	< 1.7	< 0.35	< 3.5	< 0.55
360e6	< 2	< 0.35	< 4	< 0.65
368.64e6	< 2.6	< 0.4	< 5	< 0.8
400e6	< 2.6	< 0.45	< 5.3	< 0.85
500e6	< 2.5	< 0.45	< 5.5	< 0.85
1000e6	< 1	< 0.15	< 3.8	< 0.6
2000e6	< 0.8	< 0.15	< 4	< 0.6

RX Phase Stability

Master Clock Rate [Hz]	Same Device		Device-to-Device	
	Peak-to-Peak [deg]	RMS [deg]	Peak-to-Peak [deg]	RMS [deg]
125e6	< 0.15	< 0.1	< 1.5	< 0.2
307.2e6	< 0.15	< 0.1	< 2.5	< 0.35
360e6	< 0.25	< 0.1	< 2.5	< 0.4
368.64e6	< 0.5	< 0.1	< 3.5	< 0.5
400e6	< 0.4	< 0.1	< 3.5	< 0.55
500e6	< 0.3	< 0.1	< 3.5	< 0.6
1000e6	< 0.35	< 0.1	< 4	< 0.6
2000e6	< 0.35	< 0.1	< 4	< 0.6

GPS Disciplined Oscillator (GPSDO)

Frequency accuracy³	
OCXO (not locked to GPS) ⁴	2.5 ppm
OCXO (locked to GPS)	5 ppb
Active antenna	
Voltage	3.3 V
Power	0.19 W
Frequency band(s)	L1, C/A 1.574 GHz

Power



Notice The protection provided by this product may be impaired if it is used in a manner not described in this document.

Voltage range	12 V $\pm$ 5%, DC
Current	16 A, maximum
Power	200 W, maximum



Notice The power supply must also meet any safety and compliance requirements for the country of use.

³ **Frequency accuracy** is based on oven-controlled crystal oscillator (OCXO) vendor specifications and is not measured. Alternatively, you can incorporate an external reference source to provide a more precise frequency Reference Clock and to achieve better frequency accuracy.

⁴ Factory default accuracy. Contact NI if your application requires tuning the OCXO output frequency.





Note NI recommends using the Ettus USRP X440 with the provided power supply (part number 723704-01). Contact NI if a replacement is needed.

Physical Characteristics

Dimensions

Enclosure	26.7 cm × 22.2 cm × 4.4 cm (10.5 in. × 8.7 in. × 1.7 in.)
Enclosure and connectors	28.5 cm × 22.2 cm × 4.4 cm (11.2 in. × 8.7 in. × 1.7 in.)
Weight	2.7 kg (6 lb)

Ventilation Clearance and Cooling

This product is designed to operate on a bench or in an instrument rack. Fan vents are located at the back of the product. Standard airflow provision of the product is set up as front to back cooling with option to change the airflow direction in the interest for directing back to front cooling using a fan cartridge accessory.

Adequate clearance is required at the front and back of the product and surrounding equipment, inclusive of indiscriminate heat generating devices, and any potential air flow blockages must be maintained to ensure proper cooling.

Minimum cooling clearances	51 mm (2 in.) at the front and back
----------------------------	-------------------------------------



Note Benchtop and rack mount applications may require additional cooling clearances for optimal airflow and to reduce any unexpected hot air recirculation in either direction of the air inlet fans.



Environment

Environmental Characteristics

Operating temperature range	0 °C to 55 °C
Storage temperature range	-40 °C to 71 °C
Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Operating humidity range	10% to 90%, noncondensing
Storage humidity range	5% to 95%, noncondensing
Pollution Degree	2

Environmental Standards

This product meets the requirements of the following environmental standards for electrical equipment.

- IEC 60068-2-1 Cold
- IEC 60068-2-2 Dry heat
- IEC 60068-2-78 Damp heat (steady state)
- IEC 60068-2-64 Random vibration
- IEC 60068-2-27 Shock



Note To verify marine approval certification for a product, refer to the product label or visit **ni.com/certification** and search for the certificate.

Shock and Vibration

Operating vibration	5 Hz to 500 Hz, 0.3 g RMS
Non-operating vibration	5 Hz to 500 Hz, 2.4 g
RMS operating shock	30 g, half-sine, 11 ms pulse



Non-operating shock

50 g, half-sine, 11 ms pulse

