



ET-72400

Series




SMD Type Current Sensor

- High Current – primary rated for 35 Amps.
- Designed for automatic pick and place.
- Operating frequency range up to 200kHz.





ET-72400


Series

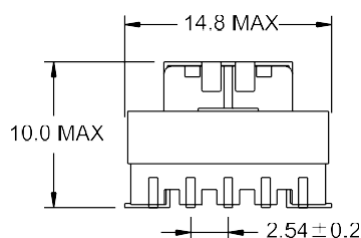

(BOTTOM VIEW)

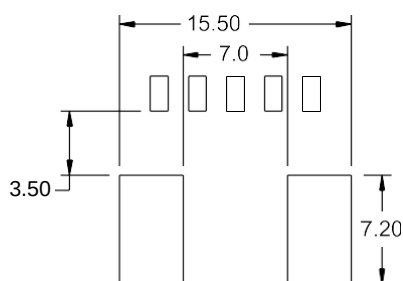

RECOMMENDED PCB LAYOUT



UNIT : mm

Electrical Specifications at 25°C — Operating Temperature -25°C to 125°C

Part Number	DIM (L*W*H)	PIN No.	Turn Ratio	Current (A)	Core Material
ET-72401	18.5 * 14.8 * 10.0	10	1:30	35	Ferrite
ET-72402	18.5 * 14.8 * 10.0	10	1:50	35	Ferrite
ET-72403	18.5 * 14.8 * 10.0	10	1:70	35	Ferrite
ET-72404	18.5 * 14.8 * 10.0	10	1:100	35	Ferrite
ET-72405	18.5 * 14.8 * 10.0	10	1:200	35	Ferrite
ET-72406	18.5 * 14.8 * 10.0	10	1:300	35	Ferrite