



ET-72100

Series


Through-Hole Type Current Sensor

- Primary and secondary furnished.
- Designed for switch mode power supply.
- Encapsulated with plastic housing and potting.
- 3750Vrms primary to secondary Hi-pot.
- Frequency range 20KHz to 200KHz.






ET-72100

Series



(TOP VIEW)

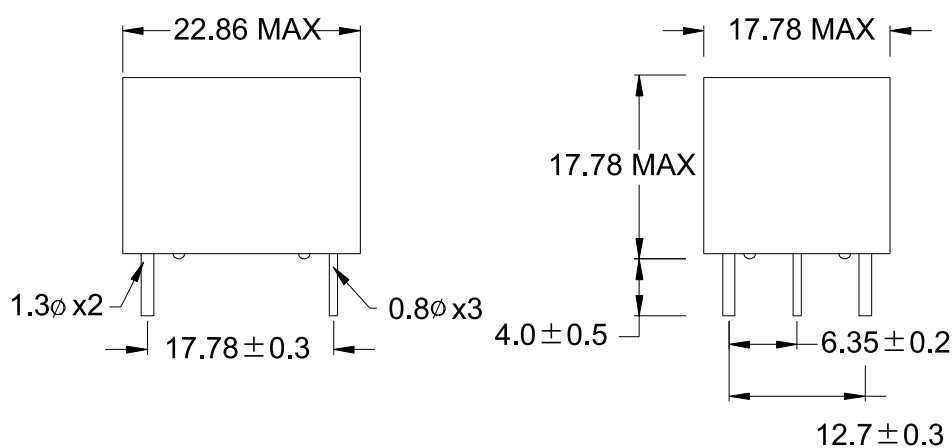

UNIT:mm

Electrical Specifications at 25°C — Operating Temperature -25°C to 125°C

Part Number	DIM (L*W*H)	PIN No.	Turn Ratio	Current (A)	Core Material
ET-72101	22.9 * 17.8 * 21.8	4	1:50	20	Ferrite
ET-72102	22.9 * 17.8 * 21.8	4	1:100	20	Ferrite
ET-72103	22.9 * 17.8 * 21.8	4	1:200	20	Ferrite
ET-72104	22.9 * 17.8 * 21.8	4	1:300	20	Ferrite
ET-72105	22.9 * 17.8 * 21.8	5	1:50 CT	20	Ferrite
ET-72106	22.9 * 17.8 * 21.8	5	1:100 CT	20	Ferrite
ET-72107	22.9 * 17.8 * 21.8	5	1:200 CT	20	Ferrite
ET-72108	22.9 * 17.8 * 21.8	5	1:300 CT	20	Ferrite

elytone



ES France - Département Composants & Modules
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 89
Fax. 01 47 01 16 22



e-mail : comp@es-france.com
Site Web : www.es-france.com