



ET-72600

Series





SMD Type Current Sensor

- High Current – primary rated for 35 Amps.
- Designed for automatic pick and place.
- Operating frequency range up to 200kHz.
- Low profile - height at 7mm maximum.



ET-72600

Series

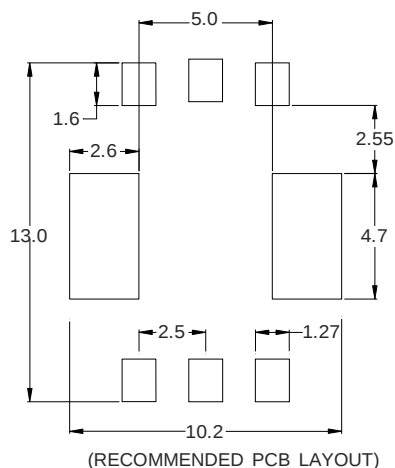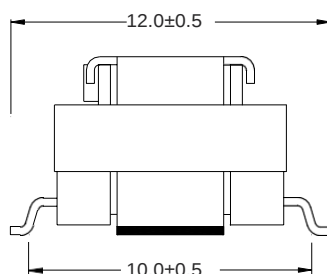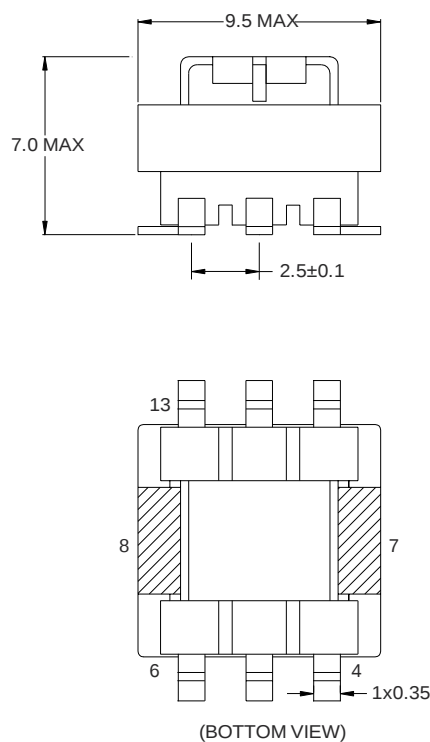

UNIT : mm

Electrical Specifications at 25°C — Operating Temperature -25°C to 125°C

Part Number	DIM (L*W*H)	PIN No.	Turn Ratio	Current (A)	Core Material
ET-72601	12.0 * 9.5 * 7.0	6	1:30	35	Ferrite
ET-72602	12.0 * 9.5 * 7.0	6	1:50	35	Ferrite
ET-72603	12.0 * 9.5 * 7.0	6	1:70	35	Ferrite
ET-72604	12.0 * 9.5 * 7.0	6	1:100	35	Ferrite
ET-72605	12.0 * 9.5 * 7.0	6	1:200	35	Ferrite
ET-72606	12.0 * 9.5 * 7.0	6	1:300	35	Ferrite