



# ET-72000

## Series


### Through-Hole Type Current Sensor

- Secondary furnished.
- Designed for switch mode power supply.
- 2500Vrms primary to secondary Hi-pot.
- Frequency range 20KHz to 200KHz.
- Encapsulated construction.
- Customize available.



# ET-72000

## Series

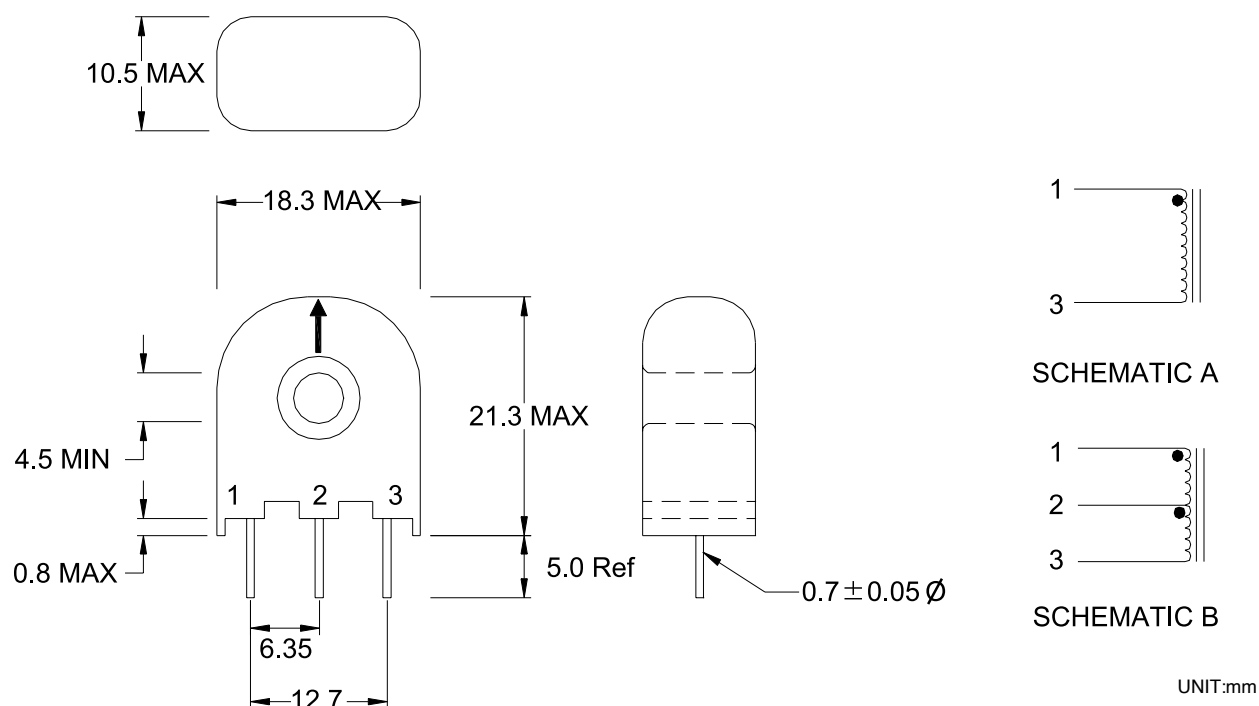

### Electrical Specifications at 25°C — Operating Temperature -25°C to 125°C

| Part Number | DIM (L*W*H)        | PIN No. | Turn Ratio | Current (A) | Core Material |
|-------------|--------------------|---------|------------|-------------|---------------|
| ET-72001    | 26.3 * 18.3 * 10.5 | 2       | 1:50       | 20          | Ferrite       |
| ET-72002    | 26.3 * 18.3 * 10.5 | 2       | 1:100      | 20          | Ferrite       |
| ET-72003    | 26.3 * 18.3 * 10.5 | 2       | 1:200      | 20          | Ferrite       |
| ET-72004    | 26.3 * 18.3 * 10.5 | 2       | 1:300      | 20          | Ferrite       |
| ET-72005    | 26.3 * 18.3 * 10.5 | 2       | 1:50 CT    | 20          | Ferrite       |
| ET-72006    | 26.3 * 18.3 * 10.5 | 2       | 1:100 CT   | 20          | Ferrite       |
| ET-72007    | 26.3 * 18.3 * 10.5 | 2       | 1:200 CT   | 20          | Ferrite       |
| ET-72008    | 26.3 * 18.3 * 10.5 | 2       | 1:300 CT   | 20          | Ferrite       |