

NOVA Fiber

5G and fronthaul monitoring with the OTH-7000

use
case

EXFO



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com

Benefits

Ensure 'first-time right' fiber buildout with mobile app testing to reduce return visits

Automated segment-by-segment baselining and threshold setting

Automated alerting upon deviations from baseline

Reduced MTTR with rapid detection and fault on map localization

Use case description

EXFO's Nova Fiber meets a wide variety of fiber monitoring needs. When used with the OTH-7000 optical test head, it is ideal for applications such as 5G and fronthaul monitoring, particularly during the buildout phase.

A typical use case for this solution would be when testing and monitoring fronthaul optical networks from the distributed unit (DU) to the radio unit (RU), so as to ensure the connectivity, integrity and possibly the security of these links.

The illustration below shows where the unit would be placed to conduct monitoring.

5G and fronthaul

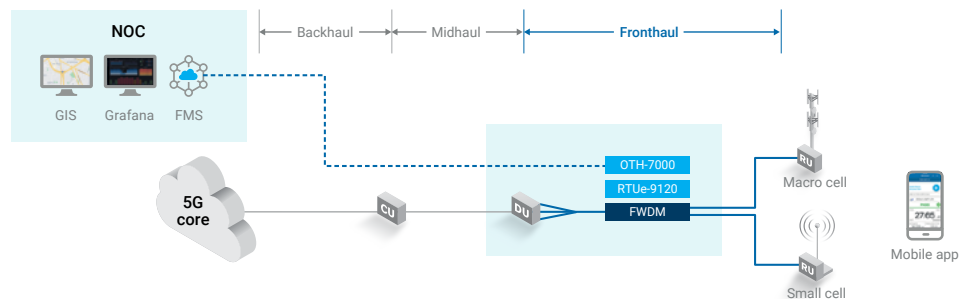


Figure 1. 5G and fronthaul (option 1)

End-to-end monitoring options and results

Conducting end-to-end monitoring with Nova Fiber and the OTH-7000 provides centralized testing with mobile app test execution and results. This not only reduces the need for complex, expensive field test equipment, but also provides valuable analytics to detect trends in loss changes, allowing you to ensure that your 5G buildout is done right the first time.

What to look for

- Changes in end-to-end loss – including breaks and degradations
- Location and identification of the loss (i.e., which segment, fiber, splice, connector, distance from OTDR)
- Who to assign the issue to (i.e., contractor or own maintenance group)
- Geo-location of fault: pinpoint where along the route or identify physical landmarks to help locate fault
- Source of loss: macro-bend, disconnect, misconnect, damaged cable (natural cause, accidental or malicious)



Learn more

Products and solutions

[Nova Fiber solution brief](#)

[Nova Fiber - Remote fiber testing system](#)

[OTH-7000 - Remote optical test head \(Part of Nova Fiber\)](#)

Webinar


[Fiber monitoring-the missing piece in the broadband and 5G networks monitoring puzzle](#)

Dimensioning for SLA considerations

Scan time

| 1 fiber | 8 fibers | 16 fibers |
|--------------|---------------------------|----------------------------|
| 3 s | 24 s | 48 s |
| 5 s | 40 s | 80 s (i.e., 1 min 20 s) |
| 50 s (~iOLM) | 400 s (i.e., 6 min 40 s) | 800 s (i.e., 13 min 20 s) |
| 60 s | 640 s (i.e., 10 min 40 s) | 1280 s (i.e., 21 min 20 s) |

The evolving transport network

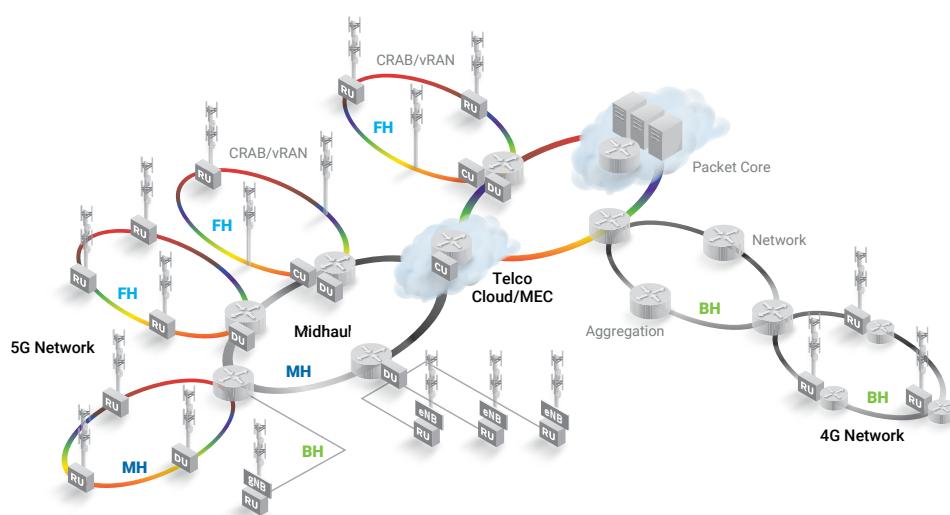

| Fronthaul (DU-RU) | Midhaul (CU-DU) | Backhaul (CU-Core network) |
|-----------------------------|------------------|----------------------------|
| Ethernet packets | Carrier Ethernet | Carrier Ethernet |
| eCPRI Protocol | F1 Interface | S1 Interface |
| Range: 1-10 km | Range: ~40-80 km | Range: up to 200 km |
| Hops: ~8 | Hops: ~15 | Hops: ~15 |
| Latency constraints: 100 us | Latency: ~1 ms | Latency: ~1 ms |

Figure 2. The evolving transport network

EXFO serves over 2000 customers in more than 100 countries.



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com