

Bailers

Geotech Geobailer Reusable Bailers

Geotech reusable bailers provide a simple and cost effective way to collect groundwater samples from monitoring wells. These ready to use bailers feature long lasting materials of construction and are easy to clean.

Our PVC Geobailers are PFAS-free and our Stainless Steel Geobailers can be ordered PFAS-free as well.

FEATURES

White PVC Geobailers


- An economical reusable bailers constructed of white PVC material
- PFAS-free
- Available with either a standard check ball, recessed check ball, or recessed double check balls

Clear PVC Geobailers

- Constructed with transparent PVC material
- Great for viewing hydrocarbon layers
- PFAS-free
- Available with either a standard check ball, recessed check ball, or recessed double check balls

Stainless Steel Geobailers

- Rugged 316 Stainless Steel material
- The most durable and long lasting Geobailer
- Available with Viton® or PFAS-free O-rings – specify at time of order

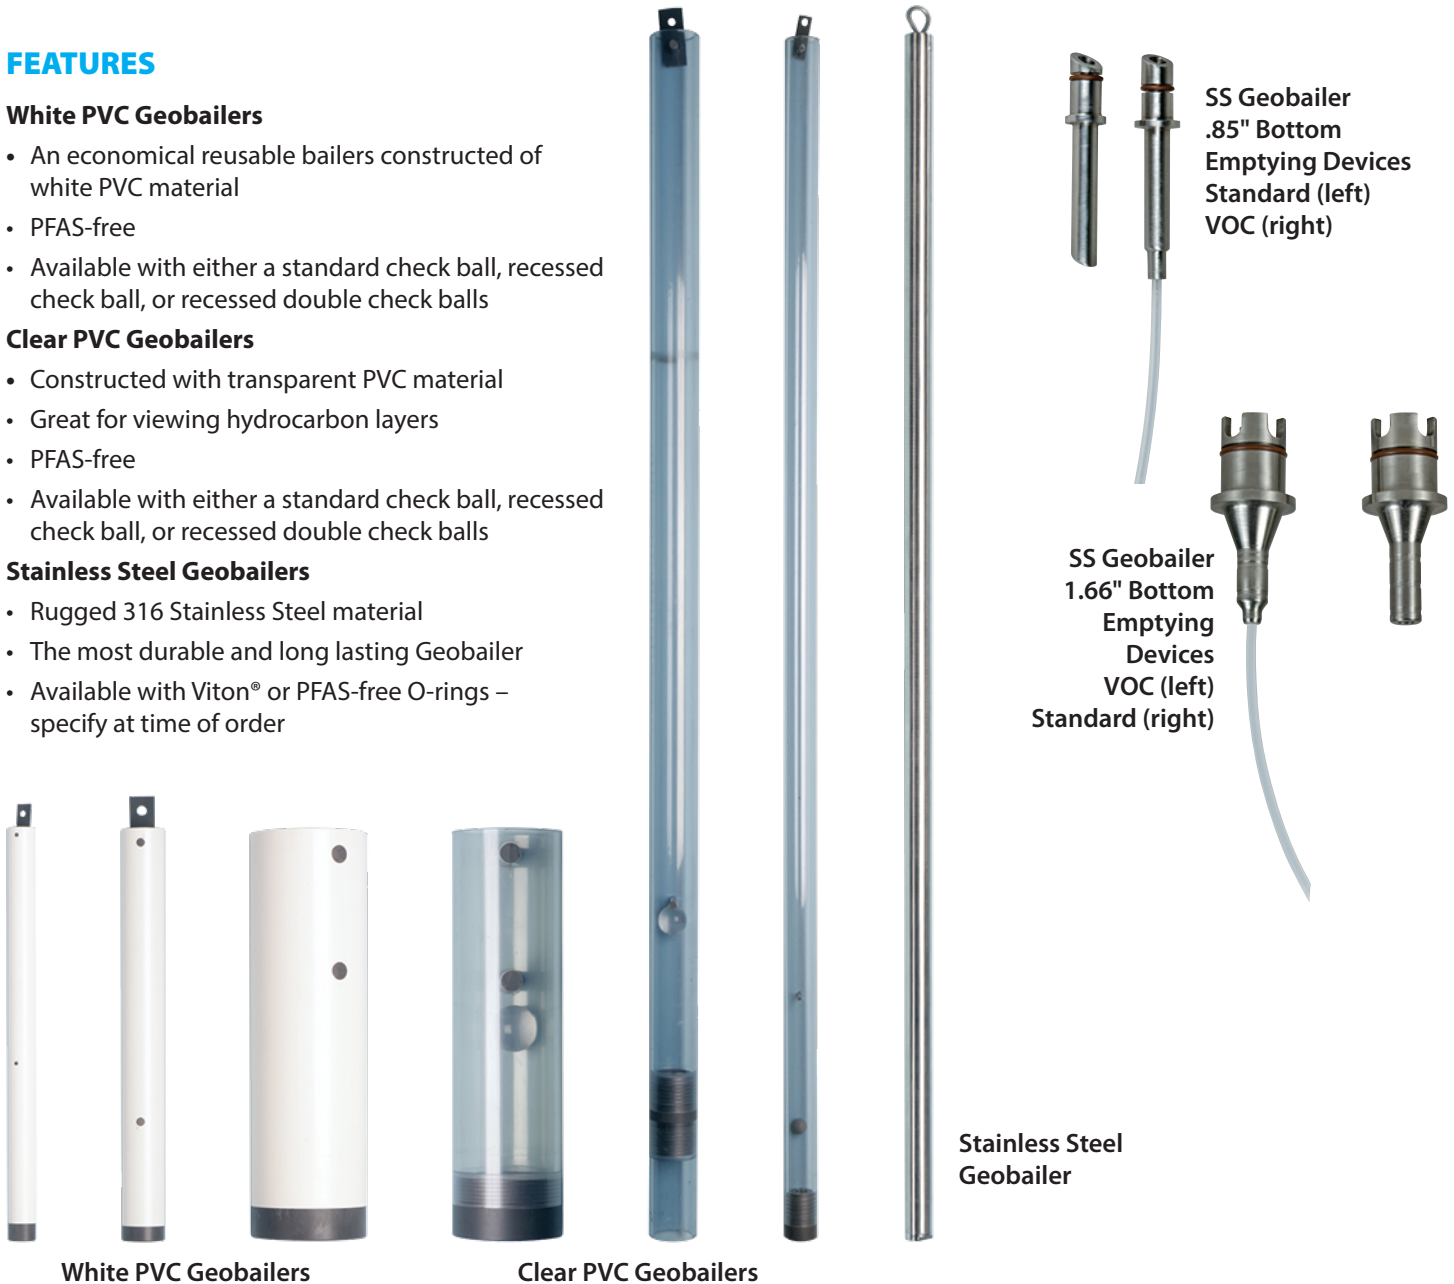

Bailers

Geotech Geobailer Reusable Bailers

SPECIFICATIONS

PVC Geobailers

White, Clear, Recessed Check, Recessed Double Check

	Volume oz. (ml)				
Nominal Length	12" (30.5 cm)	24" (61 cm)	36" (91.4 cm)	48" (121.9 cm)	60" (152.4 cm)
Diameter OD					
0.675" (17.145 mm)	1.2 (34)	2.4 (72)	3.7 (109)	5.0 (147)	6.2 (185)
0.84" (21.336 mm)	1.9 (55)	3.9 (115)	5.9 (174)	7.9 (234)	9.9 (294)
1.66" (42.164 mm)	9.1 (270)	19.1 (564)	29.0 (858)	38.9 (1152)	48.9 (1446)
3.5" (88.90 mm)	45.1 (1333)	94.2 (2786)	143.3 (4240)	192.5 (5694)	241.6 (7148)


316 Stainless Steel Geobailers

	Volume oz. (ml)
Nominal Length	36" (91.4 cm)
Diameter OD	
0.84" (21.336 mm)	7.8 (230)
1.66" (42.164 mm)	36.2 (1070)

Optional Geotech
Electric Rewind
Bailer Cable Reel



BAILING CORD SPECIFICATIONS



Bailing Cord Materials

Sizes

Yellow Nylon	3/16", 1000 ft. roll
White Diamond Braid Nylon	1/8", 1000 ft. roll
White Nylon Twine #15	350 ft. roll
FEP Coated Stainless Steel Safety Cable	1/16" x 3/32", 3/32" x 1/8"

