

Fixed Click Type Torgue Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs



## **Torque Wrenches Technical Data Sheet**

# PE5011-1

### **Features**

- · Designed for continual use
- Will "click" once preset torgue value is achieved

## Applications

- · Attaching test cables in lab environments • Final production attachment
- · Field install and testing applications Applying accurate torque
- Avoiding over torque

Designed to avoid over torque

#### Description

PE5011-1 click type torque wrench, is designed for 1.85mm, 2.4mm, 2.92mm, 3.5mm and SMA connectors, has a 5/16 bit with a preset value of 8 in-lbs. Pasternack's PE5011-XX click type torque wrenches allow accurate mating force when assembling and disassembling a variety of RF coaxial connectors. The unique feature of click type RF wrenches is that once the preset torque value is reached, they will "click" which can be heard and felt, followed by a slight bend at the head, alerting to the user to stop applying torque to the connector. Pasternack's click type 1.85mm, 2.4mm, 2.92mm, 3.5mm and SMA torque wrenches are in-stock and are also available for a wide variety of other RF connectors, all of which ship the same day.

#### Configuration

Torque Type	
Design Type	
Hex Size	
Torque Setting	
Torque Accuracy Percentage	

Size Length Handle Diameter

Weight Handle Color Click Type 5/16 inch 8 in-lbs [0.9 Nm] ±4 %

Fixed

6.8 in [172.72 mm] 0.63 in [16 mm]

0.348 lbs [157.85 g] Blue

#### Compliance Certifications (see product page for current document)

#### Notes:

- · Do not use on damaged connectors.
- To improve performance of a wrench that hasn't been used recently, actuate the wrench by clicking the wrench head back and forth several times before use. This will spread the lubricant through the internal mechanism.
- Click type tools require smooth consistent application of force. Each torguing action should be completed within 2 seconds. Slower or faster torguing action will detract from accuracy.

Fixed Click Type Torque Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Fixed Click Type Torque Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs PE5011-1

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623



Tél. 01 47 95 99 60 Fax. 01 47 01 16 22



e-mail : hyper@es-france.com Site Web : www.es-france.com





# Fixed Click Type Torque Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs

## **Torque Wrenches Technical Data Sheet**

## PE5011-1

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Fixed Click Type Torque Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs PE5011-1

URL: https://www.pasternack.com/preset-torque-wrench-5-16-bit-sma-2.92mm-3.5mm-8in-lbs-pe5011-1-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Tél. 01 47 95 99 60 Fax. 01 47 01 16 22

2

PE5011-1 CAD Drawing

Fixed Click Type Torque Wrench With 5/16 Bit For SMA, 2.92mm, 3.5mm Connectors Pre-set to 8 in-lbs

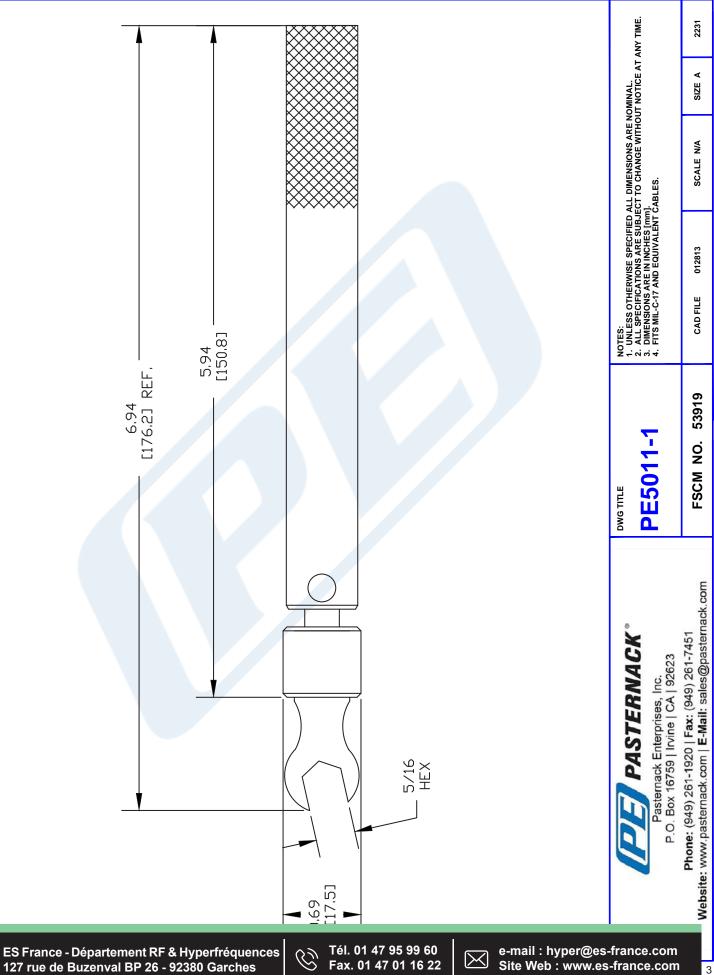

127 rue de Buzenval BP 26 - 92380 Garches

 $\bigcirc$