






.50 [12.7] REF

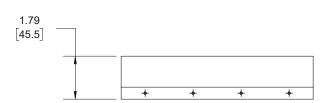

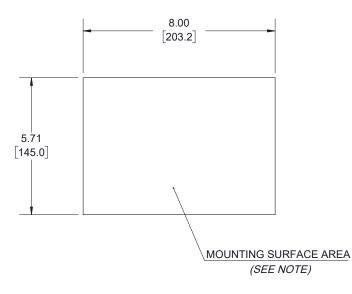

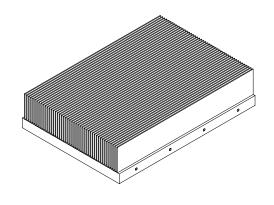

5.53

140 5

## NOTE:

PASTERNACK STRONGLY RECOMMENDS THE USE OF SILICONE THERMAL GREASE OR PASTE TO BE APPLIED UNIFORMLY ACROSS THE ENTIRE BOTTOM SURFACE AREA OF THE AMPLIFIER MODULE. THIS THERMALLY CONDUCTIVE LAYER WILL INSURE NO AIR POCKETS FORM BETWEEN THE METAL TO METAL CONTACT AREA WHEN BOLTED DOWN TO THE HEATSINK SURFACE. THIS HELPS TO OPTIMIZE THE THERMAL CONDUCTIVITY PERFORMANCE OF THE AMPLIFIER MODULE FOR RELIABLE OPERATION.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS TOLERANCES:

.X=± .2 [5.08] **FRACTIONS** .XX=± .01 [.25] ± 1/32 .XXX=± .005 [ .13 ] ANGLES ± 1°

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. THIRD-ANGLE PROJECTION

(⊕



Pasternack Enterprises, Inc. P.O.Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 | 1.866.727.8376 Fax: 1.949.261.7451

www.pasternack.com | e-mail: sales@pasternack.com

1	S
+	
J	

53919

IS THE PROPERTY OF PASTERNACK CORPORATION. ALL RIGHTS RESERVED. SHEET

THE INFORMATION AND

DESIGN IN THIS DOCUMENT

SCALE N/A

SIZE CAGE DRAWN BY PART NUMBER REV PE15C5013 Α KDANG Α