

SENCITY® Rail Antenna

K702021

Properties

- Railway rooftop antenna for 410 to 470 MHz
- Rugged design, meets EN 50155 Railway Standard
- Fire retardant according to EN 45545-2
- Contains a heavy duty fibreglass radome



Electrical bands	
	Band 1
Frequency (MHz)	410 MHz ... 470 MHz
Impedance	50 Ω
VSWR	1.5
Gain (dBi)	4 dBi
Ambient Temperature	25 °C

Electrical remarks	
Remarks	Indicated VSWR values are valid for a metallic ground plane of 0.5M x 0.5M or larger. Indicated Gain dBi values are valid for a metallic ground plane of 1.0M x 1.0M or larger. Gain dBd 0 (ref. to the quarter-wave antenna) on a conductive surface with a minimum size of 0.5 x 0.5M or larger.

Ports	
Port name	Tetra
Connector	N, jack (female)
Polarization	vertical
DC grounded	Yes

Connections	
Port number	
Band 1	<input checked="" type="checkbox"/>



SENCITY® Rail Antenna

K702021

Mechanical data	
Weight	0.5 kg
Dimensions	142 mm x 145 mm x 80 mm (Height x Width x Depth)
Remarks	Radiator and Flange: Aluminum. Radome: Fiberglass, colour: Light grey. All screws and nuts: Stainless steel. Sealing: Neoprene and rubber. This antenna, tested by an independent institute, is DC grounded to protect against lightning and short circuit by high voltage lines. Packaging size (outside): 151 x 87 x 210 mm

Material data	
Radome colour	Grey
Back plate/base plate material	Aluminium
Back plate/base plate colour	Black
Housing material and surface treatment	Black

Environmental data	
Operation temperature	-55 °C ... 85 °C
Storage temperature	-55 °C ... 85 °C
Environment (application)	Outdoor
Ingress protection (IP Rating)	IP66
Flammability rating	EN 45545-2
Standards	Railway EN 50155 Railway EN 45545


Environmental remarks	
Environmental tests: EN 50155:2007 Flammability rating: EN 45545	



SENCITY® Rail Antenna
K702021

Outline drawing

Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Einwilligung weder kopiert, reproduziert, noch Dritten weitergegeben oder in irgendeiner Weise öffentlich gemacht werden. (Art. 12 & a.)
 This drawing is our intellectual property and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the owners.

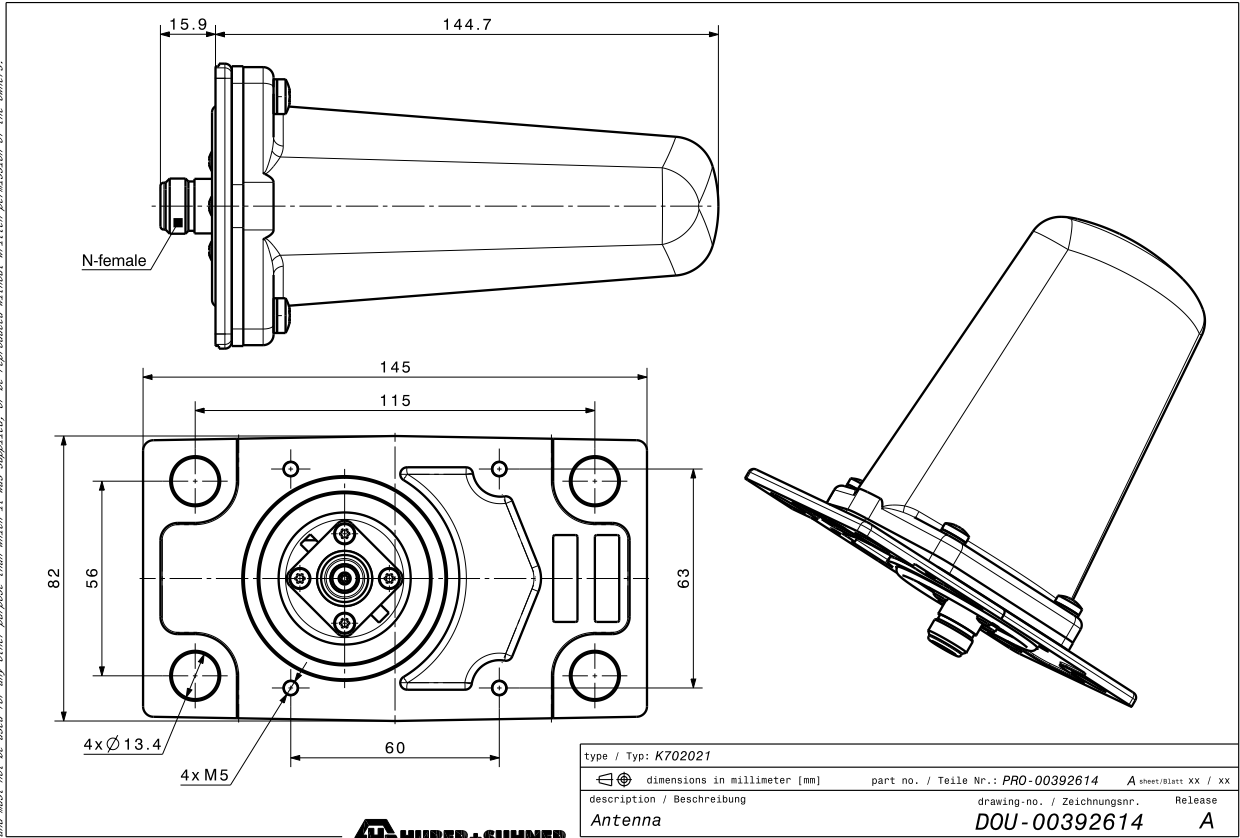

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind. DOCUMENT PIM-P1031 / Date of publication: 31.10.2023 / uncontrolled copy