


R&S®HM8118

LCR-Bridge

Technical Data

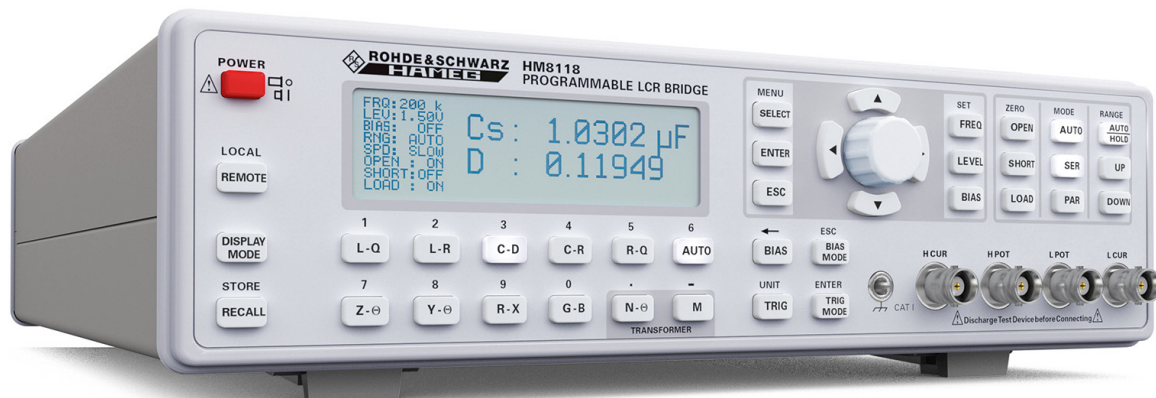

Key facts

- Basic Accuracy 0.05 %
- Measurement Functions L, C, R, |Z|, X, |Y|, G, B, D, Q, θ , Δ , M, N
- Test Frequencies 20 Hz...200 kHz
- Up to 12 Measurements per Second
- Parallel and Serial Mode
- Binning Interface HO118 (optional) for automatic Sorting of Components
- Internal programmable Voltage and Current Bias
- Transformer Parameter Measurement
- External Capacitor Bias up to 40 V
- Kelvin Cable and 4-Terminal SMD Test Adapter included
- Galvanically isolated USB/RS-232 Dual-Interface, optional IEEE-488 (GPIB)



ES France - Département Bio-tests & Industries
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90
Fax. 01 47 01 16 22



e-mail : bio@es-france.com
Site Web : www.es-france.com

Test & Measurement

Technical Data

PD 5210.8689.32 - 03.00

Technical Data

200 kHz LCR-Bridge R&S®HM8118


All data valid at 23°C after 30 minutes warm-up.

Conditions

Test signal voltage	1 V
Open and short corrections performed	
Measurement time	SLOW
Display	
Measurement modes	Auto, L-Q, L-R, C-D, C-R, R-Q, Z- θ , Y- θ , R-X, G-B, N- θ , M
Equivalent circuits	auto, series or parallel
Parameters displayed	Value, deviation or % deviation
Averaging	2 to 99 measurements

Accuracy

Primary parameters	Basic accuracy (Test voltage: 1.0V, measurement SLOW/MEDIUM, autoranging mode, constant voltage OFF, bias off). For FAST mode double the basic accuracy values
--------------------	---

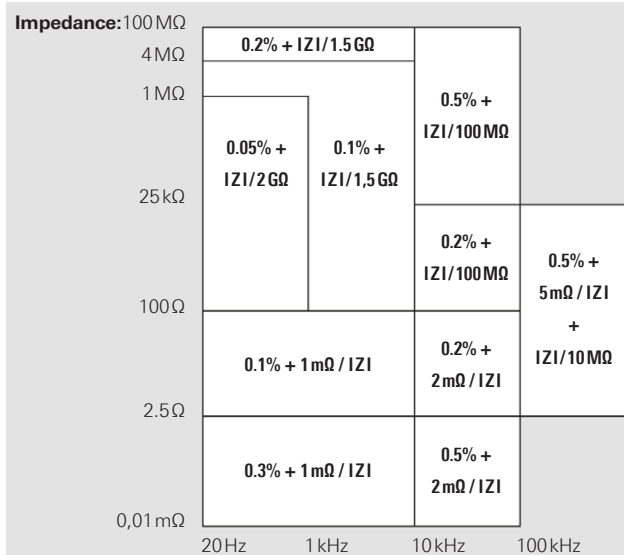

Secondary parameters

Basic accuracy D, Q	$\pm 0,0001$ if $f = 1 \text{ kHz}$
Phase angle	$\pm 0,005^\circ$ if $f = 1 \text{ kHz}$

Ranges

Z , R, X	0,01 m Ω to 100 M Ω
Y , G, B	10 nS to 1.000 S
C	0,01 pF to 100 mF
L	10 nH to 100 kH
D	0,0001 to 9,9999
Q	0,1 to 9.999,9
θ	-180° to +180°
Δ	-999,99 to 999,99%
M	1 μH to 100 H
N	0,95 to 500

Measurement conditions and functions

Test frequency	20 Hz to 200 kHz (69 steps)
Frequency accuracy	$\pm 100 \text{ ppm}$
AC test signal level	50 mV _{rms} to 1.5 V _{rms}
Resolution	10 mV _{rms}

Drive level accuracy	$\pm(5\% + 5 \text{ mV})$
Internal bias voltage	0 V _{DC} to +5,00 V _{DC}
Resolution	10 mV
External bias voltage	0 V _{DC} to +40 V _{DC} (fused 0.5 A)
Internal bias current	0 mA to +200 mA
Resolution	1 mA
Range selection	Auto and Hold
Trigger	Continuous, manual or external via interface, binning interface or trigger input
Trigger delay time	0 ms to 999 ms in 1 ms steps
Measurement time (f $\geq 1 \text{ kHz}$)	
FAST	70 ms
MEDIUM	125 ms
SLOW	0.7 s
Miscellaneous	
Test signal level monitor	Voltage, current
Error correction	Open, short, load
Save/Recall	9 instrument settings
Front-end protection	$V_{\text{max}} < \sqrt{2/C}$ @ $V_{\text{max}} < 200 \text{ V}$, C in Farads (1 Joule of stored energy)
Low potential and low current guarding	Ground, driven guard or auto (fused)
Constant voltage mode (25 Ω source)	
Temperature effects R, L or C	$\pm 5 \text{ ppm}/^\circ\text{C}$
Interface	Dual interface USB/RS-232 (R&S®HO820), optional R&S®HO880 IEEE-488 (GPIB)
Safety	Safety class I (EN61010-1)
Power supply	110 V to 230 V $\pm 10\%$, 50 to 60 Hz, CAT II
Power consumption	approx. 20 W
Operating temperature	+5°C to +40°C
Storage temperature	-20°C to +70°C
Rel. humidity	5% to 80% (non condensing)
Dimensions (W x H x D)	285 x 75 x 365 mm
Weight	approx. 4 kg

Accessories supplied: Line cord, operating manual, R&S®HZ184 4-terminal kelvin test cable, R&S®HZ188 4-terminal SMD component test fixture

Recommended accessories:

R&S®HO118	Binning interface
R&S®HO880	Interface IEEE-488 (GPIB), galvanically isolated
R&S®HZ42	19" rackmount kit 2RU
R&S®HZ72	GPIB-cable 2 m
R&S®HZ181	4-terminal test fixture including shorting plate
R&S®HZ186	4-terminal transformer test cable

