

Single Kernel Grain Moisture Tester  
Model PQ-520 (type PQ-5205)

*Determining overall  
moisture distribution.*



# Single Kernel Grain Moisture Tester PQ-520

The PQ-520 Single Kernel Grain Moisture Tester provides fast and continuous measurement of moisture, one kernel at a time. It is possible to accurately determine the moisture distribution of a large sample by using this method of measurement, thus determining the appropriate time for threshing, controlling the average moisture of a received sample, and preventing uneven moisture content during drying.

The measurement operation is simple. The sample is poured into the large sample port, and then the "start/stop" key is pressed. After completion of the measurement, the average moisture value is automatically displayed. Moisture distribution may also be displayed with a one-click operation.

Determining the overall moisture distribution, one kernel at a time, is a simple and reliable method that plays an important role in improving the consistency of grain quality.

## • Easy to Read Screen; Easily Understood Histogram

A high visibility fluorescent display lamp is used for the screen. The average moisture value is displayed after the measurement, and it is possible to also display the histogram indicating moisture distribution. Use of the histogram display makes it possible to intuitively understand the moisture distribution of the entire sample and, in turn, readily detect uneven drying.



## • Simple Maintenance

Since a large-volume sample case is used for disposal after measurement, there is no need for sample disposal after each test. When the sample feed unit becomes clogged, the side door may be opened for easy cleaning.



Large Sample Case



Side Door for Cleaning

## • Record Management

The measurement date, moisture content data, standard deviation, and histogram may be printed using the optional printer. PC-based data management is also possible by use of data logger software.



VZ-380 Printer (Optional)

## • Specification : type PQ-520S


Mea. Method	Electrical Resistance			
Measurement Range	Long milled rice	11-20%	Jasmine milled rice	11-20%
	Short milled rice	11-20%	Jasmine paddy	11-35%
	Long brown rice	11-20%	Barley	10-40%
	Short brown rice	11-20%	Naked barley	10-35%
	Long Paddy	11-35%	Wheat	10-40%
	Short Paddy	11-35%	Long sticky paddy	11-35%
	Long parboiled rice	11-20%	Long sticky milled rice	11-20%
Measurement Time	Less than 40 seconds / 100 kernels (during measurement of brown rice, average moisture value display time)			
Precision	± 0.5% (moisture less than or equal to 20%)			
Statistical Calc.	Average, Standard deviation (printout mode)			
Display	Fluorescent tube display			
Display Content	Selected grain type, average moisture value, kernel count, time, moisture distribution			
Temperature Correction	Automatic instrument temperature correction using a thermostat			
Kernel Count	10-1000 (Selectable)			
Operating Range	5-40°C, Less than 85%RH (non-condensing)			
Output	RS-232C interface (for printer), USB (for PC)			
Power Source	AC100-120 / 200-240V (50/60Hz)			
Usage	76W Maximum			
Dim. / Weight	320(W) × 254(D) × 382(H)mm / 9.0kg			
Accessories	Scoop, Tweezers, Electrical power cord			
Options	Printer VZ-380 (w/ VZC69 cable) for RS-232C, Data logger software PDL-01 (w/ USB cable)			

```

=====
PQ520                               Ver 1.3
TIME                                : 13:45
DATE                                : 21/05/18

GRAIN                               : CH9  L. PADDY
NUMBER OF KERNELS                   : 20   PCS.
AVERAGE                             : 11.1 %
STANDARD DEVIATION                  : 0.61
TEMP.                                : 26.2 °C
=====

```

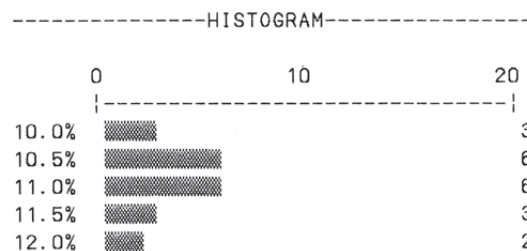

Printing example



## KETT ELECTRIC LABORATORY

1-8-1 Minami-Magome, Ota-ku, Tokyo 143-8507, JAPAN

☎ +81-3-3776-1121 ☎ +81-3-3772-3001

🌐 <http://www.kett.co.jp/> ✉ [overseas@kett.co.jp](mailto:overseas@kett.co.jp)

Management system enhancement department of the Japanese Standards Association (JSA) registers the Quality Management System of the above organization, with conform to JIS Q 9001, ISO 9001.

The scope of the registration.

Design, development and production management, calibration and repair

Contact



ES France - Département Bio-tests & Industries  
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90  
Fax. 01 47 01 16 22



e-mail : [bio@es-france.com](mailto:bio@es-france.com)  
Site Web : [www.es-france.com](http://www.es-france.com)