

PA 2522 set

Preamplifier 10 MHz up to 22 GHz

LANGER
EMV-Technik



Short description

The PA 2522 preamplifier was designed for the amplification of measuring signals, e.g. weak signals of near-field probes with high resolution. The PA 2522 is to be used with the 50 ohm input of a spectrum analyzer or an oscilloscope and is powered by the plug-in power supply. With the correct cable a near-field probe can be connected to the input of the preamplifier. Input and output of the PA 2522 are SMA connectors.

Scope of delivery

- 1x PA 2522, Preamplifier 10 MHz up to 22 GHz
- 1x NT FRI EU, Power Supply Unit
- 1x Case 5, System Case Near-Field Probes

Technical parameters

Frequency range	10 MHz - 22 GHz
Gain	25 dB
Weight	400 g




PA 2522 set

Preamplifier 10 MHz up to 22 GHz

LANGER
EMV-Technik

Measurement set-up with PA 2522

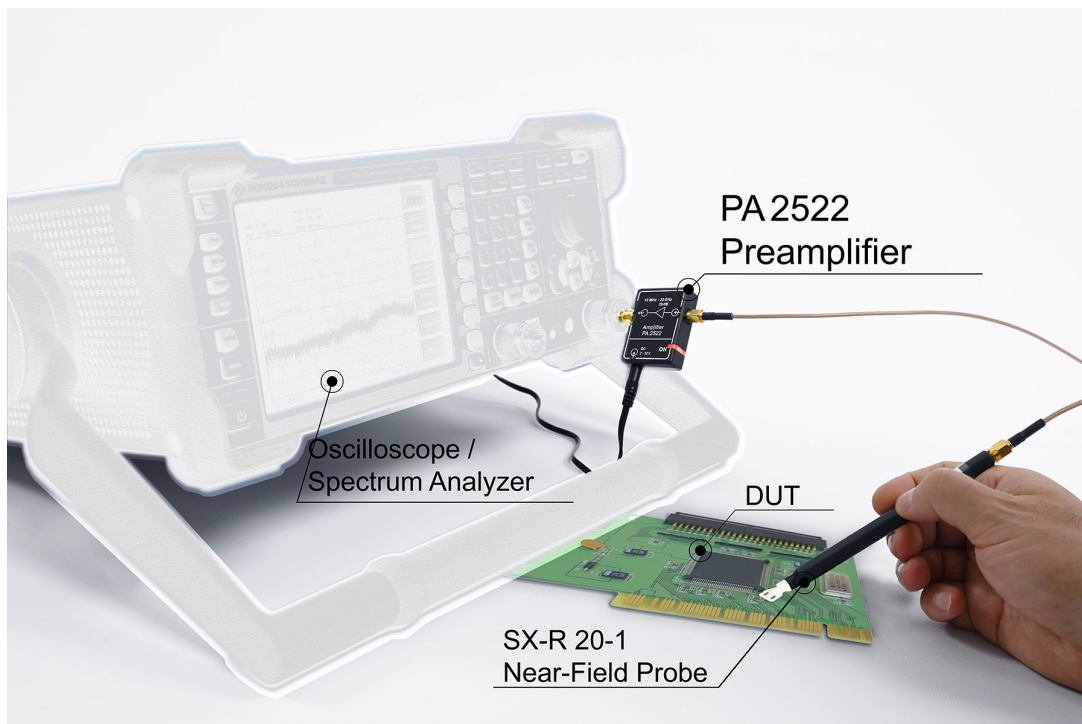

Scope of Delivery



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com