

ICR HH150-6 set

Near-Field Microprobe 2.5 MHz - 6 GHz

LANGER
EMV-Technik



Short description

The near-field microprobe is designed for a high-resolution measurement of magnetic near fields. With the ICR H probe the following measurements can be performed:

- Surface Scan via IC according to IEC 61967-3
- Volumenscan via IC
- Pin Scan

The measuring coil at the ICR RF probe head is horizontally aligned to the measurement surface.

A preamplifier is integrated into the probe housing and powered by the Bias-Tee.

The ICR near-field probes undergo a quality check before they are delivered. Different reference setup measurements are performed and resulting correction lines are generated. Two different correction lines are determined – a standardized correction line and an H-field correction line.

Attention: Due to its construction, the ICR probe is sensitive to shock and comes with a protective cap for transport and handling.

Scope of delivery

- 1x ICR HH150-6, Near-Field Microprobe 2.5 MHz to 6 GHz
- 1x BT 706, Bias Tee for Langer probes
- 1x SMA-SMA RA, Cable SMA-SMA, right angle
- 1x ICR-C, ICR Certificate
- 1x ICR Corr, Correction Curves ICR / USB
- 1x NT FRI EU, Power Supply Unit
- 1x ICR case1, System Case

Technical parameters

Frequency range	2.5 MHz ... 6 GHz
Resolution	100 µm
Internal diameter	150 µm



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 45
Fax. 01 47 01 16 22




e-mail : tem@es-france.com
Site Web : www.es-france.com

Frequency response

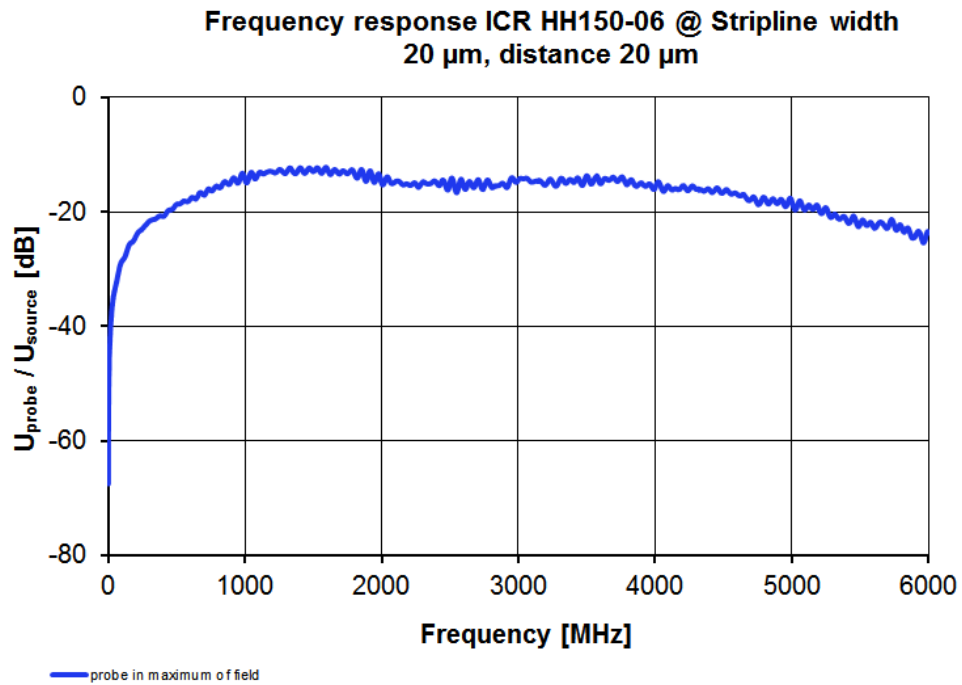


Measuring principles

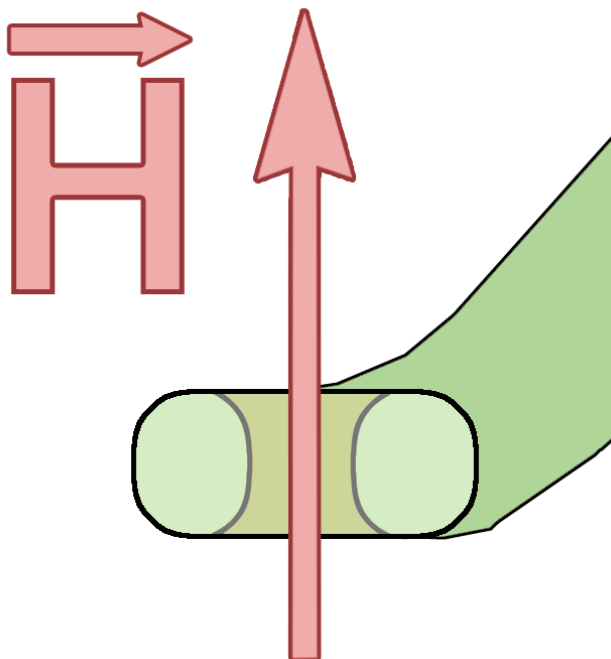


Design, view 1

Stripline

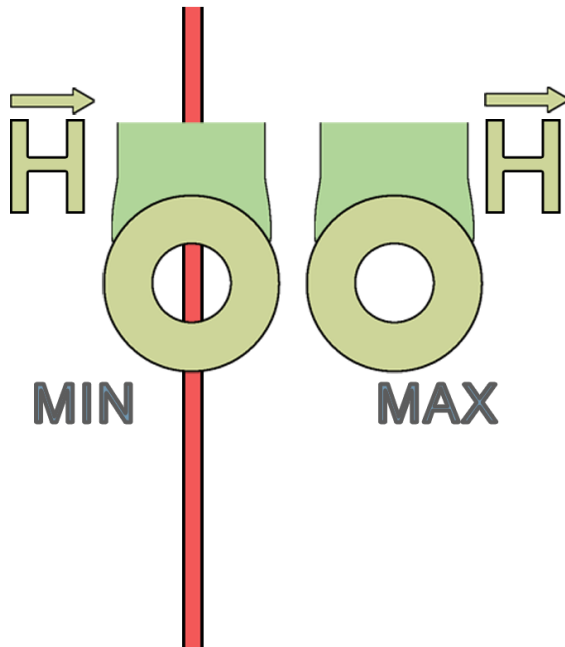

Design, view 2

Stripline

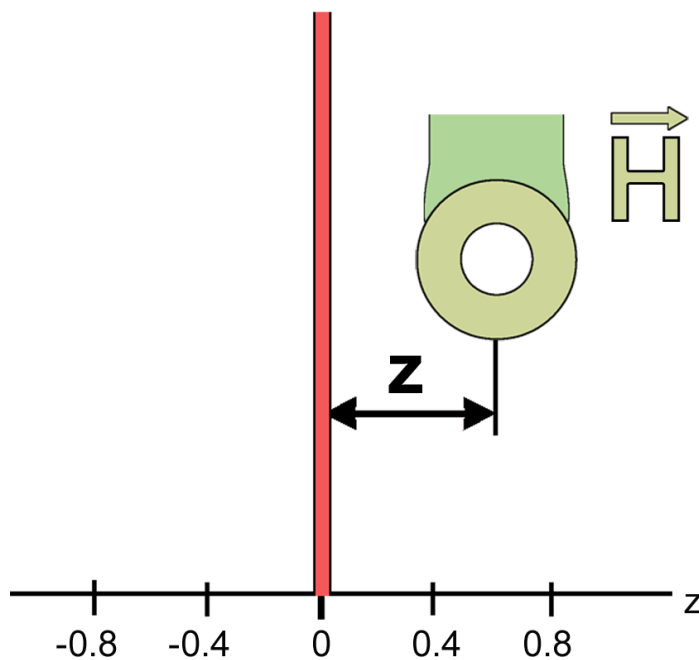


ICR HH150-6 set

Near-Field Microprobe 2.5 MHz - 6 GHz

LANGER
EMV-Technik

Transverse profile

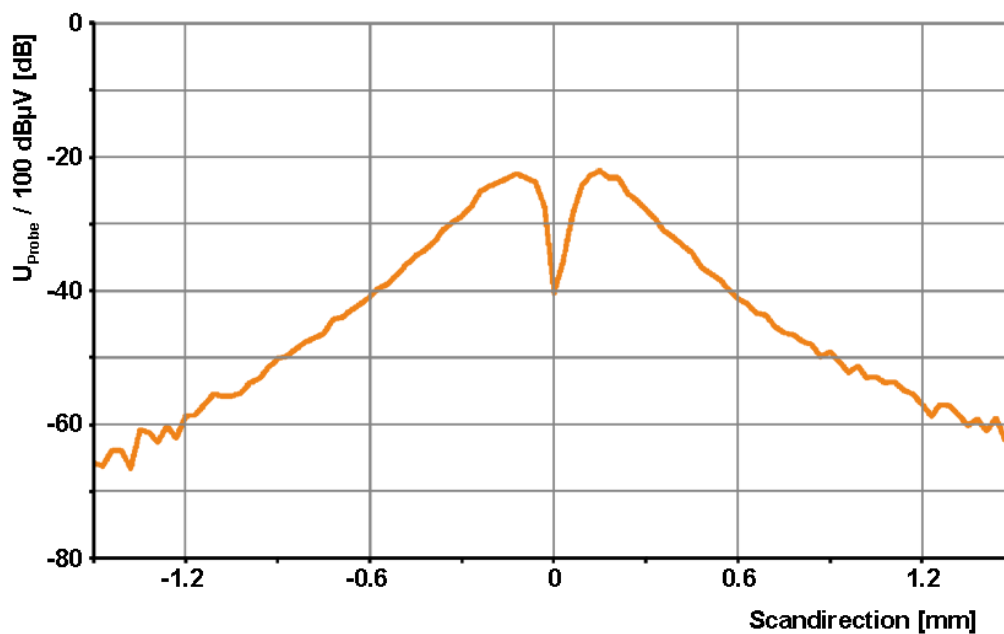

ICR HH150-6




ICR HH150-6 set

Near-Field Microprobe 2.5 MHz - 6 GHz

LANGER
EMV-Technik

BT 706 bias tee

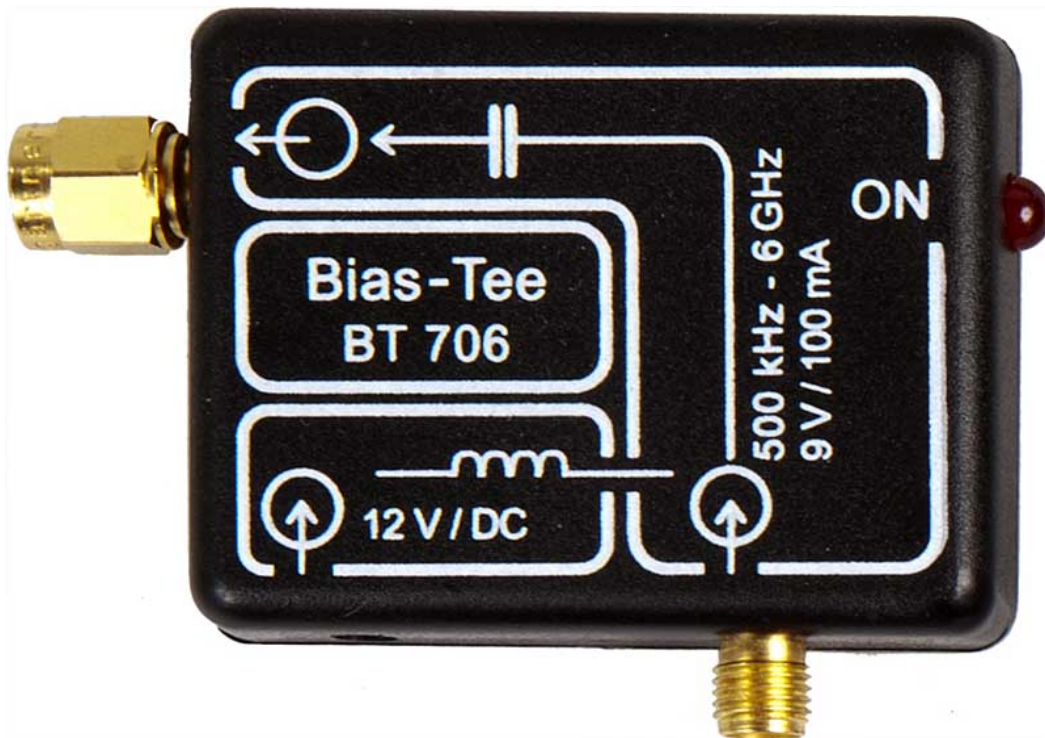

Scope of delivery

