



Features

- 450V 30A Contact switching capability
- High working temperature 125°C
- U type and H type are available
- Flange and iron bracket type are available
- Satisfy RoHS

Product Parameter

Characteristic	Items		Explanation		Characteristic	Items		Explanation		
Contact Parameter	Contact Type		Single NO Type		Performance Parameter	Mechanical Endurance		1,000,000 cycles		
	Nominal Load		30A (@450V)			Initial Dielectric Strength	IP/OP	2000VAC 1min.		
	Max. Persistent Current		80A (@80V)				OP/OP	2000VAC 1min.		
	Dropping Voltage Of Contacts		≤200mV(@10A)			Initial Insulation Resistance		100MΩ (500VDC)		
	Min.Applicable Load		1A 12VDC			Pick-up Time (Nominal Voltage)		≤10ms		
	Terminal Type		Plug Type Terminal(ISO)			Drop-out Time		≤10ms		
Eletrical Parameter (1)			U Type	H Type		Shock	Stability Test	294m/s² (30G)		
	Max.Switching Voltage		80VDC	450VDC				Strength Test	490m/s² (50G)	
	Max.Breaking Current		20A (80VDC,more than once)	50A (450VDC,more than once)			Vibration		22.3~500Hz 98m/s² (10G)	
	Electric Endurance	Res. Load	100,000 cycles (80VDC 10A)	100,000 cycles (450VDC 20A)			Ambient Temperature		-40℃~85℃	
				20,000 cycles (450VDC 30A)			Ambient Humidity		20%~85%RH	
				8,000 cycles (80VDC 80A)			Weight		47g	
							Length×Width×Height(mm)		43×32.6×37.2	

Coil Parameter (at 23°C)

Nominal Voltage (VDC)	12	24
Operating Voltage (VDC)	12	24
Max. Voltage (VDC)	16	36
Pick-up Voltage (VDC)	≤7.2	≤14.4
Drop-out Voltage (VDC)	≥1.2	≥2.4
Coil Resistance (±10%) (Ω)	90	360
Initial Power (W)	1.6	1.6
Steady Power (W)	1.6	1.6

Notes :


(1)Unless specified otherwise in the individual methods, the ambient temperature of the electric endurance test is 23°C,duty factor is 2s:2s.




Ordering Information

SARJ	-S	-1	12	D	U	P	G	H	-XX	Special Parameter:Nil-Standard type, 01-terminal without hole.
										Accessory Form:Nil-Ordinary type, H-With face up magnet, HC-With face down magnet.
										Mounting Type:Nil-without bracket,G-with Flange, F-with iron bracket.
										Terminal Form: Nil-Plug type terminal, P-PCB type terminal.
										Contact Form : U-Form U
										Coil Power : D-1.6W
										Coil Voltage(VDC) : 12 , 24
										Number of Poles : 1-1 Pole
										Protective Construction:Nil-Dustproof , S-Fluxproof
										Type Designation : SARJ


Outline Dimensions

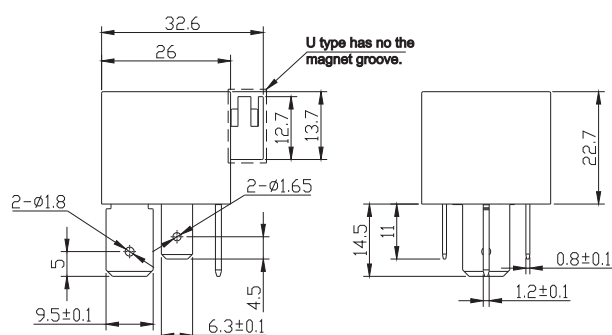



Ordinary Type

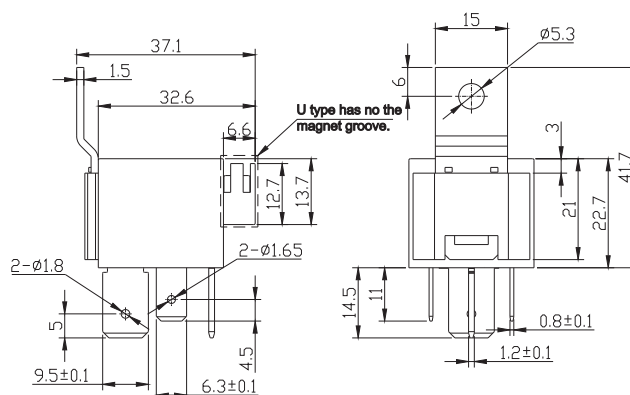

Iron Bracket Type

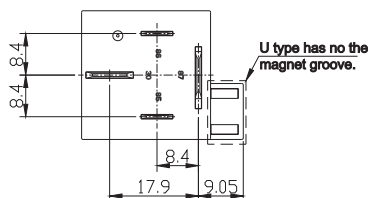


PCB Type

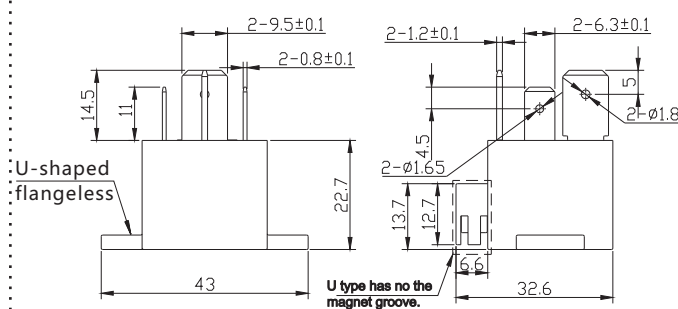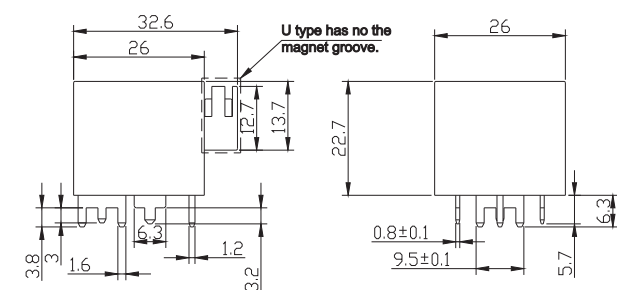Flange Type
(Only H Type)


Unless otherwise specified:
 If dimension $\leq 10\text{mm}$, tolerance: $\pm 0.3\text{mm}$;
 If dimension $10 \sim 50\text{mm}$, tolerance: $\pm 0.5\text{mm}$;
 If dimension $\geq 50\text{mm}$, tolerance: $\pm 0.8\text{mm}$.



Schematic Diagram

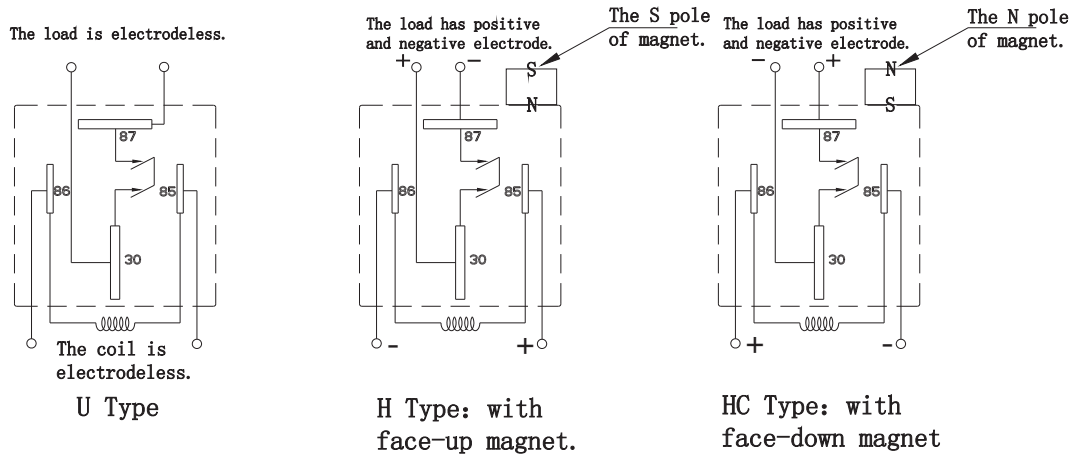

Mounting Dimension

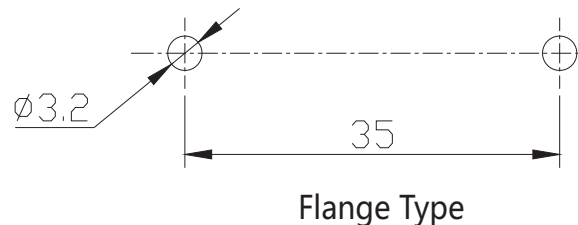

Instruction

1. Use and transport conditions.

- 1) Temperature : -40°C~+85°C
- 2) Humidity : 20~85%RH

2. Please regard the relay as a product within a service life. Don't exceed

its capacity of the switch and service life. Please change in time as necessary.

3. The load output of the relay has positive and negative electrode, please refer the Wiring Diagram to connect it.

4. Be careful and don't stain the connection part of contact with foreign bodies and oil, it may lead to abnormal heat dissipation. Please use the connecting bus with nominal sectional area (100mm² min).

5. Please avoid applying to the terminal with excessive load, if the load of nominal range is exceeded, it will affect the function of switch .

Disclaimer :

This datasheet is the customers' reference. All the specification are subject to change without notice.

We could not evaluate all the performance and parameters for every possible application. Thus the users should be in a right position to choose the suitable product for their own application. If there is any query, please contact Sanyou for technical service. However it is the users' responsibility to determine which product should be used only.

© Sanyou Corporation Limited. All rights of Sanyou to reserved

