



Miniature Power Relay

SLG

Features

- Miniature relay with high switching capability : 40A.
- Contact form : Form A or Form C.
- Special type of 4000VAC dielectric strength and 6000V surge voltage (1.2/50μS) between coil and contact available.
- IEC60335-1 compliance product is available.

Safety certificate

UL、cUL (File No.) : E190598

TUV (File No.) : R50143450

CQC (File No.) :

CQC02001002109、CQC10002050461、CQC21002306488

Contact Data

Type	SLG
Rated load (Resistive load)	40A 250VAC
Max. switching current	40A
Max. switching voltage	277VAC
Max. switching power	11080VA

Characteristics

Contact material	Silver alloy	
Contact resistance	100mΩ Max. (1A 24VDC)	
Operate time (at rated coil voltage)	15ms Max. (No diode)	
Release time	10ms Max. (No diode)	
Insulation resistance	Min. 1,000MΩ (at 500VDC)	
Dielectric strength	Between open contacts :	1,500VAC , 50/60Hz for 1min.
	Between coil and contact:	2,500VAC , 50/60Hz for 1min.(4KV available)
Vibration resistance	Destructive	10 ~ 55Hz, at double amplitude of 1.5mm.
	Function	10 ~ 55Hz, at double amplitude of 1.5mm.
Shock resistance	Destructive	100G Min.
	Function	10G Min.
Endurance	Mechanical endurance(at 10,800ops./h)	10,000,000 cycles(at room temperature)
	Electrical endurance(at 360 ops./h)	30,000 cycles(at room temperature)
Ambient temperature	-40°C ~ +75°C (No condensation)	
Weight	Approx.24.0g	



Coil Data (at 20°C)

Nominal voltage (VDC)	Nominal operating current $\pm 10\%$ (mA)	Coil resistance $\pm 10\%$ (Ω)	Max. allowable voltage	Operate voltage (Max.)	Release voltage (Min.)	Nominal operating power
5	180.00	27	130% of nominal voltage	75% of nominal voltage	5% of nominal voltage	0.9W
6	150.00	40				
9	100.00	90				
12	75.00	160				
15	60.00	250				
18	50.00	360				
24	37.50	640				
48	18.75	2,560				
110	8.20	13,400				

The data shown above are initial values. Do not apply maximum allowable voltage on coil for more than 10 minutes to avoid overheating of the coil.

Safety Certificate Ratings (More details of approved ratings, please refer to the safety certificates)

Certificates	CQC	UL/cUL	TUV
File No	CQC02001002109 CQC10002050461 CQC21002306488	E190598	R50143450
Approved ratings	40A 125VAC/250VAC/277VAC	40A 125VAC/250VAC/277VAC Resistive & General Use	40A 125VAC/250VAC/277VAC

(1) All values unspecified are at room temperature

(2) Only typical ratings are listed above and the endurance differ in each load. Other specific load information are available upon request.



(3) For sealed type testing, please open the ventilation hole in the case before test.

Ordering Information**Nomenclature**


SLG	-S	-1	12	D	M	-F	-XX	Special Parameter : Nil-Standard type, Letter or number-Special requirement
								Insulation System : Nil-Class F , F - Class F
								Contact material : Nil-AgSnO2
								Contact Form : Nil-Form C , M-Form A
								Coil power : D-0.9W
								Rated coil voltage(VDC) : 05 , 06 , 09 , 12 , 15 , 18 , 24 , 48 , 110
								Number of poles : 1-1 Pole
								Protective Construction : S-Flux proofed SH-Sealed type washable SS-Sealed type unwashable
								Type : SLG



Outline dimension, wiring diagram, PCB layout (Unit: mm)

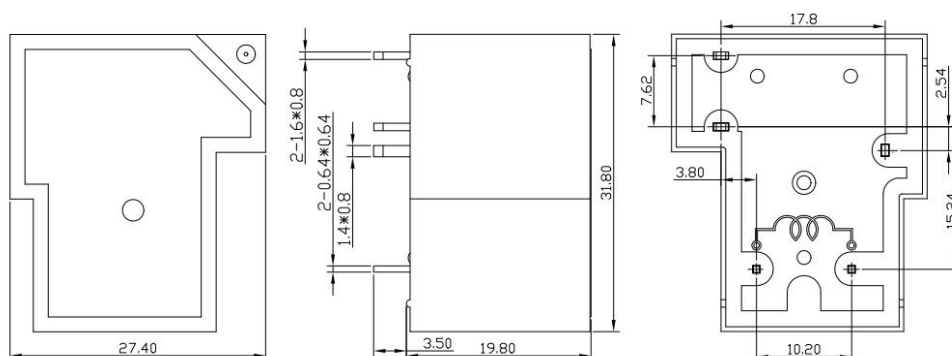


1c




1a

Wiring Diagram



1c

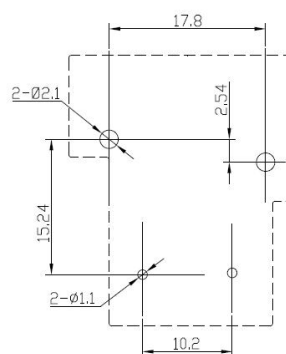

1a

P.C.B Layout (bottom view)

In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance : ± 0.2 mm

If dimension 1~5mm, tolerance : ± 0.3 mm

If dimension > 5mm, tolerance : ± 0.4 mm

Note :

1. The dimension of pin is the size before tinning



2.Tolerance of PCB layout : ± 0.1 mm.



Typical Applications

•Car •UPS •Charging Pile

Characteristic Curves

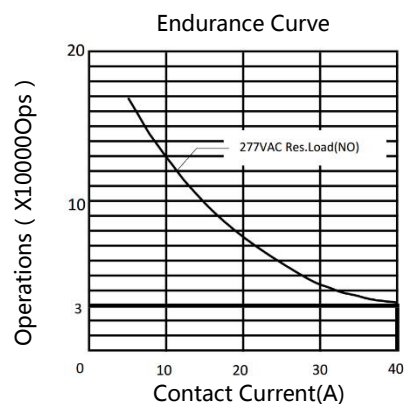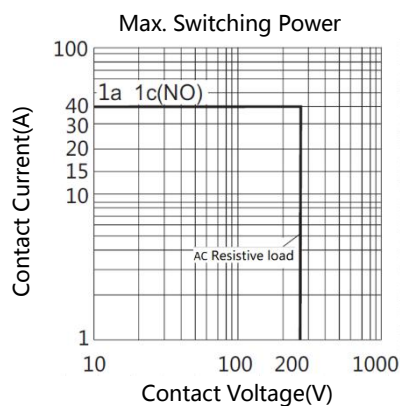


Note :

- (1) Test conditions: room temperature, flux-proof product, resistive load, 1s on, 9s off.
- (2) The above curves are for reference only, and the final result is subject to the experiment.

Note :

If you choose the sealed type , before using, please remove the convex platform at the top of the case to ensure the normal performance of the relay after the completion of a PCB operations. they are as shown in the following diagram :

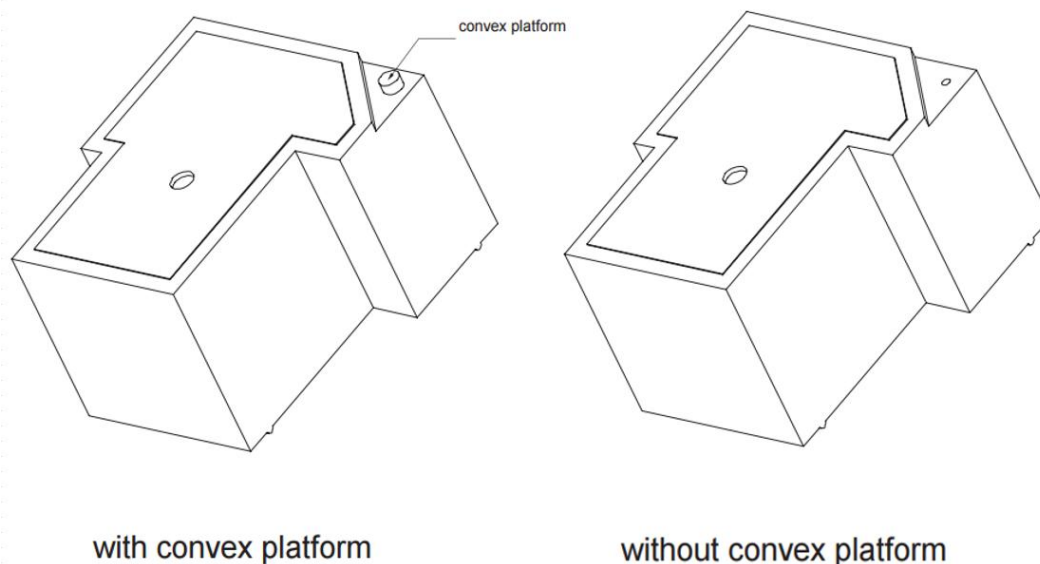

Disclaimer:

This datasheet is the customers' reference. All the specification are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used.

