




Raspberry Pi 3 Model B+

Published November 2023

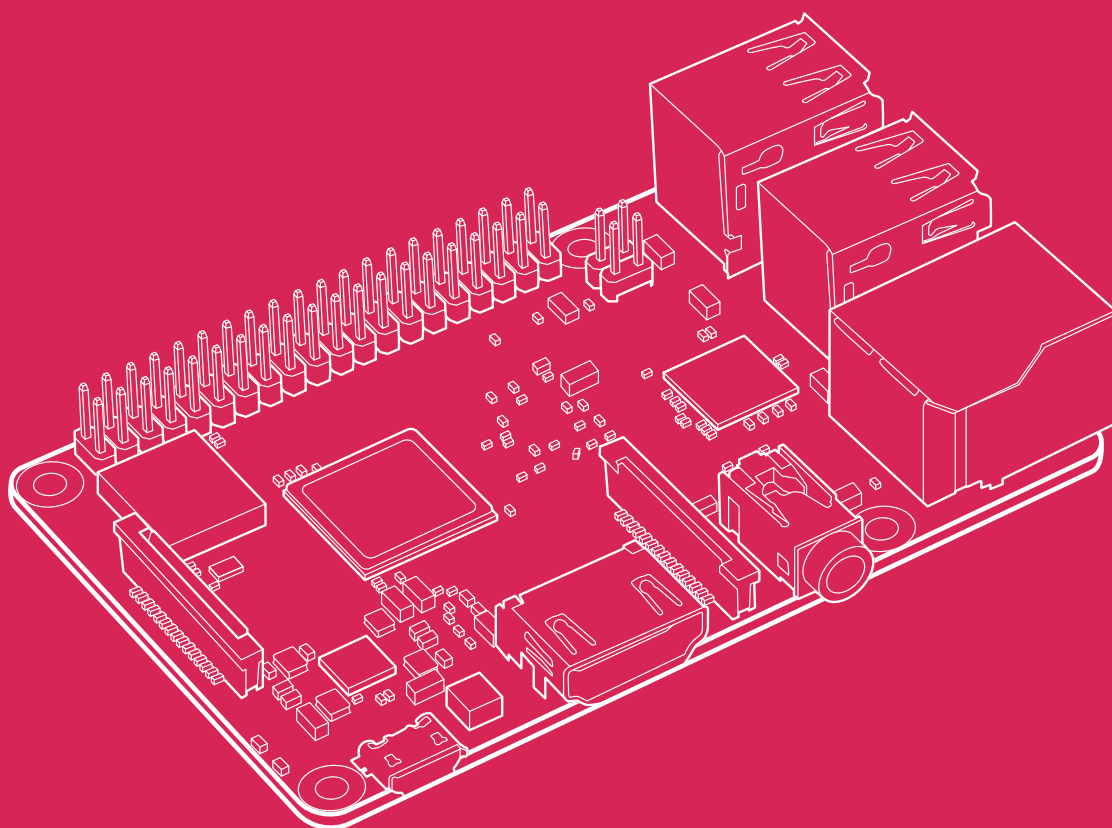

HDMITM
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Raspberry Pi Ltd



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

Overview

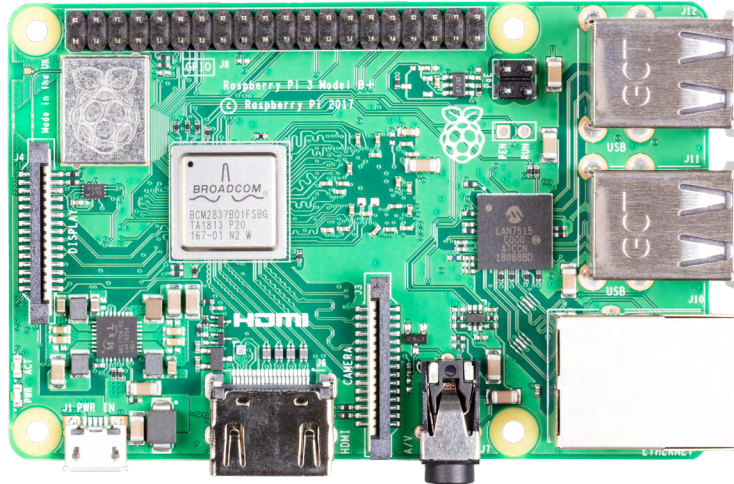

Raspberry Pi 3 Model B+ has a 64-bit quad-core processor running at 1.4GHz, dual-band 2.4GHz and 5GHz wireless LAN, Bluetooth 4.2/BLE, Gigabit Ethernet over USB 2.0, and PoE capability via a separate PoE HAT. The dual-band wireless LAN comes with modular compliance certification.

Raspberry Pi 3 Model B+ maintains the same mechanical footprint as both Raspberry Pi 2 Model B and Raspberry Pi 3 Model B.




Specification

Processor:	Broadcom BCM2837B0, Cortex-A53 64-bit SoC @ 1.4GHz
Memory:	1GB
Connectivity:	• 2.4 GHz and 5 GHz IEEE 802.11b/g/n/ac wireless LAN, Bluetooth 4.2, BLE • Gigabit Ethernet over USB 2.0 (maximum throughput 300Mbps) • 4 × USB 2.0 interface
Video and sound:	• 1 x full size HDMI • MIPI DSI display port • MIPI CSI camera port • 4 pole stereo output and composite video port
Multimedia:	H.264, MPEG-4 decode (1080p30); H.264 encode (1080p30); OpenGL ES 1.1, 2.0 graphics
SD card support:	Micro SD format for loading operating system and data storage
Input Power:	• 5V/2.5A DC via micro USB connector • 5V DC via GPIO header • Power over Ethernet (PoE)-enabled (requires separate PoE HAT)
Operating temperature:	0-50°C
Production lifetime:	Raspberry Pi 3 Model B+ will remain in production until at least January 2028
Compliance:	For a full list of local and regional product approvals, please visit pip.raspberrypi.com



Physical specification

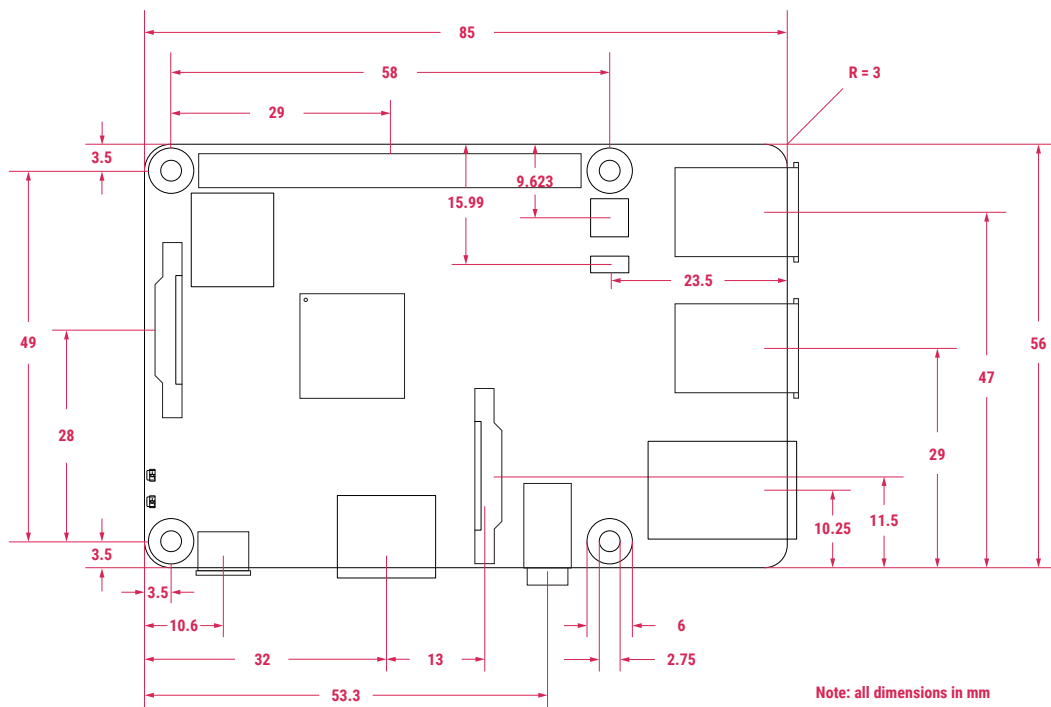


WARNINGS

- This product should only be connected to an external power supply rated at 5V/2.5 A DC. Any external power supply used with Raspberry Pi 3 Model B+ shall comply with relevant regulations and standards applicable in the country of intended use.
- This product should be operated in a well-ventilated environment, and if used inside a case, the case should not be covered.
- Whilst in use, this product should be placed on a stable, flat, non-conductive surface, and should not be contacted by conductive items.
- The connection of incompatible devices to the GPIO connection may affect compliance, result in damage to the unit, and invalidate the warranty.
- All peripherals used with this product should comply with relevant standards for the country of use and be marked accordingly to ensure that safety and performance requirements are met. These articles include but are not limited to keyboards, monitors, and mice when used in conjunction with the Raspberry Pi.
- The cables and connectors of all peripherals used with this product must have adequate insulation so that relevant safety requirements are met.

SAFETY INSTRUCTIONS

To avoid malfunction or damage to this product, please observe the following:

- Do not expose to water or moisture, or place on a conductive surface whilst in operation.
- Do not expose to heat from any source; Raspberry Pi 3 Model B+ is designed for reliable operation at normal ambient temperatures.
- Do not expose the printed circuit board to high-intensity light sources (e.g. xenon flash or laser) whilst in operation.
- Take care whilst handling to avoid mechanical or electrical damage to the printed circuit board and connectors.
- Whilst it is powered, avoid handling the printed circuit board, or only handle it by the edges to minimise the risk of electrostatic discharge damage.

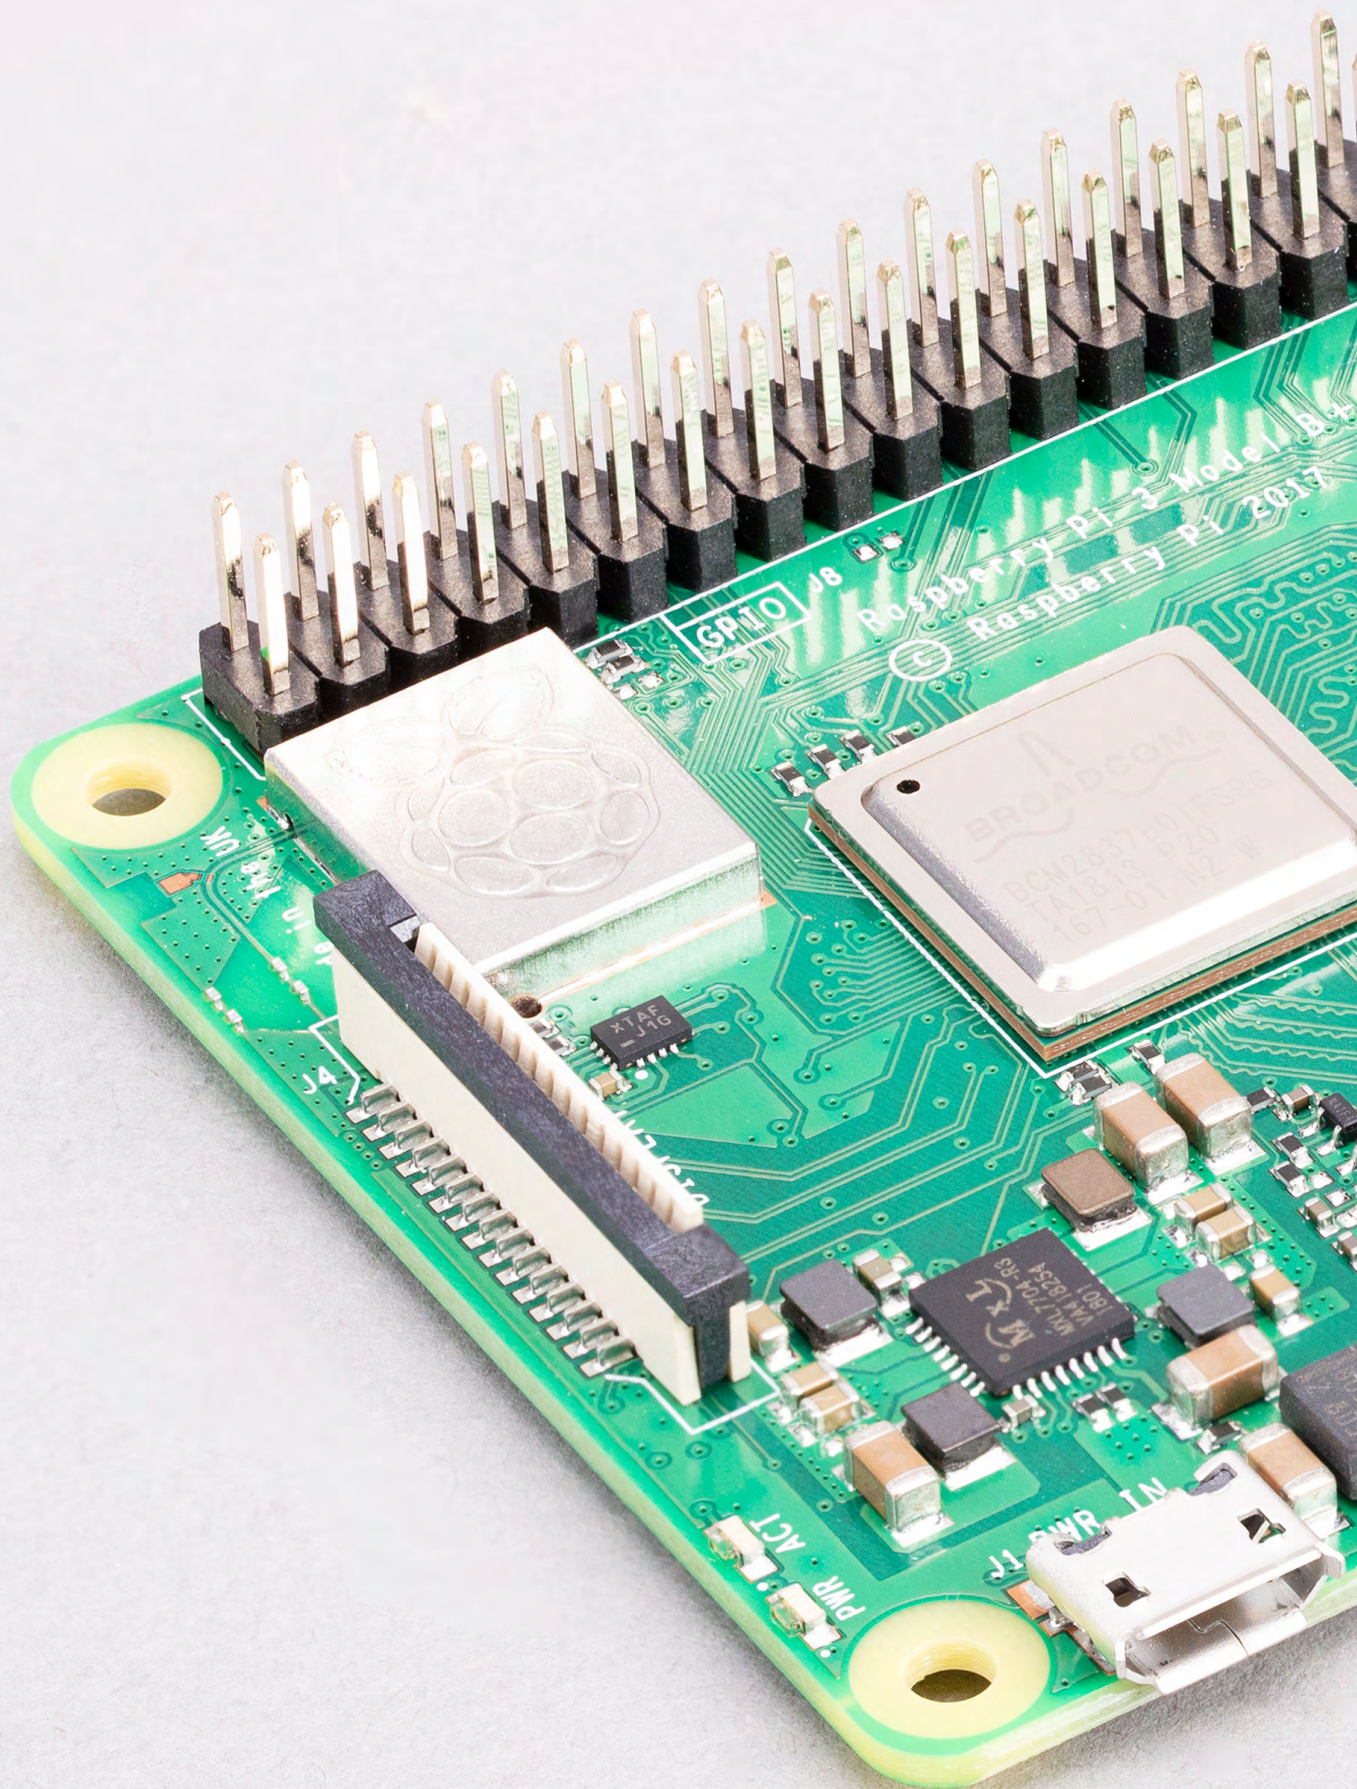



Raspberry Pi is a trademark of Raspberry Pi Ltd



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com