

Parameters

ID	Parameter	Range	Resolution	Min. Detection	Working Principle	Expected Sensor Life
OZWSD_1	Wind Speed	0-40 m/s	0.1 m/s	0.1 m/s	Ultrasonic	3 years
	Wind Direction	0-359°	1°	1°		
OZRAIN_1	Rainfall Monitoring	N.A.	0.5 mm	0.5 mm	Tipping bucket	2 years
OZN_1	Ambient Noise	Up to 140 dB	1 dB	0.5 dB	Capacitance	
OZLI_1	Light Intensity	Up to 1,00,000 Lux	1 Lux	1 Lux	Photoconductivity	3 years
OZUV_1	UV Radiation	0.1-100,000 uW/cm²	0.1 uW/cm²	0.1 uW/cm²		
OZVLI_1	Visible Light Intensity	Upto 5000 Lux	0.1 Lux	0.1 Lux		
OZTEMP_1	Temperature	-40°C to 125°C	0.01 °C	-40°C	Solid State Semiconductor Sensing	2 years
OZHUM_1	Humidity	100% Rh	0.1%	0.1%		
OZPRES_1	Barometric Pressure	300-1100 hPa	0.18 Pa	300 hPa		

Note - If a custom range and resolution of a sensor is required, please contact our team.


External Modules (optional)



Noise Sensor

- Capacitance
- Upto 140 dB

Specifications

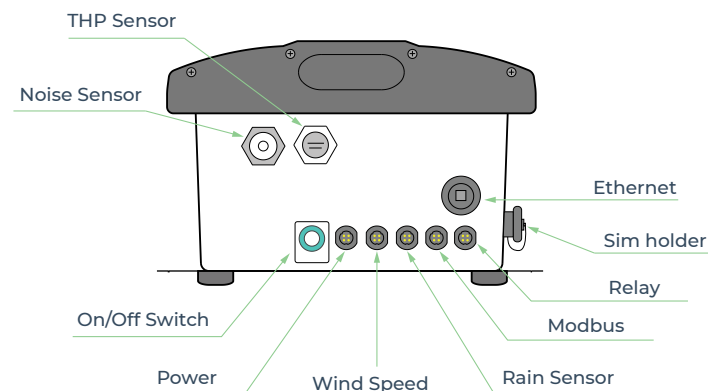

General Specs

Size	360mm (H) x 328mm (W) x 200mm (D)
Weight	8.7 Kg (instrument weight)
Material	Aluminum Magnesium Alloy, Mild-steel (With Powder Coating), FRP
Certifications	CE & FCC Certified, PTCRB Certified Communication Module

Communication

Data Interval	2-30 (configurable) minutes
Data-push Protocol	HTTP post request to host-server
Data-pull	HTTP request on device IP
Firmware Updates	Over-The-Air Firmware Update
Standby Connectivity	GSM (2G / 3G / 4G) for remote diagnosis, FOTA updates, and cloud calibration

	Connectivity Options	Specifications
Wireless	GSM LoRa LTE NB-Iot Sigfox Wifi	Global 2G / 3G / 4G 868 MHz / 915 MHz CAT-M1 CAT-NB1 868 to 869 MHz, 902 to 928 MHz AP Mode and Station Mode
Wired	Ethernet Modbus Relay Output	Static / DHCP Configuration RS485 RTU / TCP 2 Channel



ES France - Département Bio-tests & Industries
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90
Fax. 01 47 01 16 22



e-mail : bio@es-france.com
Site Web : www.es-france.com