




SM15K - Series 15kW DC POWER SUPPLIES

Bi-Directional - Constant Power

Models	Voltage range	Current range
SM70-CP-450	0 – 70 V	- 450 – 450 A
SM210-CP-150	0 – 210 V	-150 – 150 A
SM500-CP-90	0 – 500 V	-90 – 90 A
SM1000-CP-45	0 – 1000V	-45 – 45 A
SM1500-CP-30	0 – 1500 V	-30 – 30 A



Features

- Bi-directional power supply, standard 15kW Source & Sink
- Flexible output with constant power characteristic
- Power regeneration technology: sink power is not dissipated but fed back into the grid
- Designed for long life at continuous full power
- Excellent dynamic response to load changes, digital controlled with the possibility to adapt to the type of load
- Very low heat dissipation, efficiency 95% or more
- Protected against all overload and short circuit conditions

Functionalities

- Operation on a wide range of three phase AC input voltages
- Standard ethernet & web interface
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: temperature controlled cooling fans
- Durable digital encoders for voltage & current adjustment and menu operation
- Large user display, menu driven operations



	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1000-CP-45	SM1500-CP-30
Output rating					
Voltage range	0 - 70 V	0 - 210 V	0 - 500 V	0 - 1000 V	0 - 1500 V
Current range	- 450 - 450 A	- 150 - 150 A	- 90 - 90 A	- 45 - 45 A	- 30 - 30 A
Regenerative mode					
Minimum sink voltage	1.2 V @ - 450 A	3.0 V @ - 150 A	7.0 V @ - 90 A	12.0 V @ - 45 A	19.5 V @ - 30 A
<i>Note: Unit switches automatically between source ↔ sink.</i>	0.8 V @ - 215 A	1.5 V @ - 75 A	4.0 V @ - 30 A	8.5 V @ - 15 A	14 V @ - 10 A
Absolute maximum sink voltage	0.8 V @ - 45 A	1.5 V @ - 15 A	1.8 V @ - 10 A	2.5 V @ - 5 A	4.5 V @ - 3 A
Minimum sink current	74 V	220 V	525 V	1050 V	1575 V
Minimum sink power	0.4%	0.4%	0.4%	0.4%	0.4%
	0.8%	0.8%	1.2%	1.2%	1.2%
AC Input					
Rated voltage range	380 - 480 V				
Rated frequency	50 / 60 Hz				
Rated current	Maximum 27 A				
Current, 15kW	23 A				
Power factor, 15kW / 7.5kW	0.996 / 0.988				
Internal fuses	30 AT				
Standby input power ($V_o=I_o=0$) ¹	100 W				
Standby input power ($V_o=V_{max}$) ¹	180 W				
Efficiency (Sink & Source mode):					
15 kW, $I_{out}=100\%$	95 %				
15 kW, $U_{out}=100\%$	96 %				
Regulation					
Load 0 - 100% CV	6 mV	5 mV	4 mV	10mV	10 mV
Line 342 - 528 V _{AC} ² CV	< 1 mV	< 1 mV	< 1 mV	<1mV	< 1 mV
Load 0 - 100% CC	35 mA	12 mA	8 mA	2mA	2 mA
Line 342 - 528 V _{AC} ^{1,3} CC	4 mA	3 mA	1 mA	1mA	1 mA
Ripple + noise ⁵					
Source mode:	33 V / 450 A	100 V / 150 A	167 V / 90 A	333V / 45A	500 V / 30 A
rms (BW=300 kHz) CV	10 mV	30 mV	10 mV	25mV	25 mV
p-p (BW=20 MHz) CV	60 mV	150 mV	55 mV	150mV	150 mV
rms (BW=300 kHz) CC	100 mA	-	45 mA	45mA	12 mA
p-p (BW=20 MHz) CC	-	-	200 mA	200mA	70 mA
	70 V / 215 A	210 V / 71.5 A	500 V / 30 A	1000V / 15A	1500 V / 10 A
rms (BW=300 kHz) CV	10 mV	20 mV	25mV	35mV	35mV
p-p (BW=20 MHz) CV	60 mV	125 mV	115mV	250mV	250mV
rms (BW=300 kHz) CC	100 mA	-	45 mA	45mA	5 mA
p-p (BW=20 MHz) CC	-	-	200 mA	200mA	25 mA
Sink mode:	33 V / 450 A	100 V / 150 A	167 V / 90 A	333V / 45A	500 V / 30 A
rms (BW=300 kHz) CV	8 mV	30 mV	7 mV	15mV	15 mV
p-p (BW=20 MHz) CV	50 mV	150 mV	35 mV	75mV	130 mV
rms (BW=300 kHz) CC	100 mA	-	45 mA	60mA	10 mA
p-p (BW=20 MHz) CC	-	-	200 mA	-	60 mA
	70 V / 215 A	210 V / 71.5 A	500 V / 30 A	1000V / 15A	1500 V / 10 A
rms (BW=300 kHz) CV	8 mV	20 mV	10 mV	25mV	25 mV
p-p (BW=20 MHz) CV	50 mV	125 mV	50 mV	125mV	200 mV
rms (BW=300 kHz) CC	100 mA	-	90 mA	60mA	3 mA
p-p (BW=20 MHz) CC	-	-	320 mA	-	12 mA
Programming & monitoring accuracy ⁴					
Voltage	± 0.08%				
Current	± 0.15%				
Temperature coefficient, per °C ^{1,5}					
CV	20 ppm				
CC	50 ppm				
Stability over 8 hours ^{1,5}					
CV	50 ppm				
25 ± 1 °C CC ³	80 ppm				

¹ After 1 hour warm up² Remote voltage sense³ Local voltage sense⁴ Full load, 15kW, 1500V

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1000-CP-45	SM1500-CP-30
Programming speed ^{6, 7} Rise time (10 - 90%) Output voltage step Load = 15 kW Load = 1500 W Output voltage step Load = 15 kW Load = 1500 W Fall time (90 - 10%) Output voltage step Load = 15 kW Load = 1500 W Output voltage step Load = 15 kW Load = 1500 W	0 → 33 V 2.2 ms 1.5 ms 0 → 70 V 5.5 ms 3.5 ms 33 → 0 V 1.5 ms 1.5 ms 70 → 0 V 2.6 ms 3.5 ms	0 → 100 V 1.6 ms 1.3 ms 0 → 210 V 3 ms 2.7 ms 100 → 0 V 1.3 ms 1.3 ms 210 → 0 V 2.5 ms 2.5 ms	0 → 167 V 1.5 ms 1 ms 0 → 500 V 4.5 ms 3.5 ms 167 → 0 V 0.8 ms 0.9 ms 500 → 0 V 2.5 ms 3.5 ms	0 → 333 V 1.5 ms 1 ms 0 → 1000 V 4.5 ms 3.5 ms 333 → 0 V 0.9 ms 1.0 ms 1000 → 0 V 2.8 ms 3.5 ms	0 → 500 V 1.5 ms 1 ms 0 → 1500 V 4.5 ms 3.5 ms 500 → 0 V 0.8 ms 0.9 ms 1500 → 0 V 2.8 ms 3.5 ms
Recovery time ^{8, 9} Condition Recovery within di/dt of load step Time Maximum deviation Condition Recovery within di/dt of load step Time Maximum deviation	33V, 225 → 450A 100 mV 5 A/μs 100 μs 0.8 V 70V, 112 → 215A 100 mV 2 A/μs 100 μs 0.3 V	100V, 75 → 150A 500 mV 2.4 A/μs 100 μs 1.4 V 210V, 36 → 72A 250 mV 1.15 A/μs 100 μs 0.75 V	167V, 45 → 90A 750 mV 0.8 A/μs 100 μs 2.8 V 500V, 15 → 30A 500 mV 0.25 A/μs 150 μs 1.2 V	333V, 22.5 → 45A 2.5 V 0.4 A/μs 100 μs 9.0 V 1000V, 7.5 → 15A 1 V 0.15 A/μs 150 μs 3.0 V	500V, 15 → 30A 2.8 V 0.25 A/μs 100 μs 9.0 V 1500V, 5 → 10A 1.2 V 0.085 A/μs 150 μs 3.5 V
DC output capacitance X-capacitors (typical) Y-capacitors (typical)	22000 μF 950 nF	1170 μF 950 nF	560 μF 145 nF	141 μF 145 nF	58 μF 145 nF
Output impedance ¹⁰ 0-1 kHz 1-100 kHz CV CV	< 0.75 mΩ < 40 mΩ	< 5 mΩ < 40 mΩ	< 16 mΩ < 160 mΩ	< 150 mΩ < 800 mΩ	< 250 mΩ < 2 Ω
Pulsating load Max. tolerable AC component of load current f > 1 kHz f < 1 kHz	60 A _{RMS} 450 A _{pk}	15 A _{RMS} 150 A _{pk}	15 A _{RMS} 90 A _{pk}	3 A _{RMS} 45 A _{pk}	2.5 A _{RMS} 30 A _{pk}
Hold-up time V _{out} = 100%, P _{out} = 15 kW I _{out} = 100%, P _{out} = 15 kW V _{out} = 100%, P _{out} = 7.5 kW	10 ms 10 ms 25 ms	10 ms 10 ms 20 ms	15 ms 15 ms 35 ms	15 ms 15 ms 35 ms	15 ms 15 ms 35 ms
Turn on delay ¹¹	2.5 s after mains switch is turned on, the rated output voltage is reached				
Inrush current ¹⁰	23 A				
Safety standards	EN 60950 / EN 61010				
Insulation AC / DC terminals Creepage / clearance AC power terminals / case DC power terminals / case	3750V _{RMS} (1 min.) 8 mm 2500 V _{RMS} 1000 V _{DC} ¹²				3750 V _{RMS} (1 min.) 8 mm 2500 V _{RMS} 1500 V _{DC} ¹²
EMC Emission Immunity	EN 61326-1 , class B equipment(for use in domestic establishments) EN 61326-1 , equipment for use in industrial and domestic establishments				
Environmental conditions Storage temperature Operating temperature Output automatically disabled at overttemperature Humidity IP Rating Pollution degree	- 40 to + 85 °C - 20 to + 50 °C, Derate output to 75% at 60 °C Maximum 95% RH, non condensing, up to 40 °C Maximum 75% RH, non condensing, up to 50 °C IP20 2				
MTBF	500 000 hrs				

⁶ Measured on resistive load with power supply in CV mode, different conditions may influence the specified speed

⁷ Signal latency depends on the interface used & data traffic

⁸ Local voltage sense

⁹ Remote sensing and long wiring may influence the values

¹⁰ Typical



	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1000-CP-45	SM1500-CP-30
Series operation Maximum total voltage Master / slave operation	Series operation not allowed		750V ¹³ 1000V ¹⁴ Maximum 6 units ¹⁵	Series operation not allowed	
Parallel operation Master / slave operation	Maximum 60 units				
Remote sensing Maximum voltage drop per load lead	Default 1 V, can be set to 10 V				
Limits Adjustable Voltage Current Power Fixed Voltage OverLoad level Voltage Self-Protection level	0 - 101 % 0 - 101 % 0 - 101 % 102.5 % - unit will continue to operate (OL-indication in display) 105 % - output is automatically disabled (PROT-indication in display)				
Potentiometers Front panel control knob resolution	15 bits				
Meter scale Voltage Current Power Accuracy read output	4 digit 0.00 - 70.00V -450.0 - 450.0A -15000 - 15000W 0.2% + 2 digit	4 digit 0.0 - 210.0V -150.0 - 150.0A -15000 - 15000W 0.2% + 2 digit	4 digit 0.0 - 500.0V -90.0 - 90.0A -15000 - 15000W 0.2% + 2 digit	4 digit 0 - 1000V -45.00 - 45.00A -15000 - 15000W 0.2% + 2 digit	4 digit 0 - 1500V - 30.00 - 30.00A -15000 - 15000W 0.2% + 2 digit
Mounting	Stacking of units allowed				
AC terminals (CON A)	Screw terminals for wire 4 mm ² , 3 phase + earth (no neutral)				
DC terminals (CON B1 & B2)	M12 bolts	M8 bolts			
Programming connectors (LAN)	Standard with RJ45-connector for Ethernet at rear panel, 100 Mb/s, full-duplex				
Interlock (CON F)	Input for contact at rear panel				
Cooling Audio noise level Airflow direction Thermal protection	Low noise, fan speed adapts to temperature of internal system ca. 50 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 65 dBA at full load, 50 °C ambient temperature, 1 m distance From left to right Output shuts down in case of insufficient cooling (over temperature indication in display)				
Dimensions Front panel: h x w behind front panel: h x w x d	132 x 483 mm (19", 3 U) 128 x 448 x 591 mm (excluding feet) <i>No additional depth is required with optional interfaces assembled</i>				
Weight	27 kg				

CV = Constant Voltage

CC = Constant Current


CP = Constant Power

Specifications measured at $T_{amb} = 25 \pm 5 \text{ °C}$ and $V_{in} = 400 \text{ V}_{AC}$, 3 phase, 50 Hz unless otherwise noted. The information in this document is subject to change without notice.


¹³ Units delivered before Q4 / 2018. Contact factory for upgrading to enable 1000V series operation for older units.



Dimensions

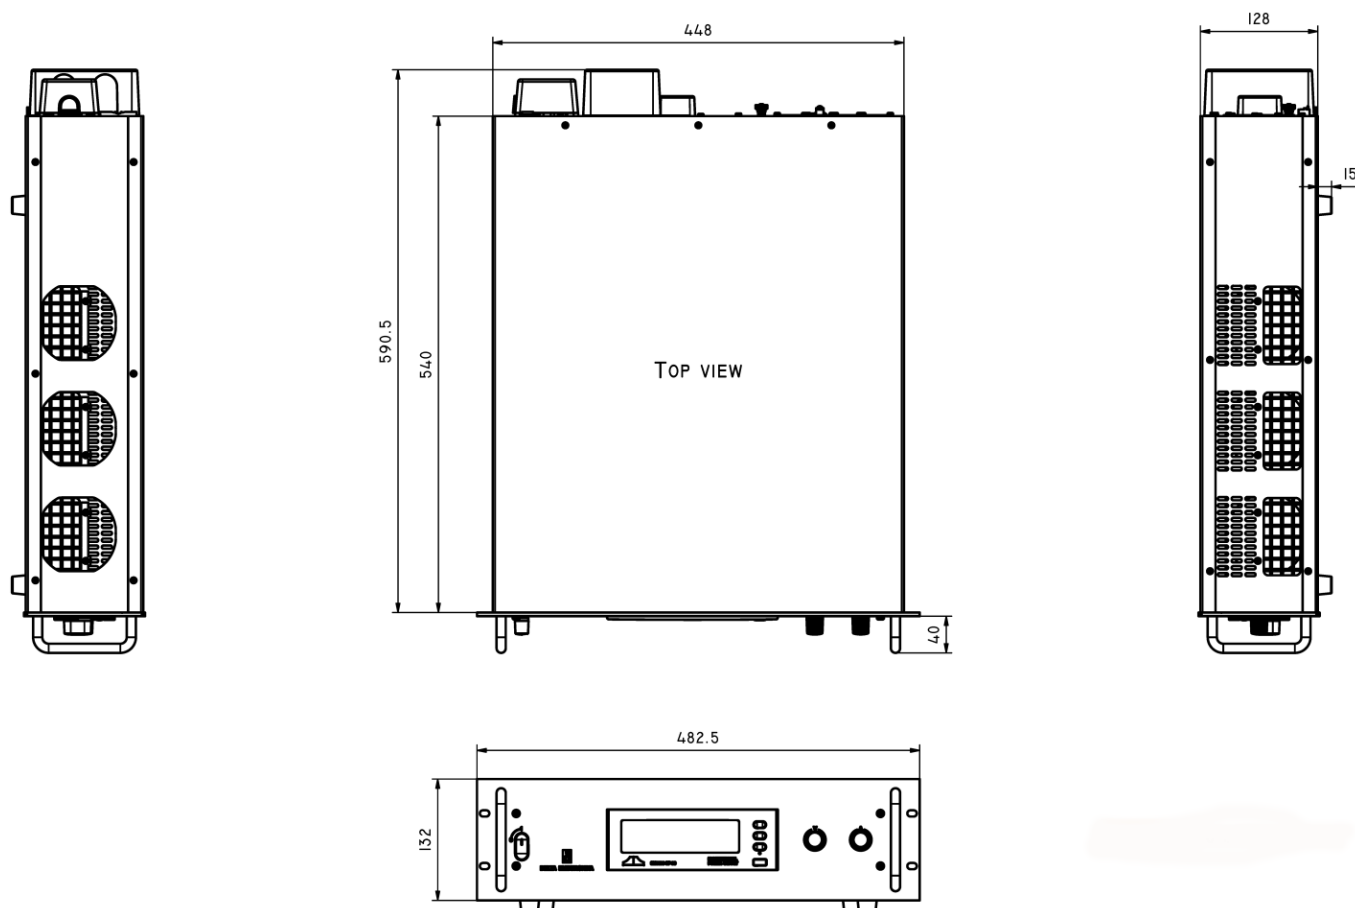

Rear view

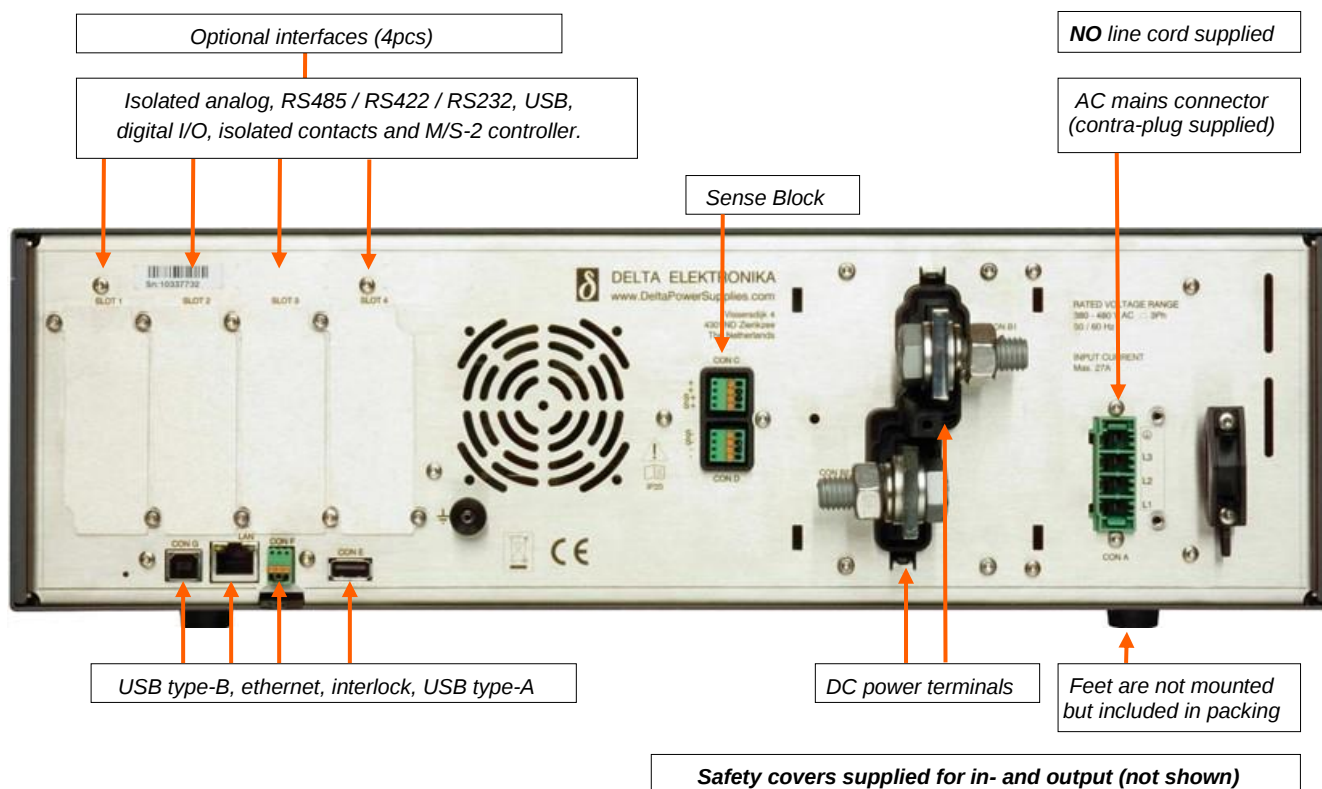

Typical Applications

- Solar inverter testing, PV-Simulation
- Automotive battery simulations
- Driving PWM-Controlled DC motors
- Car testing systems
- Controlled battery (dis)charging
- Accurate current sources
- ATE in industrial production lines
- Lasers
- Aerospace and military equipment
- Plasma chambers
- Sustainable energy

Standard Features



Bi-Directional Two-Quadrant Output

Full power Bi-Directional two quadrant operation maintains the DC output voltage constant whether the output power is positive or negative. Ideal for PWM-speed controlled DC-Motors and ATE systems.



Digital CV-, CC- and CP-Settings

Reliable, long-life digital encoders are mounted at the front panel. Includes total front panel lock (also for CV- / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



High Voltage Isolation

A high DC output isolation allows floating operation up to 1000 V for SM70-CP-450, SM210-CP-150, SM500-CP-90 and SM1000-CP-45 and up to 1500 V for SM1500-CP-30.



Sequencer

Arbitrary Waveform generator or standalone automation.



Ethernet Interface

Ethernet interface for programming and monitoring



USB-Input

Not yet available: USB-Input for exchange of settings or for controlling the unit.

Options



Software control and Interfaces

Field installable interfaces:

- Master / Slave controller
- Isolated Contacts
- Serial controller with multiple protocols: RS 232, RS 485, RS 422 and USB (Device)
- Digital I/O
- Isolated Analog Programming

Order Codes:

- INT MOD M/S-2
- INT MOD CON
- INT MOD SER
- INT MOD DIG
- INT MOD ANA

