

ESD Simulator

ESS-S3011A & GT-30RA

Smart model equipped high function & extendibility

EMC test equipment to evaluate the resistibility of electronic equipments when energy charged on a human body or object is discharged to the electronic equipment. This can be available for evaluating malfunctions or functions declines of electronic equipment against the ESD.

Programmable simulator to ease some complicated tests. The output voltage is up to 30kV and performable IEC61000-4-2 & ISO 10605 Standards compliant tests.

- “3 pre-checking function” to make sure the more confirmable test
- “CR constant indicator” to make sure the correct unit attachment
- One-touch exchange of gun head and CR unit realized
- “Ten-key & Rotary knob” to ease the setting.
- “Infra-red Remote Controller” to realize the setting remotely from the generator (Standard attached).
- “Discharge Detecting Function” to realize the air-discharge confirmation.
- “Lightest discharge gun in the market” to lighten the continuous operation (Excluding the cable and connector)
- “White LED Irradiator” to facilitate the visualization of the discharging areas.
- “Control Software” to enable the test result reporting and control with PC.

* The software is scheduled to be downloaded freely from our web-site (The connection cable is necessary in addition).

* C (Capacitor) and R (Resistor) for the discharge gun is one-body unit.

* ISO 10605 compliant test can be realized with the optional parts in addition.



*Probe stand for the discharge gun is option.

ESD simulator
ESS

Feature

● More insurable test realized ! “3 pre-checking function” built-in



[Check 1] Check high voltage output Confirm error to the set value.

[Check 2] Check withstanding voltage

Confirm whether withstanding voltage is normal or defective

The output and defectiveness are checked upon insertion of the discharge gun to the attached gun holder.

[Check 3] Check discharge relay operation

Confirm whether the relay is exhausted or still available.

Confirmable by touch of the discharge gun to the check terminal on the generator and discharge.



Photo of the operation


● “CR constant indicator” to make sure the correct unit attachment.



Whether the gun head corresponds to IEC or ISO ?



What values are the charge capacitor and discharge resistor ?

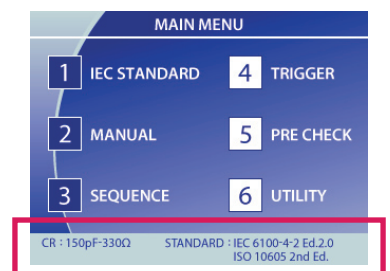

Indicated on the display of the generator



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com


ESS-S3011A & GT-30RA

● Lighter and more user-friendly discharge gun

The discharge gun has been renewed completely to materialize a considerable Weight reduction and best gravity balance.

Human load in the operation can be remarkably reduced comparing to the previous model. Please realize it on-hand actually.

Also, an event of air discharge can be visualized with LED light on the body in this new discharge gun although the previous one has to be confirmed only with human eyes. In addition, various functions are added like one-touch exchange of CR unit, LED irradiator to shine the discharging points, etc.

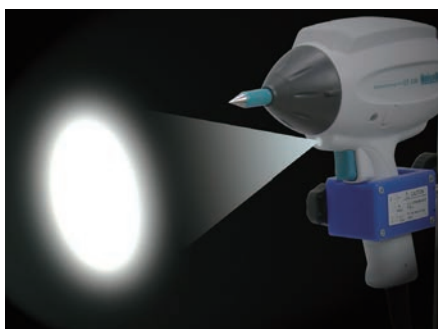

LED irradiator built-in to shine the discharging points




One-touch exchangeable CR unit



Easily exchangeable gun head



More light and comfortable handling

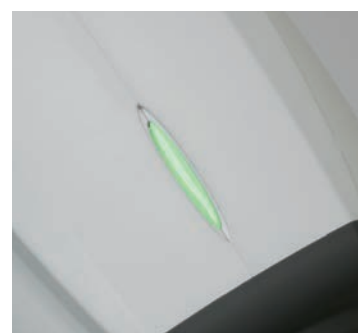

LED irradiator to visualize the discharge
(Change the color from red to green upon the discharge)

● “Infra-red Remote Controller” standard attached to realize the setting remotely from the generator


Start/Stop

Polarity
change

Voltage
Up / Down

Air/Contact
discharge
change

Gun trigger
function
Count reset
Sequence change
F key assignment
etc.



Most of the operation can be controlled by the remote controller.



ESS-S3011A & GT-30RA

● ISO 10605 standard compliant discharge gun package available



Options for ISO 10605 Standard compliant test





Model	Name
12-00009A	Discharge tip (GT-30R series Spherical 30mm)
03-00072A	Gun head to GT-30R series for constant 2kΩ test
06-00074B	CR unit (150pF - 2kΩ) to GT-30R series
06-00076B	CR unit (330pF - 2kΩ) to GT-30R series
06-00075B	CR unit (330pF - 330Ω) to GT-30R series



● High visibility LCD panel and operability

Reviewed the past operability so that more easy and optimal operation can be realized.

In "1 IEC STANDARD" in MAIN MENU, since the test levels are preset, the test parameters can be set easily only with selection of the test level. In "2 MANUAL", voltage and number of times of the test can be selected and also the set conditions can be recorded. Sweeping discharges can be set as well. In "3 SEQUENCE", the set conditions in MANUAL can be recalled for combining them so as to realize the arbitrary sequential tests. In addition, varied functions like setting for gun trigger, automated ESD eliminator, etc. are equipped.

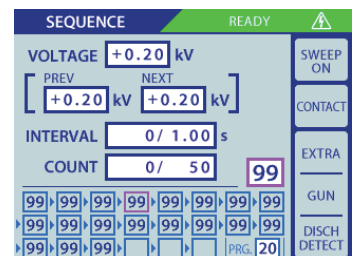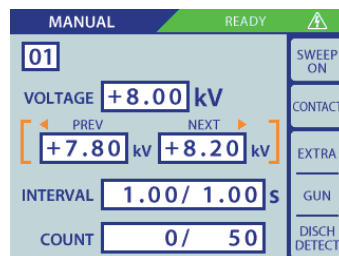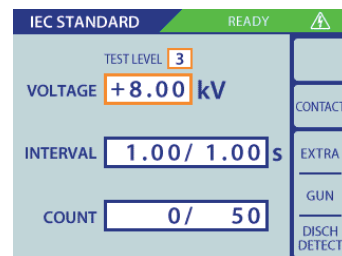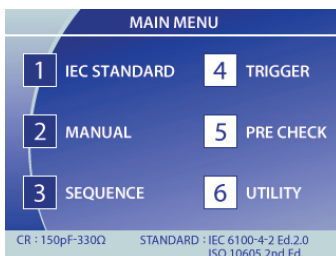

Specification

Parameter	Specification
Polarity	Positive / Negative
Output voltage	0.20kV ~ 30.0kV±5% (30.5kVmax) ~10.0kV : 0.01kV step ~30.0kV : 0.1kV step
Repetition cycle	0.05s ~ 600s±10% / Manual Set step : 0.01s (0.05 ~ 9.99s), 0.10s (10.0 ~ 600.0s)
No. of time of discharge	1~60,000 times, Preset 1 time step or continuous preset
Discharge mode	Contact discharge / Air discharge
Radiation level mode	NORMAL mode / EXTRA mode
Trigger mode	Gun trigger / Main trigger / External trigger
Operation panel	Color LCD / Push-buttons (Partially lighting)
Gun holder	Standard attached (to hold the discharge gun Model GT-30RA)
Radiation mode select switch	Extra / Normal switching function built-in
Discharge detection	Discharge detection function in air-discharge equipped
Pre-checking function	Following 3 steps function equipped (by user operation. Not the calibration but just checking) STEP1 : High voltage output checking STEP2 : Withstanding voltage checking STEP3 : Discharge relay operation checking
CR & Gun head checking	CR constant and gun head recognizable (with an indicator to prevent the wrong combination)

Parameter	Specification
"IEC STANDARD"	Contact discharge mode : 2.0kV, 4.0kV, 6.0kV and 8.0kV step test mode Air discharge mode : 2.0kV, 4.0kV, 8.0kV and 15.0kV step
"MANUAL"	Contact / Air discharge mode, Arbitrary setting during 0.2kV~30.0kV test mode Sweeping function built-in, Recordable up to 99 units
"SEQUENCE"	Enables to operate units set in MANUAL mode continuously. test mode Max. 22 steps / 1 program and the programs recordable up to 20.
Warning lamp	Lighting at voltage output from the generator. Blinking at electro-static discharging
Charge capacitor / resistor	150pF±10%, 330Ω±10%(Built-in CR unit for discharge gun GT-30RA)
Charge resistor in generator	10MΩ(Totally 53Ω in combination with 43MΩ in discharge gun)*
AUX connector	D-SUB 15pins female connector (for connecting to patrolight, automated ESD eliminator, external interlock input, external trigger input terminal)
Optical communication	Optical connector (serial interface) for connecting to PC connector
Power supply / consumption	AC100V~AC240V 50Hz / 60Hz ±10% 75VA
Dimensions	Generator : (W)392mm X (H)312mm X (D)295.3mm (gun holder included) Discharge gun : (W)83.3mm X (H)217.2mm X (D)229.3mm
Weight	Generator : approx. 7.5kg Discharge gun : approx. 800 g (cable and connector excluded)

* The constant depends on combination with CR unit for the discharge gun



ESD Simulator

ESS-B3011A & GT-30RA

Cost-oriented Basic models

Cost-oriented basic model ESD Simulator the light Weight discharge gun attachable.
The output voltage can be selected max. 30kV.
And compliant to both EN/IEC61000-4-2 Standard and ISO10605 Standard.

- “Pre-checking function” taking the confirmable test into the account
- “CR constant checking function” (No indicator) to make the correct unit attachment sure”
- “Discharge Detecting Function” to realize the air-discharge confirmation.
- “Lightest Discharge Gun in the market” to lighten the continual operation”
- “White LED Irradiator” to facilitate the visualization of the discharging area.
- One-touch exchange of gun head and CR unit realized

* ISO 10605 compliant test performable with addition of the gun head and CR units (only with ESS-B3011A)



*Probe stand for the discharge gun is option.

Specification

Parameter	Specification
Modell	ESS-B3011A
Output voltage	0.20kV~30.0kV±5%(30.5kVmax)
Polarity	Positive / Negative
Repetition cycle	0.05s~9.99s±10%, 0.01s step / Manual
No. of time of discharge	1~999 times, Preset 1 time step or continuous preset
Discharge mode	Contact discharge / Air discharge
Trigger mode	Gun trigger / Main trigger
Operation panel	Indicator : 5X7 Dot matrix LED / Operation : Push buttons (Partially lighting)
Radiation mode select switch	Extra / Normal switching function built-in
Discharge detection	Discharge detection function in air-discharge equipped.
Pre-checking function	High voltage output checking function (by user operation. Not the calibration but just checking)
CR & Gun head checking	CR constant and gun head recognizable (to prevent the wrong combination without indicator)
IEC LEVEL	Contact discharge mode : 2.0kV, 4.0kV, 6.0kV and 8.0kV step
Switching function	Air discharge mode : 2.0kV, 4.0kV, 8.0kV and 15.0kV step
Warning lamp	Lighting at voltage output from the generator. Blinking at electro-static discharging
Charge capacitor / resistor	150pF±10%, 330Ω±10% (Built-in CR unit for discharge gun GT-30RA)
Charge resistor in generator	10MΩ (Totally 53Ω in combination with 43MΩ in discharge gun)*
Power supply / consumption	AC100V~AC240V ±10% 50Hz / 60Hz 62VA
Dimensions	Generator : (W)270mm X (H)263mm X (D)200mm Discharge gun : (W)83.3mm X (H)217.2mm X (D)229.3mm
Weight	Generator : Approx. 4.8kg Discharge gun : Approx. 800g (excluding cable and connector)

* Remote control function not built-in.

* The constant depends on combination with CR unit for the discharge gun

Discharge output waveform (IEC Standard)

