


GENE-ADN6

3.5" SubCompact Board with Intel Atom® x7000E Series, Intel® Processor N Series, Intel® Core™ i3-N305 Processors

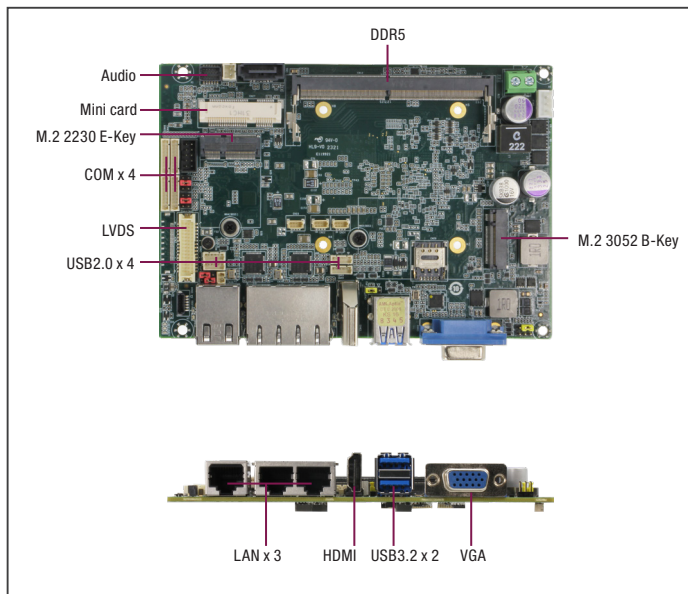

Specifications

System	
Form Factor	3.5" SubCompact Board
CPU	Intel Atom® x7000E Series, Intel® Processor N Series, Intel® Core™ i3-N305 Processors: Intel® Core™ i3-N305 (8C/8T, up to 3.8 GHz, 15W) Intel Atom® x7425E (4C/4T, up to 3.4 GHz, 12W) Intel® Processor N97 (4C/4T, up to 3.6 GHz, 12W) Intel® Processor N50 (2C/2T, up to 3.4 GHz, 6W)
Chipset	Integrated with Intel® SoC
Memory Type	DDR5 4800, Single Channel SODIMM x 1, Max.16GB, Non-ECC
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAH
Dimensions	5.75" x 4" (146mm x 101.7mm), 0.94 lbs (0.43 kg)
OS Support	Windows 10 (64bit) Ubuntu 22.04 / Kernel 5.15.0-25-generic
Power	
Power Requirement	+9V~36V (Optional: +12V)
Power Supply Type	AT/ATX
Connector	Phoenix 2-pin Connector
Power Consumption	Intel® Core™ i3-N305, 16GB x 1, 3.80A@ +12V (TYPICAL) Intel® Core™ i3-N305, 16GB x 1, 5.48A@ +12V (MAX)
Display	
Controller	Intel® UHD Graphics
LVDS/eDP	LVDS x 1, Dual Channel 18/24bit, up to 1920 x1080
Display Interface	HDMI 1.4 x 1, up to 3840 x2160 @30Hz VGA x 1, up to 1920 x1080
Multiple Display	Up to 3 Simultaneous Displays
Audio	
Codec	Realtek ALC897
Audio Interface	Line-In / Line-Out / Mic (Audio function not available for WiTAS SKU)
Speaker	—
External I/O	
Ethernet	Intel® i226 2.5G, RJ-45 x 3
USB	USB3.2 Gen 2 x 2
Serial Port	—
Video	HDMI 1.4 x 1, VGA x 1
Internal I/O	
USB	USB2.0 x 4
Serial Port	COM1, COM2 (RS232/422/485, supports 5V/12V/RI) COM3, COM4 (RS232)

Features

- Intel Atom® x7000E Series, Intel® N series, and Intel® Core™ i3-N305 Processors
- DDR5 4800 MHz, SODIMM x 1, Up to 16GB
- HDMI 1.4, VGA, LVDS x 1
- Intel 2.5GbE x 3, SATA 6.0 Gb/s x 1, GPIO x 8bit
- USB3.2 Gen2 x 2, USB2.0 x 4, RS-232/422/485 x 2, RS-232 x 2
- Mini PCIe card x 1, M.2 E-Key 2230 x 1, M.2 B-Key 3052 x 1
- Wide DC Input 9-36V



Video	LVDS x 1, Inverter x 1 (12V/2A)
SATA	SATA 6.0 Gb/s x 1 +5V SATA Power Connector x 1
Audio	Audio Header x 1 (Optional, Audio function not available for WiTAS SKU)
DIO/GPIO	GPIO 8-bit
SMBus/I2C	SMBus / I2C x 1 (Default: SMBus)
Touch	—
Fan	4pins Smart Fan x 1
Sim	Nano SIM x 1
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	—
Expansion	
Mini PCIe/mSATA	Full-size mSATA / mPCIe x 1 (Default: mSATA, select by BIOS)
M.2	M.2 2230 E-Key x 1 (PCIe 3.0 [x1] + USB2.0) M.2 3052 B-Key x 1 (USB3.2 Gen2 + USB2.0)
Others	—
Environment & Certification	
Operating Temp.	-4°F ~ 158°F (-20°C ~ 70°C) WiTAS2: -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temp.	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	337,963
EMC	CE/FCC Class A

Packing List


Part Number	Description	QTY
GENE-ADN6	GENE-ADN6 MB	1

Optional Accessories

Part Number	Description	QTY
GENE-ADN6-HSP01	Heat Spreader.100*72*8mm	1
GENE-ADN6-HSK01	Heat Sink.100*72*15.5mm.used with HSP	1
GENE-ADN6-HSK02	Heat Sink.146*78.6*18mm	1
1702150155	SATA HDD Power Cable, 15cm	1
170X000398	Power Cable, DC JACK, 30cm	1
170204010R	Power Cable, Double 4P, 10cm	1
170X000156	Audio Cable, 25cm	1
170X000287	Front Panel Cable, 10cm	1
1701090150	COM Port Cable, 15cm	4
1700050207	USB 2.0 Cable, 20cm	4




Block Diagram

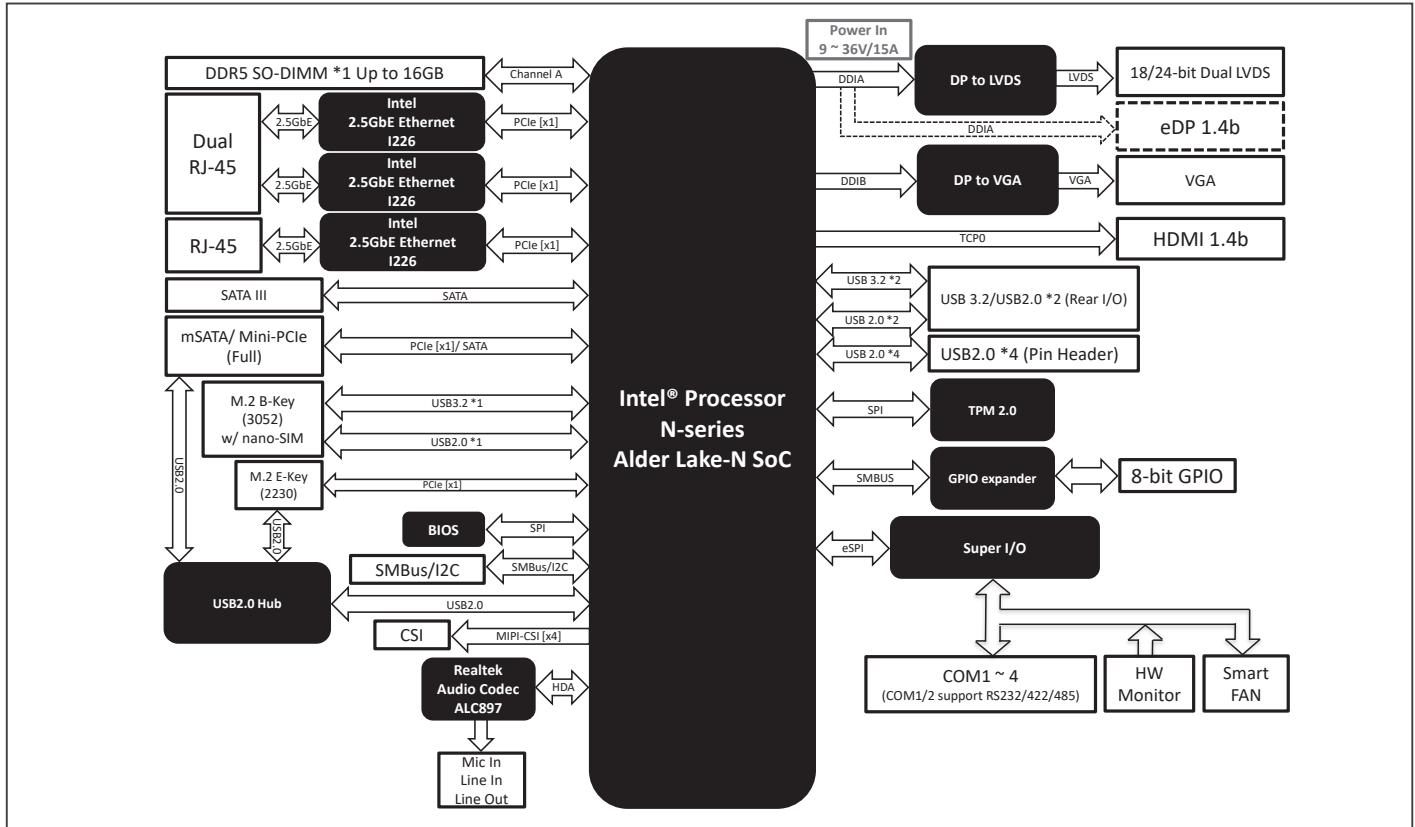

Dimension

Unit: mm

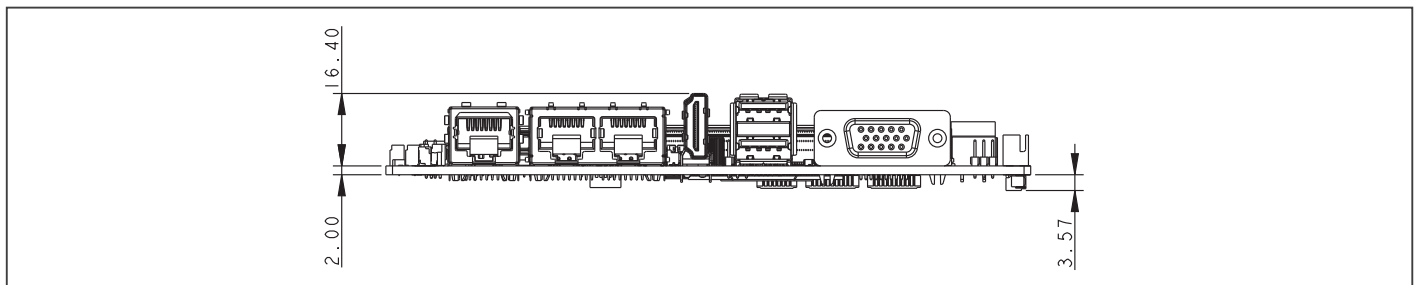

Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232	RS-232/422/485	Storage	Expansion Slot	TPM	Power	Temp	Others
GENE-ADN6-A10-0001	N50	HDMI x1 VGA x1 LVDS x1	2.5GbE x3	USB 3.2 Gen 2 x2 USB 2.0 x4	2	2	SATA x1	M.2 3052 B-Key x1 M.2 2230 E-Key x1 MiniCard x1	2.0	9~36V	-20°C ~ 70°C	Audio, Nano SIM, GPIO x 8, SMBUS
GENE-ADN6-A10-0002	N97	HDMI x1 VGA x1 LVDS x1	2.5GbE x3	USB 3.2 Gen 2 x2 USB 2.0 x4	2	2	SATA x1	M.2 3052 B-Key x1 M.2 2230 E-Key x1 MiniCard x1	2.0	9~36V	-20°C ~ 70°C	Audio, Nano SIM, GPIO x 8, SMBUS
GENE-ADN6-A10-0003	N97	HDMI x1 VGA x1 LVDS x1	2.5GbE x2	USB 3.2 Gen 2 x2 USB 2.0 x4	2	2	SATA x1	M.2 3052 B-Key x1 M.2 2230 E-Key x1 MiniCard x1	—	12V	-20°C ~ 70°C	Audio, Nano SIM, GPIO x 8, SMBUS
GENE-ADN6-A10-0004	i3-N305	HDMI x1 VGA x1 LVDS x1	2.5GbE x3	USB 3.2 Gen 2 x2 USB 2.0 x4	2	2	SATA x1	M.2 3052 B-Key x1 M.2 2230 E-Key x1 MiniCard x1	2.0	9~36V	-20°C ~ 70°C	Audio, Nano SIM, GPIO x 8, SMBUS

Note: A



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com