

PROPERTIES



IP67

Water splash protection
Dust protection, 2m drop protection



Sensors*

Methane, propane, CO, O₂, H₂S,
CO₂

Adjustment/Calibration

Directly on the device
or via test station

Operating time *

Up to 50 hours



Rechargeable battery*

Rechargeable battery changeable,
battery box



Intuitive operation



Data transfer

IR



Data memory

Special probe accessories



OLLI




APPLICATION

Esders



0-1 bar*


0-0,1 MPa*

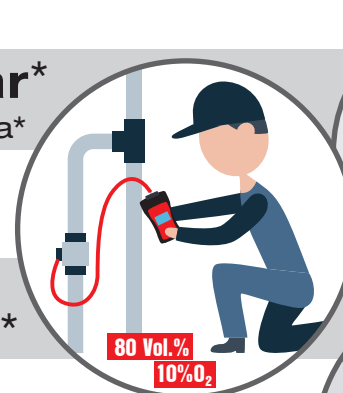


**0-100
Vol.%***




**0-100
%LEL***

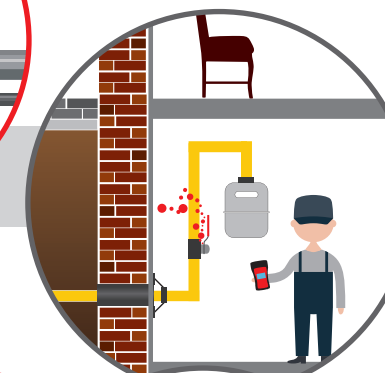

50 ppm



0-1.000 ppm*

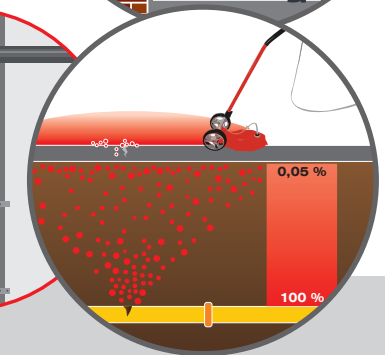

* Not all features are available for all countries.
Availability of features is subject to device
configuration and status 2021/12

ES France - Département Bio-tests & Industries
127 rue de Buzenval BP 26 - 92380 Garches

Tél. 01 47 95 99 90
Fax. 01 47 01 16 22

e-mail : bio@es-france.com
Site Web : www.es-france.com