



SMPS Female to SMPS Female Adapter, Bullet,
OAL 0.098 inches, 65 GHz, 50 Ohm

RF Adapters Technical Data Sheet

PE9990

Configuration

- SMPS Female Connector 1
- SMPS Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features

- 50 µin minimum contact plating
- Gold Plated Beryllium Copper Contact

Applications

- General Purpose Test

Description

Pasternack's PE9990 SMPS female to SMPS female adapter is part of our full line of RF components available for same-day shipping. Our SMPS to SMPS adapter has a female to female gender configuration. PE9990 SMPS female to SMPS female adapter operates to 65 GHz.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		65	GHz
Impedance		50 Ohm		
Insertion Loss			0.64	dB

Mechanical Specifications

Size	
Length	0.10 in [2.49 mm]
Width	0.07 in [1.73 mm]
Height	0.07 in [1.73 mm]
Weight	0.00 lbs [0.05 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMPS Female to SMPS Female Adapter, Bullet, OAL 0.098 inches, 65 GHz, 50 Ohm PE9990](#)





SMPS Female to SMPS Female Adapter, Bullet,
OAL 0.098 inches, 65 GHz, 50 Ohm

RF Adapters Technical Data Sheet

PE9990

Description	Connector 1	Connector 2
Type	SMPS Female	SMPS Female
Polarity	Standard	Standard
Mating Cycles, Min*	500	500

Mechanical Specification Notes:

*500 cycles when mated with Smooth Bore and 100 cycles when mated with Full Detent male connector.

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	SMPS Female		SMPS Female	
Contact	Beryllium Copper	Gold 50 µin minimum	Beryllium Copper	Gold 50 µin minimum
Insulation	PTFE		PTFE	
Outer Conductor	Beryllium Copper	Gold 50 µin minimum	Beryllium Copper	Gold 50 µin minimum

Environmental Specifications

Temperature

Operating Range -55 to -165 °C

Humidity

MIL-STD-202, Method 106, Less Step 7B

Shock

MIL-STD-202, Method 213, Condition I

Vibration

MIL-STD-202, Method 204, Condition D

Thermal Shock

MIL-STD-202, Method 107, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMPS Female to SMPS Female Adapter, Bullet, OAL 0.098 inches, 65 GHz, 50 Ohm PE9990](#)





SMPS Female to SMPS Female Adapter, Bullet,
OAL 0.098 inches, 65 GHz, 50 Ohm

RF Adapters Technical Data Sheet

PE9990

SMPS Female to SMPS Female Adapter, Bullet, OAL 0.098 inches, 65 GHz, 50 Ohm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMPS Female to SMPS Female Adapter, Bullet, OAL 0.098 inches, 65 GHz, 50 Ohm PE9990](https://www.pasternack.com/smps-female-to-smps-female-adapter-pe9990-p.aspx)


URL: <https://www.pasternack.com/smps-female-to-smps-female-adapter-pe9990-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE9990 CAD Drawing

SMPS Female to SMPS Female Adapter, Bullet, OAL 0.098 inches, 65 GHz, 50 Ohm

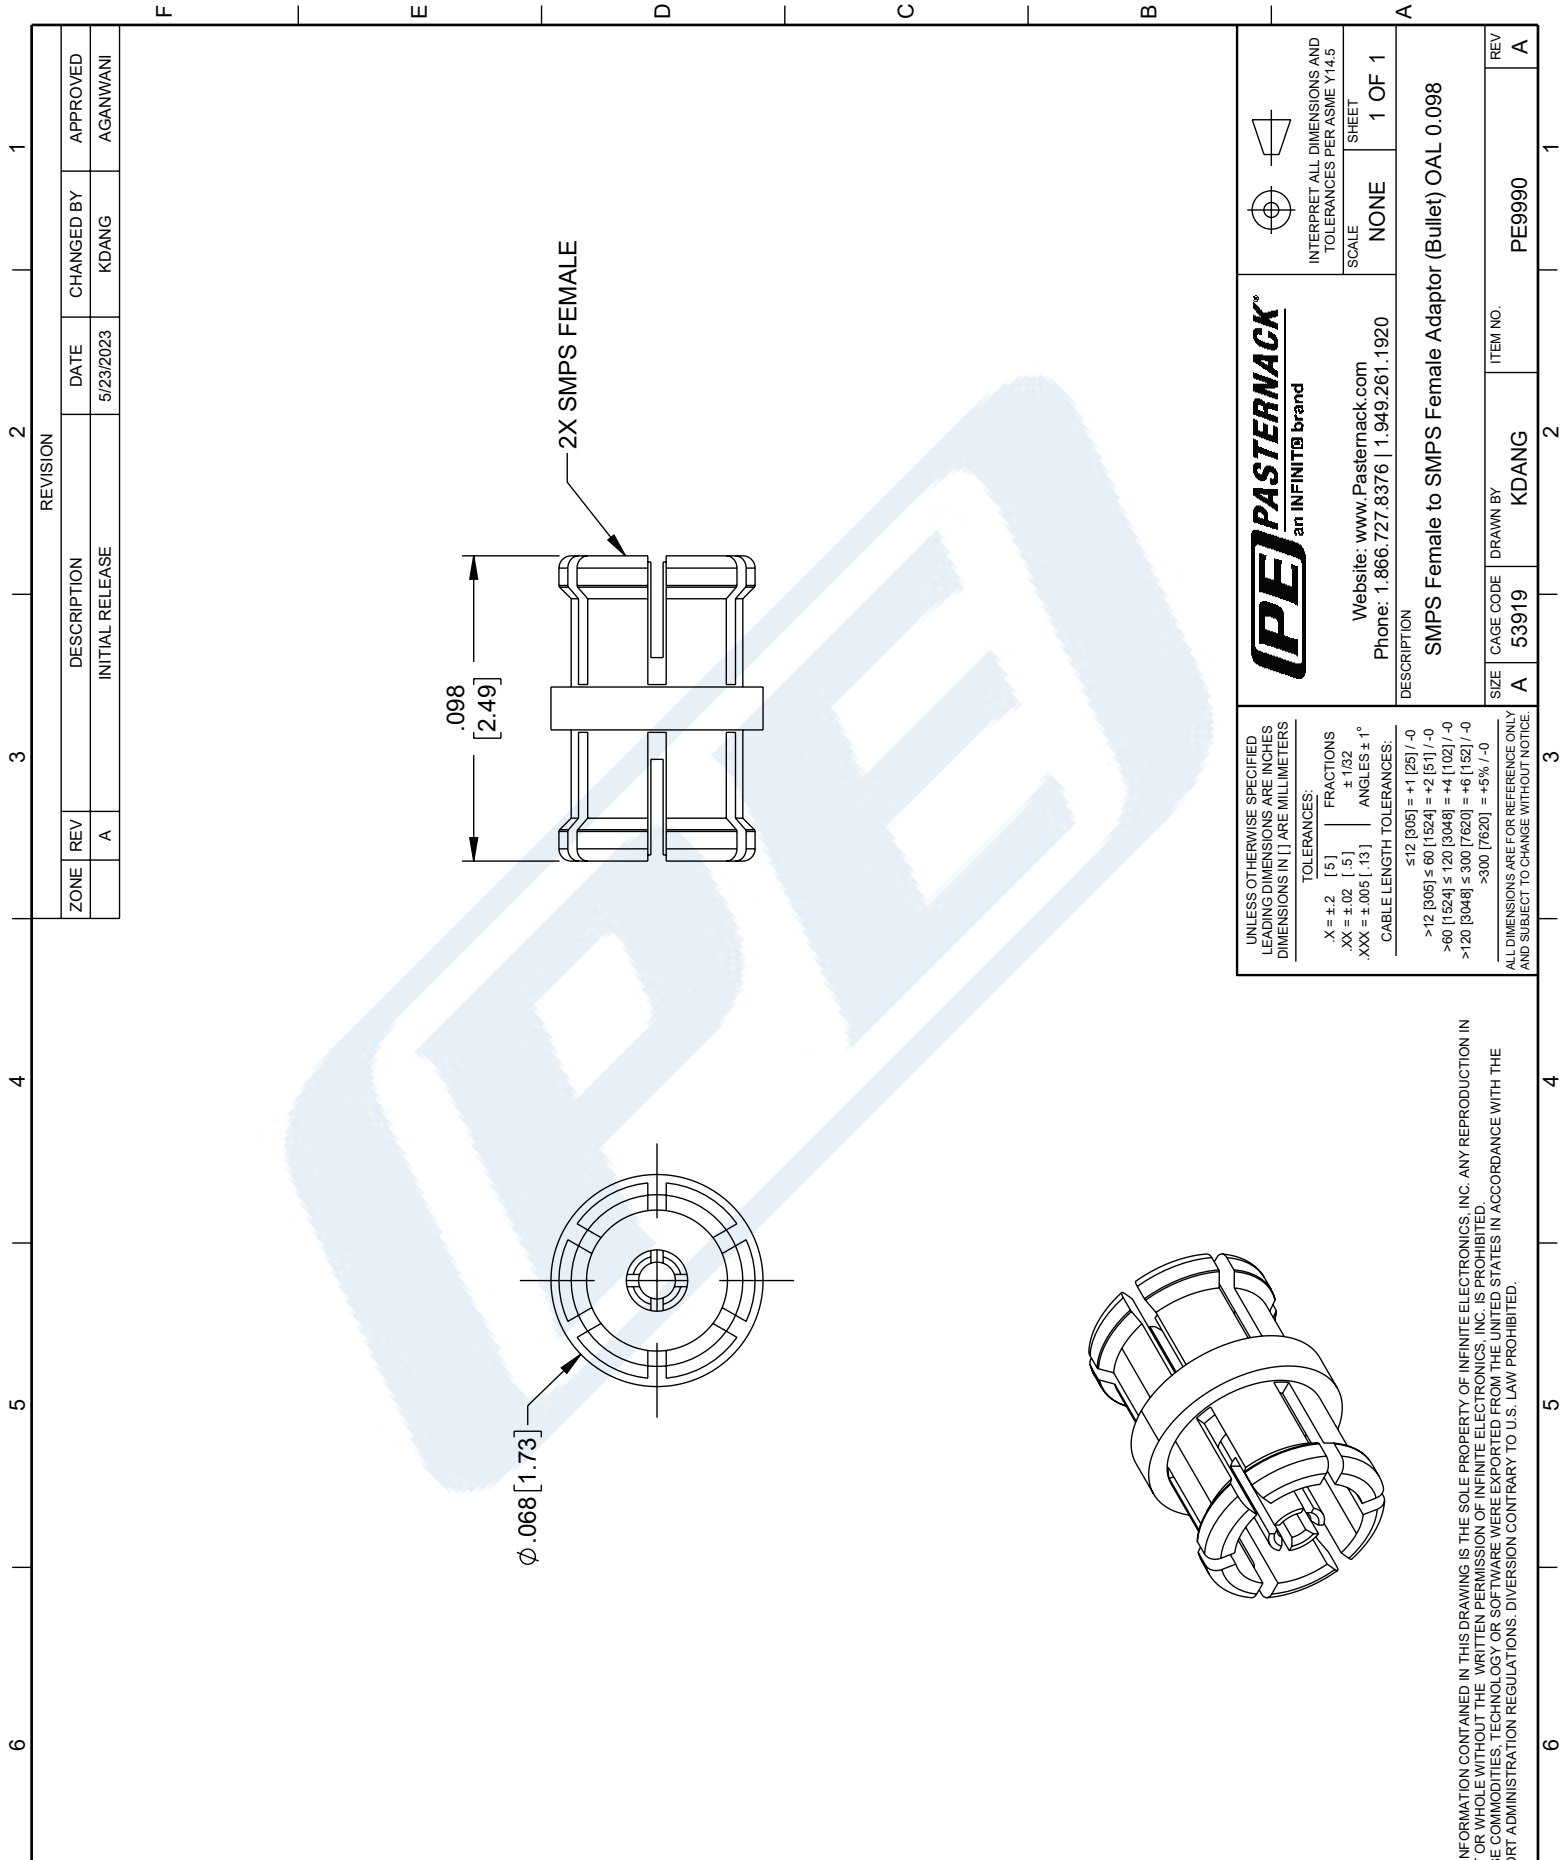

ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com