

PFC High current inductor (flat wire)



- Rate current: 10-20A
- Low loss
- Application: Photovoltaic Inverter, Air conditioning, Washing machine
- Operating Temperature: -25°C to +130°C


ELECTRICAL SPECIFICATIONS @25°C

Model No.	I _{rms} (A)	Inductance ($\mu\text{H} \pm 15\%$)	DCR ($\text{m}\Omega$) TYP	Dimensions(mm)		
				Length(A)	Width(B)	Height(C)
UT30S76	10	650	80	50	28	52
UT30S77	10	1000	100	58	28	58
UT30S78	15	550	60	56	28	60
UT30S79	20	270	40	56	28	57

NOTE :

- For RoHS compliant products,
 - Ordering Code(Manufacturer Part Number): EX. TG-UT30S76
 - Solder: Sn/Cu
- Inductance at 50kHz, 1.0mV, 0Adc.

DIMENSIONS & SCHEMATICS

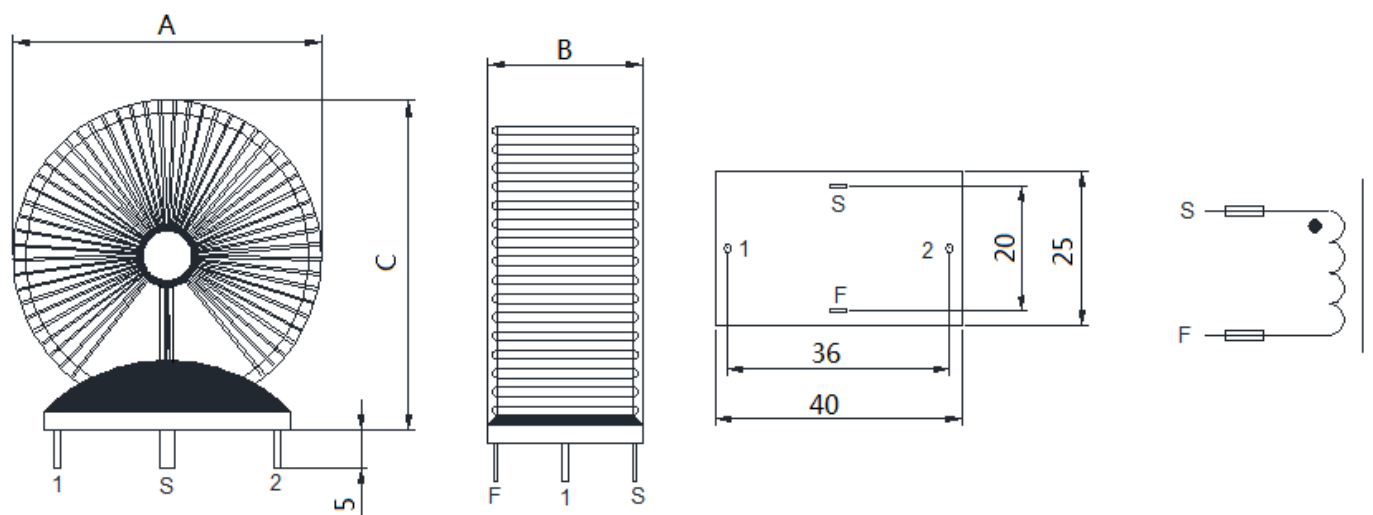

Green Product



DATA SHEET 24-30 FEB./25
1 OF 1



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec.com.tw> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C



ES France - Département Composants & Modules
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 89
Fax. 01 47 01 16 22



e-mail : comp@es-france.com
Site Web : www.es-france.com