

**DLF/DLH5505-B****55" TFT LCD, 1000 nits LED Backlight, 3840x2160**

The **DLF/DLH5505-B** is a 55 inch industrial grade sunlight readable LCD, with high brightness 1000 nits, it produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

Key Features

- High Brightness 1000 nits
- Sunlight Readable
- Wide Viewing Angle of 178°(H), 178°(V)
- LED Backlight
- Low Power Consumption
- BL MTBF: 50,000 hours

**Specifications**

Model Name	DLF/DLH5505-B
Description	55" TFT LCD, 1000nits LED Backlight, 3840x2160
Screen Size	55"
Display Area (mm)	1209.6(H) x 680.4(V)
Brightness	1000 cd/m ²
Resolution	3840x2160
Aspect Ratio	16:9
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.315(H) x 0.315 (V)
Pixel Pre Inch (PPI)	80
Viewing Angle	178°(H),178°(V)
Color Saturation (NTSC)	82%
Display Colors	1.07G (8bits + FRC)
Response Time (Typical)	8ms
Panel Interface	V-by-one
Input Interface	HDMI x 2, DP
Input Power	AC100~240V
Power Consumption	134W (139W With AD Board)
OSD Key	5 Keys (Power Switch, Menu, +, -, Exit)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	1232.4x 703.2x 30.8
Bezel Size(U/B/L/R)	11.4/11.4/11.4/11.4 mm
Weight (Net)	15kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.









Mechanical Drawing

Outline Dimensions

Unit:mm

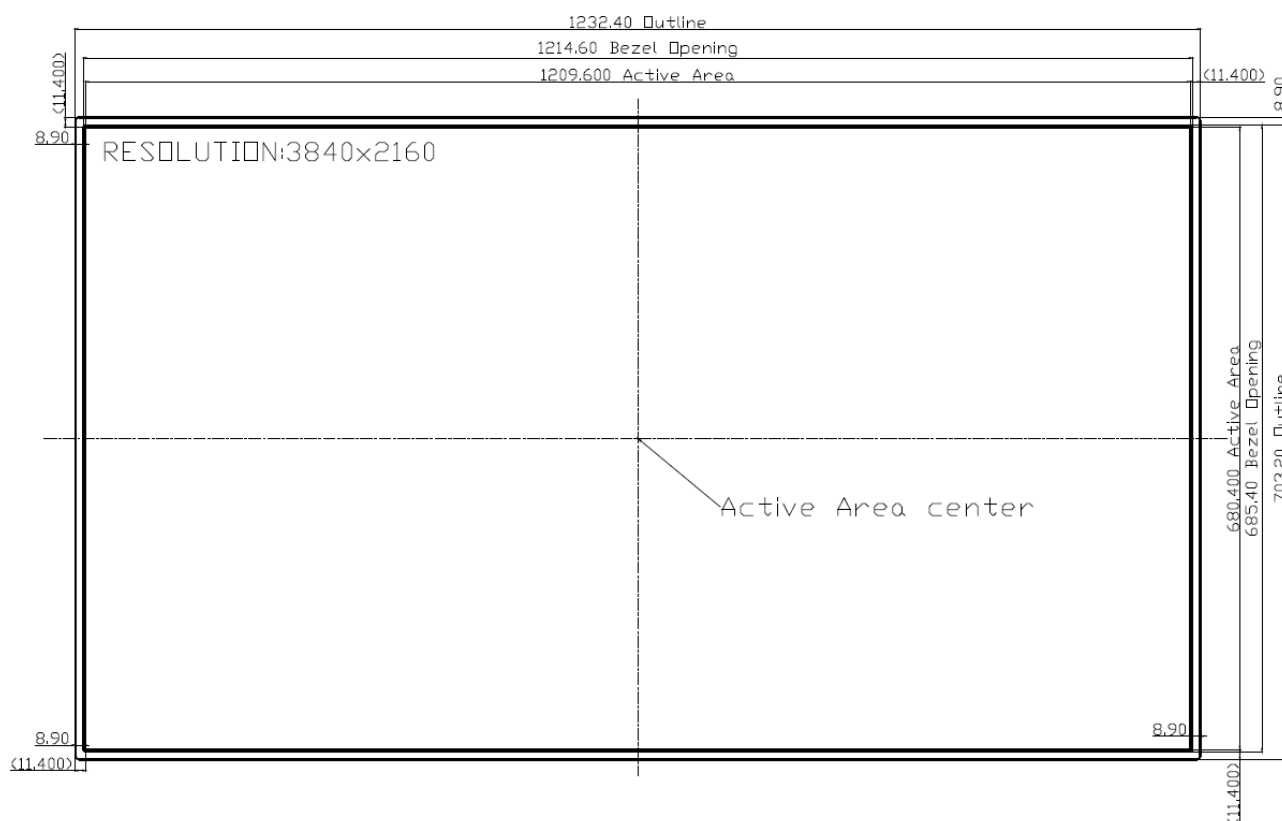

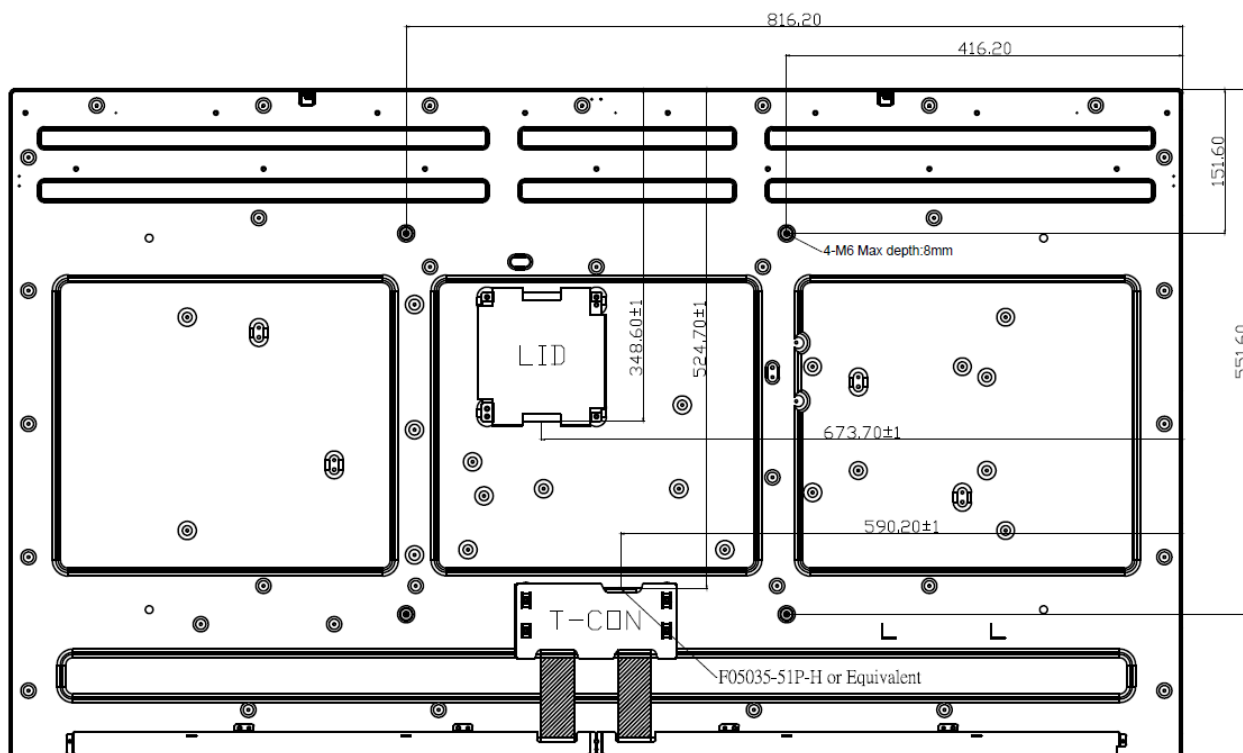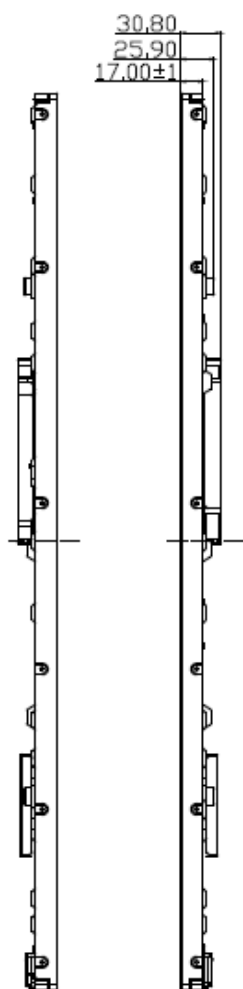



Note :

1. THE DIMENSION EXCLUDES DEFORMATION.
2. I/F CONNECTOR TO BE JAE FI-X30HL OR COMPATIBLE
3. M3 USER HOLE SCREW TORQUE 5.0 kgf- cm MAX.
- 4.M6 USER HOLE SCREW TORQUE 48.0 kgf- cm MAX.

Ordering Information

Part Number	Description
DLF5505-BNU-A11	55",1000nits,3840x2160,LID on LCM,2in1,V1
DLH5505-BNU-S11	55",1000nits,3840x2160,LID on LCM,AD68415HHP,AC100~240V,2in1,V1

Optional Accessories

Part Number	Description
810618301010	CABLE,POWER,AC,1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE,POWER,AC,1830mm UK type
810618301170	CABLE,POWER,AC,1830mm Australia type
810618301031	CABLE,POWER,AC,1830mm Japan type

Customer request

Touch	SCT (Single-Touch), PCT (Multi-Touch)
Glass	Tempered glass, AR coating.....

