



2.4mm Female PCB Mount with Round Contact
50GHz VSWR1.25, 0.210 Inches Hole Space with
0.059 Inches Hole Diameter, Through Hole

RF Connectors Technical Data Sheet

PE45932

Configuration

- 2.4mm Female Connector
- 50 Ohms
- Straight Body Geometry

Features

- Max. Operating Frequency 50 GHz
- Excellent VSWR of 1.25:1
- Gold Plated Beryllium Copper Contact

Applications

- General Purpose Test
- PCB Applications

Description

PE45932 2.4mm female PCB RF connector has a 50 Ohms impedance. Our 2.4mm female PCB connector provides a maximum frequency of 50 GHz. Our high-quality radio frequency coaxial connector is used for general purpose tests and printed circuit board applications. This 2.4mm female RF connector is stocked to be readily available for same business day shipment.

The Pasternack 2.4mm female PCB connector has a maximum VSWR of 1.25:1. The Pasternack 2.4mm PCB connector has a stainless steel body with gold plating. Our PE45932 2.4mm connector uses a gold plated-stainless steel outer conductor. Pasternack's 2.4mm female connector has a maximum operating voltage of 150 Vrms and a dielectric withstanding voltage of 500 Vrms.

Pasternack RF connector has a maximum inner conductor and outer conductor resistance of 4 mOhms and 2.5 mOhms respectively. The radio frequency connector is made from stainless steel material and has a contact life of 500 cycles or more. The Pasternack PE45932 2.4mm connector operates at a temperature range of -40 to +165 deg C. Our female RF connector with PCB termination has a 0.353 dB maximum insertion loss.

This Pasternack 2.4mm female connector will ship the same business day as purchased. Our 2.4mm female connector is part of RF, microwave, and millimeter wave components in stock for local, domestic, and international shipment. For further information on similar products, our expert technical support and trained sales team can get you the ideal RF connector as per your requirements.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		50	GHz
VSWR			1.25:1	
Insertion Loss			0.353	dB
Operating Voltage (AC)			150	Vrms
Impedance		50		Ohms
Dielectric Withstanding Voltage (AC)			500	Vrms
Inner Conductor DC Resistance			4	mOhms
Outer Conductor DC Resistance			2.5	mOhms
Insulation Resistance	5,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female PCB Mount with Round Contact 50GHz VSWR1.25, 0.210 Inches Hole Space with 0.059 Inches Hole Diameter, Through Hole PE45932](#)





2.4mm Female PCB Mount with Round Contact
50GHz VSWR1.25, 0.210 Inches Hole Space with
0.059 Inches Hole Diameter, Through Hole

RF Connectors Technical Data Sheet

PE45932

RF Leakage

100

dB

Mechanical Specifications

Size

Length	0.55 in [13.97 mm]
Width	0.25 in [6.35 mm]
Height	0.25 in [6.35 mm]
Weight	0.08 lbs [36.29 g]
Mating Cycles	500 Cycles
Mating Torque	9.74 to 15 in-lbs [1.10 to 1.70 Nm]
Cable Retention Force	4.5 lbs 2.04 kg

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PEI	
Outer Conductor	Stainless Steel	Gold
Body	Stainless Steel	Gold

Environmental Specifications

Temperature

Operating Range	-40 to +165 deg C
Humidity	MIL-STD-202, Method 106
Thermal Shock	MIL-STD-202, Method 107, Condition B
Salt Spray	MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female PCB Mount with Round Contact 50GHz VSWR1.25, 0.210 Inches Hole Space with 0.059 Inches Hole Diameter, Through Hole PE45932](#)





2.4mm Female PCB Mount with Round Contact
50GHz VSWR1.25, 0.210 Inches Hole Space with
0.059 Inches Hole Diameter, Through Hole

RF Connectors Technical Data Sheet

PE45932

2.4mm Female PCB Mount with Round Contact 50GHz VSWR1.25, 0.210 Inches Hole Space with 0.059 Inches Hole Diameter, Through Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female PCB Mount with Round Contact 50GHz VSWR1.25, 0.210 Inches Hole Space with 0.059 Inches Hole Diameter, Through Hole PE45932](https://www.pasternack.com/2.4mm-female-pcb-connector-pe45932-p.aspx)

URL: <https://www.pasternack.com/2.4mm-female-pcb-connector-pe45932-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.





PE45932 CAD Drawing

2.4mm Female PCB Mount with Round Contact 50GHz VSWR1.25,
0.210 Inches Hole Space with 0.059 Inches Hole Diameter, Through Hole

F E D C B A

1 2 3 4 5 6

REVISION			
ZONE	REV	DESCRIPTION	DATE
	A	INITIAL RELEASE	09/11/2023
		CHANGED BY	AGANWANI
		CHANGED BY	KGLEBOVA

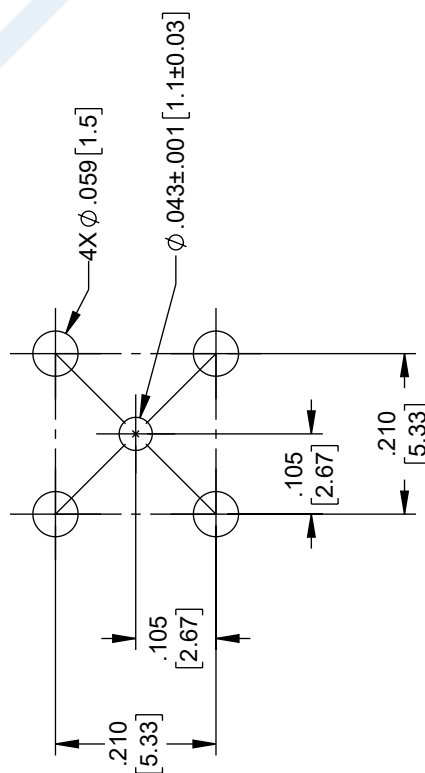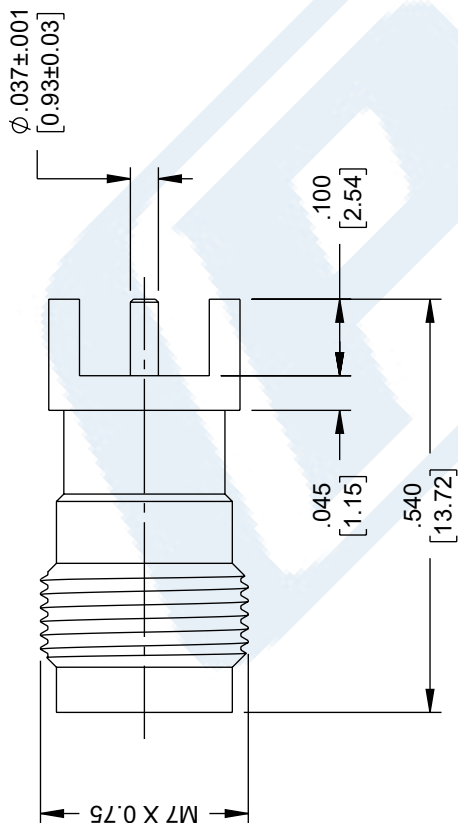

RECOMMENDED
MOUNTING PATTERN
FOR REFERENCE ONLY

INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. NO PART OF THIS DRAWING OR SOFTWARE MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM INFINITE ELECTRONICS, INC. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

PE PASTERNAK an INFINIT@ brand		
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
DESCRIPTION: 2.4 mm JACK PCB MOUNT WITH ROUND CONTACT 50 GHz VSWR1.25		
SIZE: A	CAGE CODE: 53919	DRAWN BY: KGLEBOVA
ITEM NO.: PE45932	REV: A	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE IN MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [0.5]
 .XXX = ±.005 [0.13]
 ANGLES ± 1°
 CABLE LENGTH TOLERANCES:
 <12 [305] = ±.1 [25] / -0
 >12 [305] ≤ 60 [1524] = ±.1 [25] / -0
 >60 [1524] ≤ 120 [3048] = ±.1 [25] / -0
 >120 [3048] ≤ 300 [7620] = ±.1 [25] / -0
 >300 [7620] = ±.1 [25] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS MAY VARY IN SIZE AND LOCATION. UNDIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com