


AI Accelerator& GPU Preliminary

MXM Module MX4000B-WA




Features

- NVIDIA® RTX PRO™ 4000 Blackwell Embedded GPU
- 7,680 CUDA cores, 60 RT cores and 240 Tensor cores, 16GB GDDR7 memory
- PCIe Gen 4 x16 interface via golden finger
- 33.75 TFLOPS peak FP32 performance

Specifications

Model Number	MX4000B-WA	
GPU Engine Specs	NVIDIA RTX PRO 4000 Blackwell Embedded GPU Architecture: NVIDIA Blackwell CUDA Cores: 7,680 Tensor Cores: 240 RT Cores: 60 Floating Point Performance: 26.04 TFLOPS Core Clock (MHz): Base= 975 / Boost= 1695	NVIDIA RTX PRO 4000 Blackwell Embedded GPU Architecture: NVIDIA Blackwell CUDA Cores: 7,680 Tensor Cores: 240 RT Cores: 60 Floating Point Performance: 33.75 TFLOPS Core Clock (MHz): Base= 1545 / Boost= 2197
Memory Specs	Size: 16GB GDDR7 Speed: 28 Gbps Interface Width: 256-bit Bandwidth (GB/sec): 896	
Feature Support	PCI Express 4.0 x16 DirectX: 12 Ultimate Open GL 4.6 Vulkan 1.2	
Display	Resolution: 7680x4320 ¹ Maximum resolution 8K@240Hz (7690x4320) Max: 4x DisplayPort 2.1a (DSC1.2a)	
Power Consumption	Total Graphics Power (TGP): 80 W @PWR_SRC 19V	Total Graphics Power (TGP): 115 W @PWR_SRC 19V
Form Factor	MXM Graphics Module Version 3.1, Type B	
Dimensions (WxD)	82.0 x 110.0 mm (3.22" x4.33")	
Net Weight	0.06 kg (0.1323 lb) (T.B.D.)	
Temperature	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F) / Extended Operating Temp. :-40 to + 70°C (T.B.D.) / Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F) / Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)
Humidity	40°C @ 95%, Non-condensing	
OS Support	Windows 10-64bit / Windows 11 / Linux 64-bit	
Certification	CE/FCC/UKCA	

System & Mounting Dimensions

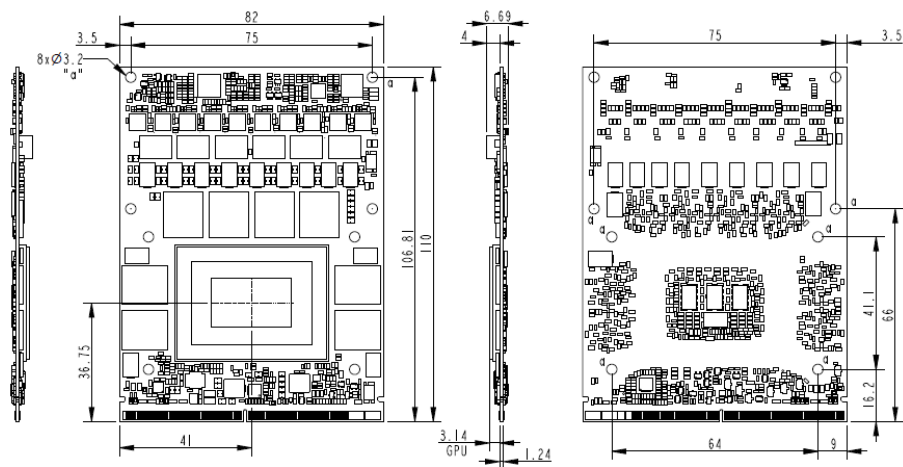

Product Specifications are subject to change without prior notice

Ordering Information

Model name	Description
MX4000B-WAA-A1	MXM-B, NVIDIA RTX PRO 4000 Blackwell, Gen4.0 x16, 16GB GDDR7, 4xDP, 115W, 0°C to +55°C
MX4000B-WAA-A2 (T.B.D.)	MXM-B, NVIDIA RTX PRO 4000 Blackwell, Gen4.0 x16, 16GB GDDR7, 4xDP, 80W, 0°C to +55°C

Accessory (Optional)

Part No.	Description
92-6MXM4H-1002	PCIe Carrier Board, MXM3.1, Gen4.0 x16, 4x HDMI, 0°C to +55°C
TBD	MXM-B Cooler, TWO BALL, 12V 4PIN