


AI Accelerator& GPU

MXM Module MX2000A-VA

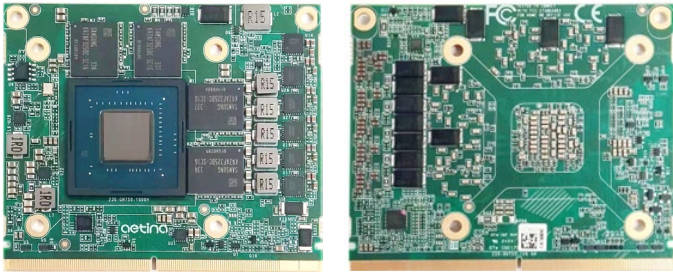


Features

- NVIDIA RTX 2000 Ada Generation Embedded GPU based on NVIDIA Ada Lovelace architecture
- 3072 CUDA cores, 24 RT cores and 96 Tensor cores, 8GB GDDR6 memory
- PCIe Gen 4 x16 interface via golden finger
- 12.99 TFLOPS peak FP32 performance

Specifications

Model Number	MX2000A-VA	
GPU Engine Specs	NVIDIA RTX 2000 Ada Generation Embedded GPU Architecture: NVIDIA Ada Lovelace CUDA Cores: 3072 Tensor Cores: 96 RT Cores: 24 Floating Point Performance: 8.94 TFLOPS Core Clock (MHz): Base= 930 / Boost= 1455	NVIDIA RTX 2000 Ada Generation Embedded GPU Architecture: NVIDIA Ada Lovelace CUDA Cores: 3072 Tensor Cores: 96 RT Cores: 24 Floating Point Performance: 12.99 TFLOPS Core Clock (MHz): Base= 1635 / Boost= 2115
Memory Specs	Size: 8GB GDDR6 Speed: 16 Gbps Interface Width: 128-bit Bandwidth (GB/sec): 256	
Feature Support	PCI Express 4.0 x8 DirectX: 12 Ultimate Open GL 4.6 Vulkan 1.2	
Display	Resolution: 7680x4320 ¹ Max: 3x DisplayPort 1.4a	
Power Consumption	Total Graphics Power (TGP): 35 W	Total Graphics Power (TGP): 60 W
Form Factor	MXM Graphics Module Version 3.1, Type A	
Dimensions (WxD)	82.0 x 70.0 mm (3.22" x2.75")	
Net Weight	0.037 kg (0.082 lb)	
Temperature	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F)/ Extended Operating Temp. : -40 to + 85°C (-40°F ~185°F)/ Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)	
Humidity	40°C @ 95%, Non-condensing	
OS Support	Windows 10/11 64-bit / Linux 64-bit	
Certification	CE/FCC/UKCA	

System & Mounting Dimensions

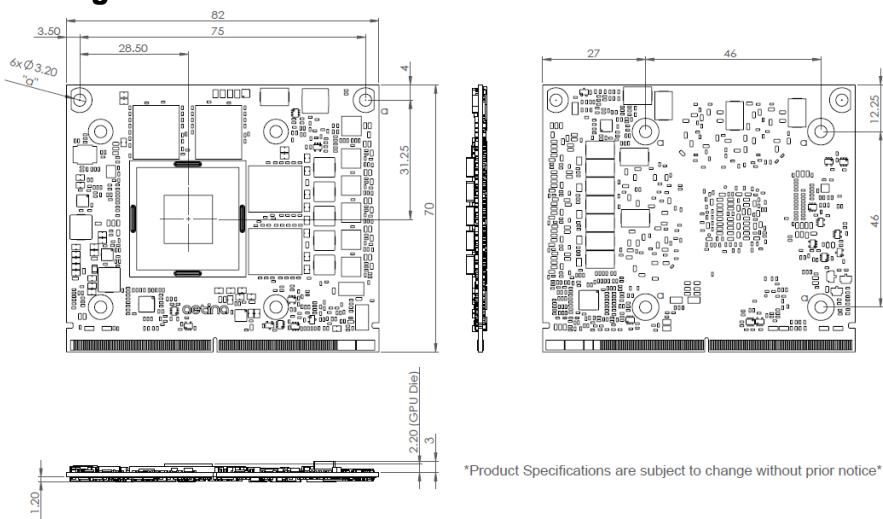

Ordering Information

Model name	Description
MX2000A-VAA-A1	MXM-A, NVIDIA RTX 2000 ADA, Gen4.0 x8, 8GB GDDR6, 3xDP, 60W, 0°C to +55°C
MX2000A-VAA-A2	MXM-A, NVIDIA RTX 2000 ADA, Gen4.0 x8, 8GB GDDR6, 3xDP, 35W, 0°C to +55°C
MX2000A-VAW-A1	MXM-A, NVIDIA RTX 2000 ADA, Gen4.0 x8, 8GB GDDR6, 3xDP, 60W, -40°C to +85°C
MX2000A-VAW-A2	MXM-A, NVIDIA RTX 2000 ADA, Gen4.0 x8, 8GB GDDR6, 3xDP, 35W, -40°C to +85°C
MX2000A-VAX-A1	MXM-A, NVIDIA RTX 2000 ADA, Gen4.0 x8, 8GB GDDR6, 3xDP, 60W, Coating, -40°C to +85°C

Accessory (Optional)

Part No.	Description
92-6MXM4H-1002	PCIe Carrier Board, MXM3.1, Gen4.0 x16, 4x HDMI, 0°C to +55°C
3906000000S010	MXM-A Cooler, TWO BALL, 12V 4PIN, L:200mm 6000RPM, 72*62*27.65mm, AL6063, 0°C to +55°C