



AI Accelerator & GPU

MXM Module MX3500A-SA



Features


- NVIDIA RTX 3500 Ada Generation Embedded GPU based on NVIDIA Ada Lovelace architecture
- 5120 CUDA cores, 40 RT cores and 160 Tensor cores, 12GB GDDR6 memory
- PCIe Gen 4 x16 interface
- 23.04 TFLOPS peak FP32 performance
- Support Error Correction Code(ECC)

Specifications

Model Number	MX3500A-SA	
GPU Engine Specs	NVIDIA RTX 3500 Ada Generation Embedded GPU Architecture: NVIDIA Ada Lovelace CUDA Cores: 5120 Tensor Cores: 160 RT Cores: 40 Floating Point Performance: 20.42 TFLOPS Core Clock (MHz): Base= 1470 / Boost= 1995	NVIDIA RTX 3500 Ada Generation Embedded GPU Architecture: NVIDIA Ada Lovelace CUDA Cores: 5120 Tensor Cores: 160 RT Cores: 40 Floating Point Performance: 23.04 TFLOPS Core Clock (MHz): Base= 1725 / Boost= 2250
Memory Specs	Size: 12GB GDDR6 Speed: 18 Gbps Interface Width: 192-bit Bandwidth (GB/sec): 432	
Feature Support	PCI Express 4.0 x16 DirectX: 12 Ultimate Open GL 4.6 Vulkan 1.2	
Display	Resolution: 7680x4320 ¹ Max: 4x DisplayPort 1.4a	
Power Consumption	Total Graphics Power (TGP): 80 W	Total Graphics Power (TGP): 115 W
Form Factor	MXM Graphics Module Version 3.1, Type B	
Dimensions (WxD)	82.0 x 105.0 mm (3.22" x4.13")	
Net Weight	0.0592 kg (0.1305 lb)	
Temperature	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F) / Extended Operating Temp. :-40 to + 70°C (-40°F ~158°F) / Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F) / Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)
Humidity	40°C @ 95%, Non-condensing	
OS Support	Windows 10/11 64-bit / Linux 64-bit	
Certification	CE/FCC/UKCA	



System & Mounting Dimensions

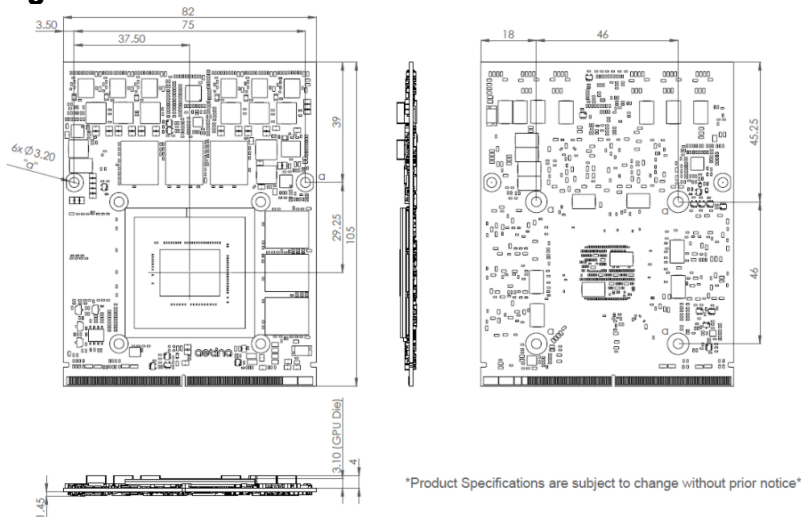

Ordering Information

Model name	Description
MX3500A-SAA-A1	MXM-B, NVIDIA RTX 3500 ADA, Gen4.0 x16, 12GB GDDR6, DP, 115W, 0°C to +55°C
MX3500A-SAA-A2	MXM-B, NVIDIA RTX 3500 ADA, Gen4.0 x16, 12GB GDDR6, DP, 80W, 0°C to +55°C
MX3500A-SAG-A1	MXM-B, NVIDIA RTX 3500 ADA, Gen4.0 x16, 12GB GDDR6, DP, 80W, -40°C to +70°C

Accessory (Optional)

Part No.	Description
92-6MXM4H-1002	PCIe Carrier Board, MXM3.1, Gen4.0 x16, 4x HDMI, 0°C to +55°C
3904000000T000	MXM-B Cooler, TWO BALL, 12V 4PIN P2.5mm, L:250mm 7000RPM, 107*80.7*32.4mm, AL1100, 0°C to +55°C