

Vertical SMD Type, Low Impedance Capacitors

For LCD MT/TV

Guaranteed 2000 hours at 105°C

RoHS compliant

Halogen-free




Specifications

No.	Item	Performance					
1	Temperature range(°C)	-40 to +105					
2	Rated Voltage Range	6.3-35VDC					
3	Leakage current (µA)	Rated Voltage (VDC)	6.3-35				
		$1 \leq 0.01CV$ or $3\mu A$, whichever is greater (at 20°C, 2minutes)					
4	Capacitance tolerance (%)	± 20 (20°C, 120Hz)					
5	Tangent of the loss angle (Tan δ)	Rated voltage(V)	6.3	10	16	25	35
		Tanδ(max)	0.30	0.26	0.22	0.16	0.13
		0.02 is added to each 1000uF increase over 1000uF (20°C, 120Hz)					
6	Low temperature characteristics Impedance ratio (max)	Rated voltage(V)	6.3	10	16	25	35
		$Z(-25^{\circ}C)/Z(+20^{\circ}C)$	2	2	2	2	2
		$Z(-40^{\circ}C)/Z(+20^{\circ}C)$	3	3	3	3	3
7	Endurance (105°C) (Applied ripple current)	Test time	The following specifications shall be satisfied when the capacitors are restores to 20°C after the rated voltage is applied for 2,000 hours at 105°C				
		Rated Voltage(VDC)	6.3-35				
		Leakage current	The initial specified value or less				
		Percentage of capacitance change	Within $\pm 30\%$ of initial value				
		Tangent of the loss angle	300% or less of the initial specified value				
8	Shelf life (105°C)	Test time	The following specifications shall be satisfied when the capacitors are restores to 20°C after exposing them for 1000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum for 30 minutes, at least 24 hours and not more than 48 hours before the measurements.				
		Rated Voltage(VDC)	6.3-35				
		Leakage current	The initial specified value or less				
		Percentage of capacitance change	Within $\pm 30\%$ of initial value				
		Tangent of the loss angle	300% or less of the initial specified value				



Dimensions

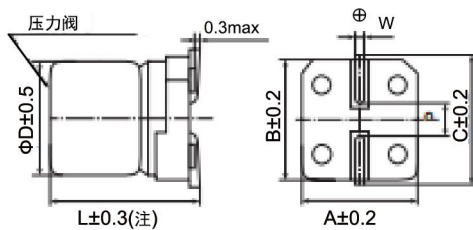


: Dummy terminals

Note1: $L \pm 0.5$ for 8x7 (F070)-10x10.5 (G105)

Case Code	D	L	A	B	C	W	P
B057	4	5.7	4.3	4.3	5.1	0.5-0.8	1.0
C057	5	5.7	5.3	5.3	5.9	0.5-0.8	1.4
E057	6.3	5.7	6.6	6.6	7.2	0.5-0.8	1.9
E077	6.3	7.7	6.6	6.6	7.2	0.5-0.8	1.9
F105	8	10.5	8.3	8.3	9.0	0.7-1.1	3.1
G105	10	10.5	10.3	10.3	11.0	0.7-1.1	4.7

Marking

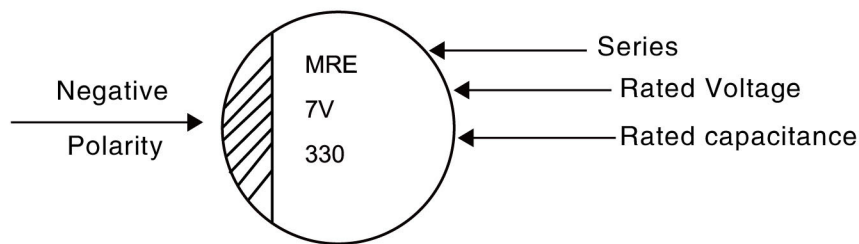

Coefficient of Frequency for Ripple Current

capacitance(uF)	Frequency (Hz)			
	120	1K	10K	100K
10 to 150	0.40	0.75	0.90	1.0
220 to 470	0.50	0.85	0.94	1.0
820 to 1000	0.60	0.87	0.95	1.0

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.



DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: Φ DXL(mm)
Ripple Current: mA/rms at 100KHz, 105°C

μ F	V.DC Contents	6.3V			10V			16V			25V		
		Φ DXL	Impedance Ω /100KHz 20°C	Ripple Current (mA/rms, 105°C)	Φ DXL	Impedance Ω /100KHz 20°C	Ripple Current (mA/rms, 105°C)	Φ DXL	Impedance Ω /100KHz 20°C	Ripple Current (mA/rms, 105°C)	Φ DXL	Impedance Ω /100KHz 20°C	Ripple Current (mA/rms, 105°C)
10										4X5.7	1.93	90	
22		4X5.7	1.93	90	4X5.7	1.93	90	4X5.7	1.93	90	5X5.7	1.0	150
33		4X5.7	1.93	90	5X5.7	1.0	150	5X5.7	1.0	150	6.3X5.7	0.52	200
47		5X5.7	1.0	150	6.3X5.7	0.52	180	6.3X5.7	0.52	200	6.3X5.7	0.52	200
100		6.3X5.7	0.52	200	6.3X5.7	0.52	200	6.3X5.7	0.52	200	6.3X7.7	0.34	230
150		6.3X7.7	0.30	230	6.3X7.7	0.34	230	6.3X7.7	0.34	230	8X10.5	0.16	400
220		6.3X7.7	0.30	230	6.3X7.7	0.34	230	6.3X7.7	0.34	230	8X10.5	0.16	400
330		6.3X7.7	0.30	230	8X10.5	0.16	400	8X10.5	0.16	400	8X10.5	0.16	400
470		8X10.5	0.16	400	8X10.5	0.16	400	10X10.5	0.16	600	10X10.5	0.08	600
820		10X10.5	0.16	600	10X10.5	0.08	600						
1000		10X10.5	0.08	600									

μ F	V.DC Contents	35V		
		Φ DXL	Impedance Ω /100KHz 20°C	Ripple Current (mA/rms, 105°C)
22		5X5.7	1.0	150
33		6.3X5.7	0.52	200
47		6.3X5.7	0.52	200
100		6.3X7.7	0.16	230
150		8X10.5	0.16	400
220		10X10.5	0.16	600

