

# LED-Framed Touchmonitors

Touch

## OTL245 23.8"

16:9 Native Resolution 1920 x 1080

OML245-R03000-0P2F20-1.0

OTL245-RC5000-UP2F20-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O          |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|----------------|
| 250              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 8           | 30W                     | VGA / DVI / DP |

Dimensions(mm)(w) x (H) x (D) 583.2 x 341.25 x 50.1

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL275 27"

16:9 Native Resolution 1920 x 1080

OML275-R03000-0P3F20-1.0

OTL275-RC5000-UP3F20-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O          |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|----------------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 11          | 36W                     | VGA / DVI / DP |

Dimensions(mm)(w) x (H) x (D) 640.0 x 385.1 x 52.5

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL27H 27"

16:9 Native Resolution 1920 x 1080

OML27H-L03000-0D3F20-1.0

OTL27H-LC5000-UD3F20-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9.2         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 637.0 x 365.5 x 52.2

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL27H 27"

16:9 Native Resolution 1920 x 1080

OML27H-L03000-0D3F30-1.0

OTL27H-LC5000-UD3F30-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9.2         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 637.0 x 372.5 x 52.2

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL27H 27"

16:9 Native Resolution 1920 x 1080

OML27H-L03000-0D3F40-1.0

OTL27H-LC5000-UD3F40-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9.2         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 637.0 x 380.8 x 52.2

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL32H 32"

16:9 Native Resolution 1920 x 1080

OML32H-L03000-0D4F20-1.0

OTL32H-LC5000-UD4F20-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 13          | 80W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 743.0 x 427.9 x 58.0

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL32H 32"

16:9 Native Resolution 1920 x 1080

OML32H-L03000-0D4F30-1.0

OTL32H-LC5000-UD4F30-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 13.5        | 80W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 743.0 x 434.8 x 58.0

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL32H 32"

16:9 Native Resolution  
1920 × 1080

OML32H-L03000-0D4F40-1.0

OTL32H-LC5000-UD4F40-1.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 13.5        | 80W                     | HDMI / DP |

Dimensions(mm)(w) × (H) × (D) 743.0 × 441.8 × 58.0

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL227 21.5"

16:9 Native Resolution  
1920 × 1080

OML227-L03000-0D5F40-1.0

OTL227-LC5000-UD5F40-1.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 500              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 7           | 25W                     | HDMI / DP |

Dimensions(mm)(w) × (H) × (D) 546.0 × 342.0 × 54.5

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA / UL



## OTL247 23.8"

16:9 Native Resolution  
1920 × 1080

OML247-R03000-0P2F50-3.0

OTL247-RC5000-UP2F50-3.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O          |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|----------------|
| 250              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 8           | 30W                     | VGA / DVI / DP |

Dimensions(mm)(w) × (H) × (D) 591.0 × 367.0 × 54.5

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL277 27"

16:9 Native Resolution  
1920 × 1080

OML277-R03000-0P3F50-3.0

OTL277-RC5000-UP3F50-3.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O          |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|----------------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9           | 30W                     | VGA / DVI / DP |

Dimensions(mm)(w) × (H) × (D) 660.0 × 404.0 × 54.4

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OBL277 27" Super narrow border, Optical Bonding

16:9 Native Resolution  
1920 × 1080

ONL277-L03000-0D4F20-1.0

OBL277-LC4000-UD4F20-1.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9           | 36W                     | HDMI / DP |

Dimensions(mm)(w) × (H) × (D) 628.0 × 360.3 × 57.8

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL327 32"

16:9 Native Resolution  
1920 × 1080

OML327-R03000-0P4F50-2.0

OTL327-RC5000-UP4F50-2.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O          |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|----------------|
| 400              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 15          | 60W                     | VGA / DVI / DP |

Dimensions(mm)(w) × (H) × (D) 765.9 × 466.5 × 64.6

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OBL277 27" Super narrow border, Optical Bonding

16:9 Native Resolution  
1920 × 1080

ONL277-L03000-0D4F30-1.0

OBL277-LC4000-UD4F30-1.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9           | 36W                     | HDMI / DP |

Dimensions(mm)(w) × (H) × (D) 628.0 × 367.8 × 57.8

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTL437 43" 4K

16:9 Native Resolution  
3840 × 2160

OML437-L04000-0D5U40-1.0

OTL437-LC6000-UD5U40-1.0

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|------------------|
| 500              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 20          | 100W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) × (H) × (D) 987.2 × 575.5 × 64.2

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



**OTL497** 49" 4K

16:9 Native Resolution 3840 x 2160

**OML497-L04000-0D5U40-1.2**  
**OTL497-LC5000-UD5U40-1.2**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|------------------|
| 600              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 32          | 110W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 1124.0 x 655.0 x 67.0

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UL / UKCA



**OTL557** 55" 4K

16:9 Native Resolution 3840 x 2160

**OML557-L04000-0D8U40-1.0**  
**OTL557-LC5000-UD8U40-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|------------------|
| 600              | 1200 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 39          | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 1262.0 x 733.0 x 68.0

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTR245** 23.6"

1:1 Native Resolution 1280 x 1280

**OMR245-R03000-0DBT00-1.0**  
**OTR245-RC4000-UDBT00-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 1500             | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 11.9        | 100W                    | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 674.6 x 674.6 x 55.6

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTR247** 23.6"

1:1 Native Resolution 1280 x 1280

**OMR247-R03000-0DBT40-1.0**  
**OTR247-RC4000-UDBT40-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 1500             | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 12.8        | 100W                    | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 690.0 x 690.0 x 55.6

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OML24D** 23.8"

16:9 Native Resolution 1920 x 1080

**OML24D-R02000-0D2F40-2.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|------------------|
| 250              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 11          | 90W                     | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 350.1 x 918.5 x 40.0

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OML27D** 27"

16:9 Native Resolution 1920 x 1080

**OML27D-R02000-0D3F40-2.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|------------------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 13          | 90W                     | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 384.0 x 990.0 x 45.0

3 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTC245** 23.6" / R1500

16:9 Native Resolution 1920 x 1080

**OTC245-RC5000-UD3200-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 3000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 6.6         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 564.0 x 335.2 x 64.3

1 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTC275** 27" / R1500

16:9 Native Resolution 1920 x 1080

**OTC275-RC5000-UD3200-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 500              | 3000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9           | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 638.2 x 376.6 x 68.5

1 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTC247** 23.6" / R1500

16:9 Native Resolution 1920 x 1080

**OTC247-RC5000-UD3230-1.0**

Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 3000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 7.8         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 602.0 x 369.8 x 66.8

1 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA



**OTC277** 27" / R1500

16:9 Native Resolution 1920 x 1080

**OTC277-RC5000-UD3230-1.0**


Multi-Touch **ZB** **PCAP**

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Surface Treatment | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-------------------|-----------------|-------------|-------------------------|-----------|
| 500              | 3000 : 1       | 89° / 89° / 89° / 89°   | AG (Optional)     | USB             | 9.5         | 36W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 677.2 x 408.0 x 70.9

1 Year Warranty **RoHS**

Agency Approvals: FCC / CE / UKCA

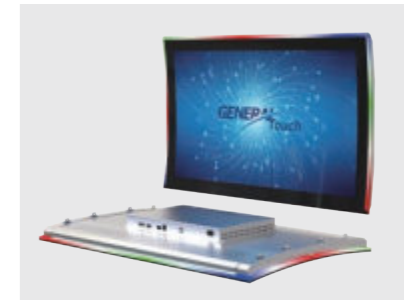

## OTC32H 32" / R1500

16:9 Native Resolution  
1920 x 1080

### OTC32H-LC5000-UD4F40-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 3000 : 1       | 89° / 89° / 89° / 89°   | USB             | 11.8        | 50W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 467.6 x 762.5 x 100.8

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC327 32" / R1500

16:9 Native Resolution  
1920 x 1080

### OTC327-LC5000-UD4F40-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 3000 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 50W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 462.0 x 764.9 x 100.1

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC437 43" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTC437-LC5000-UD5440-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 500              | 1200 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 100W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 585.4 x 980.6 x 140.7

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTJ437 43" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTJ437-LC5000-UD5440-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 500              | 1200 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 100W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 585.4 x 992.9 x 140.0

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC497 49" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTC497-LC5000-UD5440-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 2000 : 1       | 89° / 89° / 89° / 89°   | USB             | 28          | 130W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 660.0 x 1105.9 x 162.8

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTJ497 49" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTJ497-LC5000-UD5440-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 2000 : 1       | 89° / 89° / 89° / 89°   | USB             | 28          | 130W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 660.0 x 1121.9 x 160.1

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC557 55" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTC557-RC5000-UD5440-2.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 34          | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 768.9 x 1270.6 x 206.1

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTJ557 55" / R1500 4K

16:9 Native Resolution  
3840 x 2160

### OTJ557-RC5000-UD5440-2.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 34          | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 769.0 x 1279.6 x 200.8

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTJ557 55" / R800 4K

16:9 Native Resolution  
3840 x 2160

### OTJ557-RC5000-UD5450-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 34          | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 748.0 x 1235.7 x 311.1

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTS557 55" / R1000 & R1200 4K

16:9 Native Resolution  
3840 x 2160

### OTS557-RC5000-UD5440-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 751.0 x 1243.7 x 323.5

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTC323 32" / R1500

16:9 Native Resolution  
1920 x 1080

### OTC323-LC5000-UD4F00-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 3000 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 50W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 450.0 x 744.8 x 99.2

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC325 32" / R1500

16:9 Native Resolution  
1920 x 1080

### OTC325-LC5000-UD4F00-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 3000 : 1       | 89° / 89° / 89° / 89°   | USB             | 11.8        | 50W                     | HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 450.0 x 744.8 x 99.2

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC435 43" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTC435-LC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 500              | 1200 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 100W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 574.4 x 979.2 x 138.4

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTJ435 43" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTJ435-LC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 500              | 1200 : 1       | 89° / 89° / 89° / 89°   | USB             | TBD         | 100W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 574.4 x 981.2 x 138.4

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC495 49" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTC495-LC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 2000 : 1       | 89° / 89° / 89° / 89°   | USB             | 27          | 130W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 649.0 x 1103.0 x 160.4

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTJ495 49" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTJ495-LC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 2000 : 1       | 89° / 89° / 89° / 89°   | USB             | 27          | 130W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 649.0 x 1112.5 x 158.4

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



## OTC555 55" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTC555-RC5000-UD5400-2.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 33.6        | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 732.4 x 1245.6 x 201.3

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTJ555 55" / R1500

4K

16:9 Native Resolution  
3840 x 2160

### OTJ555-RC5000-UD5400-2.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 33.6        | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 732.0 x 1261.8 x 196.0

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTJ555 55" / R800

4K

16:9 Native Resolution  
3840 x 2160

### OTJ555-RC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O            |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|------------------|
| 550              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 32          | 150W                    | HDMI / HDMI / DP |

Dimensions(mm)(w) x (H) x (D) 720.0 x 1222.4 x 302.5

1 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTV275 27" \*2

16:9 Native Resolution  
1920 x 1080

### OTV275-RC5000-UD3F00-1.0


Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 1000 : 1       | 89° / 89° / 89° / 89°   | USB             | 25          | 60W                     | HDMI / DP |
| 300              | 1000 : 1       |                         |                 |             |                         |           |

Dimensions(mm)(w) x (H) x (D) 698.1 x 624.0 x 219.1

3 Year Warranty RoHS

Agency Approvals: FCC / CE

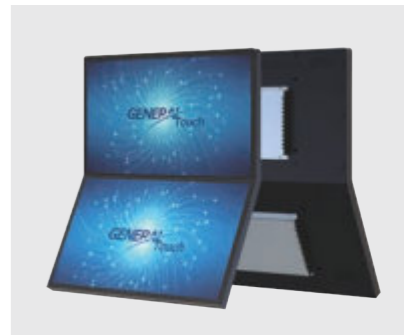

## OTG277 27" + 27" C / R1500

16:9 Native Resolution  
1920 × 1080

### OTG277-RC5000-UD3220-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 300              | 3000 : 1       | 89° / 89° / 89° / 89°   | USB             | 26          | 60W                     | HDMI / DP |
| 500              | 3000 : 1       |                         |                 |             |                         |           |

Dimensions(mm)(w) × (H) × (D) 729.6 × 656.6 × 149.0

1 Year Warranty RoHS

Agency Approvals: FCC / CE



## OTG327 32" + 32" C / R1500

16:9 Native Resolution  
1920 × 1080

### OTG327-RC5000-UD4220-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 4000 : 1       | 89° / 89° / 89° / 89°   | USB             | 29          | 120W                    | HDMI / DP |
| 450              | 3000 : 1       |                         |                 |             |                         |           |

Dimensions(mm)(w) × (H) × (D) 842.1 × 759.4 × 182.1

1 Year Warranty RoHS

Agency Approvals: FCC / CE



## OTG555 32" + 55" C / R1000

16:9 Native Resolution  
3840 × 2160

### OTG555-RC5000-UD5400-1.0

Multi-Touch ZB PCAP

| Luminance (nits) | Contrast Ratio | Viewing Angle (L/R/U/D) | Touch Interface | Weight (Kg) | Power Consumption (Typ) | I / O     |
|------------------|----------------|-------------------------|-----------------|-------------|-------------------------|-----------|
| 400              | 1200 : 1       | 89° / 89° / 89° / 89°   | USB             | 44          | 210W                    | HDMI / DP |
| 500              | 4000 : 1       |                         |                 |             |                         |           |

Dimensions(mm)(w) × (H) × (D) 739.2 × 1546.8 × 504.5

1 Year Warranty RoHS

Agency Approvals: FCC / CE

