


# Open Frame Touchmonitors

Touch

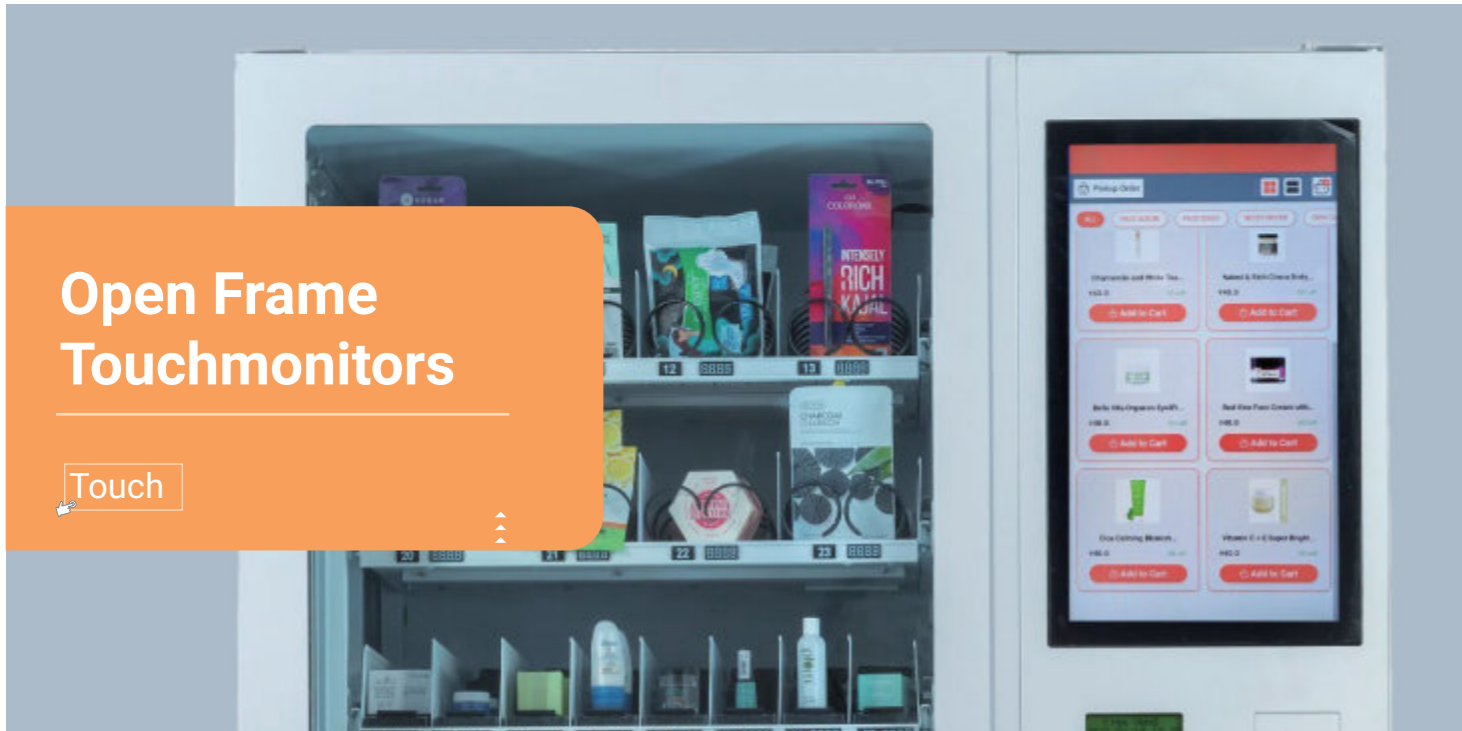

## OTL15S 15"

4:3 Native Resolution 1024 x 768

### OTL15S-RE3000-CH3A00-1.0

Multi-Touch 5-Wire Resistive

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	2500 : 1	88° / 88° / 88° / 88°	Haze 8%±3%	USB & RS232	4.8	15W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 354.7 x 278.7 x 46.0 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL17S 17"

5:4 Native Resolution 1280 x 1024

### OTL17S-RE3000-CC2A00-1.1

Multi-Touch 5-Wire Resistive

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	Haze 8%±3%	USB & RS232	5.6	17W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 379.0 x 317.0 x 40.0 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL223 21.5"

16:9 Native Resolution 1920 x 1080

### OTL223-RE3000-CH2200-2.0

Multi-Touch 5-Wire Resistive

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	Haze 8%±3%	USB & RS232	5.9	22W	VGA / DVI / HDMI

Dimensions(mm)(w) x (H) x (D) 515.6 x 312.2 x 57.5 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL15S 15"

4:3 Native Resolution 1024 x 768

### OTL15S-RS4P00-CC3A00-1.1

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	2500 : 1	88° / 88° / 88° / 88°	AG (Optional)	USB & RS232	4.5	25W	VGA

Dimensions(mm)(w) x (H) x (D) 345.9 x 269.9 x 38.7 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL17S 17"

5:4 Native Resolution 1280 x 1024


### OTL17S-RS4P00-CC2A00-2.0

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB & RS232	6	25W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 383.5 x 315.5 x 44.5 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA

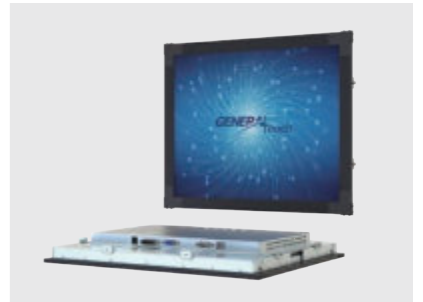

## OTL19S 19"

5:4 Native Resolution 1280 x 1024

### OTL19S-RS4P00-CC2A00-1.2

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB & RS232	6	25W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 427.5 x 351.5 x 48.2 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL10S 9.7"

4:3 Native Resolution 1024 x 768

### OTL10S-RC4000-UH3A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	500 : 1	70° / 70° / 65° / 65°	AG (Optional)	USB	3.46	11W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 237.0 x 184.0 x 34.9 3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL10S 10.4"

4:3 Native Resolution 1024 x 768

### OTL10S-RC6000-UD3A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	900 : 1	75° / 75° / 75° / 75°	AG (Optional)	USB	3.46	14W	HDMI / DP

Dimensions(mm)(w) x (H) x (D) 261.4 x 202.3 x 41.9 3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL15S 15"

4:3 Native Resolution  
1024 x 768

### OTL15S-RC3000-UC3A00-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	2500 : 1	88° / 88° / 88° / 88°	AG (Optional)	USB	3.46	15W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 350.0 x 274.2 x 44.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL103 10"

16:10 Native Resolution  
1280 x 800

### OTL103-RC6000-UD4A00-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	900 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3	14W	HDMI / DP

Dimensions(mm)(w) x (H) x (D) 257.0 x 176.0 x 44.7

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL17S 17"

5:4 Native Resolution  
1280 x 1024

### OTL17S-RC3000-UC2A00-1.1

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB	3.75	18W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 384.3 x 316.3 x 41.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL123 12"

16:10 Native Resolution  
1280 x 800

### OTL123-RC6000-UD4A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
450	1000 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3	15W	HDMI / DP

Dimensions(mm)(w) x (H) x (D) 304.0 x 210.0 x 45.1

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL19S 19"

5:4 Native Resolution  
1280 x 1024

### OTL19S-RC3000-UC2A00-1.1

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB	4.25	20W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 438.7 x 363.7 x 41.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL133 13.3"

16:9 Native Resolution  
1920 x 1080

### OTL133-RC6000-UH6200-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
600	800 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3.46	12W	HDMI / VGA

Dimensions(mm)(w) x (H) x (D) 328.0 x 213.0 x 41.5

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL073 7"

16:10 Native Resolution  
1280 x 800

### OTL073-RC3000-UH4A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	800 : 1	88° / 88° / 88° / 88°	AG (Optional)	USB	1.46	14W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 190.6 x 154.6 x 48.0

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL133 13.3"

16:9 Native Resolution  
1920 x 1080

### OTL133-RC6000-UP6200-2.1

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
600	800 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3.46	12W	VGA / DP

Dimensions(mm)(w) x (H) x (D) 328.0 x 213.0 x 41.5

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL103 10"

16:10 Native Resolution  
1280 x 800

### OTL103-RC3000-UC4A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	900 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3	14W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 263.0 x 181.0 x 43.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL153 15.6"

16:9 Native Resolution  
1920 x 1080

### OTL153-RC3C00-UH4200-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	1200 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	3.46	18W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 382.0 x 249.2 x 47.5

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL153 15.6"

16:9 Native Resolution  
1920 x 1080

### OTL153-RC6000-UD3F00-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	800 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	3.46	18W	VGA / DP

Dimensions(mm)(w) x (H) x (D) 391.4 x 243.5 x 49.2

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL246 23.8"

16:9 Native Resolution  
1920 x 1080

### OTL246-RC6000-UH4200-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	6.5	28W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 569.2 x 341.3 x 42.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL193 18.5"

16:9 Native Resolution  
1366 x 768

### OTL193-RC5000-UH2100-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB	4.1	18W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 452.9 x 273.5 x 46.5

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL276 27"

16:9 Native Resolution  
1920 x 1080

### OTL276-RC5000-UH4200-3.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	7.35	28W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 652.2 x 396.4 x 43.3

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL223 21.5"

16:9 Native Resolution  
1920 x 1080

### OTL223-RC3000-UH2F00-2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	5.5	20W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 541.0 x 328.0 x 41.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL326 32"

16:9 Native Resolution  
1920 x 1080

### OTL326-RC4000-UH4F00-1.1

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	1200 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	13.6	60W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 757.1 x 450.6 x 45.1

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL22W 21.5"

16:9 Native Resolution  
1920 x 1080

### OTL22W-RPC03-Z V2.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	5.5	20W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 541.0 x 328.0 x 41.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



## OTL436 43"

16:9 Native Resolution  
1920 x 1080

### OTL436-RC5000-UD4F00-1.1

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	1200 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	24.2	80W	VGA / DVI HDMI / DP

Dimensions(mm)(w) x (H) x (D) 1021.0 x 608.7 x 54.2

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UKCA



## OTL22W 21.5"

16:9 Native Resolution  
1920 x 1080

### OTL22W-RPC03-HZ V2.5

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	5.5	20W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 541.0 x 328.0 x 41.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA

