



Rear Mount Touchmonitors

Touch

RTL15S 15"

4:3 Native Resolution 1024 x 768

RTL15S-RS6000-CC3A00-2.2

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	2500 : 1	88° / 88° / 88° / 88°	AG (Optional)	USB & RS232	4.5	25W	VGA

Dimensions(mm)(w) x (H) x (D) 336.0 x 264.0 x 43.8

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL17S 17"

5:4 Native Resolution 1280 x 1024

RTL17S-RS4000-CC2A00-2.0

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB & RS232	6	25W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 368.1 x 306.0 x 48.8

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL19S 19"

5:4 Native Resolution 1280 x 1024

RTL19S-RS6000-CC2A00-2.0


SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB & RS232	7	25W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 414.7 x 342.7 x 54.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA

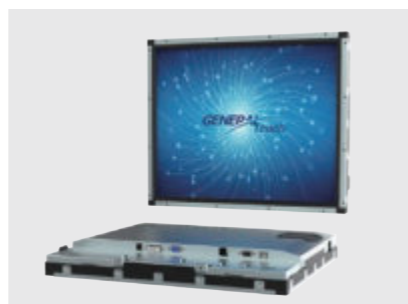

RTL153 15.6"

16:9 Native Resolution 1920 x 1080

RTL153-RS4000-CH4200-1.0

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	800 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB & RS232	4.5	25W	VGA / HDMI

Dimensions(mm)(w) x (H) x (D) 376.8 x 221.1 x 50.0

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL223 21.5"

16:9 Native Resolution 1920 x 1080

RTL223-RS4000-CC2F00-1.2

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB & RS232	9	35W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 511.7 x 298.1 x 44.5

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL243 23.8"

16:9 Native Resolution 1920 x 1080

RTL243-RS4000-CC2F00-1.1

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB & RS232	9	35W	VGA / DVI

Dimensions(mm)(w) x (H) x (D) 574.6 x 346.5 x 43.4

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL273 27"

16:9 Native Resolution 1920 x 1080

RTL273-RS4000-CD3F00-1.1

SAW

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
300	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB & RS232	12	40W	VGA / DVI HDMI / DP

Dimensions(mm)(w) x (H) x (D) 633.2 x 374.4 x 46.8

3 Year Warranty RoHS

Agency Approvals: CCC / FCC / CE / UKCA



RTL15L 15"

4:3 Native Resolution 1024 x 768

RTL15L-LC5000-UD3A00-1.0

Multi-Touch ZB PCAP

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
350	1000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	3.5	17W	VGA / DVI / DP

Dimensions(mm)(w) x (H) x (D) 358.0 x 284.9 x 40.3

3 Year Warranty RoHS

Agency Approvals: FCC / CE / UL / UKCA



RTL17L 17"

RTL17L-RC5000-UD2A00-1.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	85° / 85° / 80° / 80°	AG (Optional)	USB	4.4	19W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 392.2 × 327.5 × 42.8

Agency Approvals: FCC / CE / UKCA

5:4 Native Resolution 1280 × 1024

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL19L 19"

RTL19L-LC5000-UD2A00-1.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	1000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	4.8	19W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 420.1 × 348.1 × 42.1

Agency Approvals: FCC / CE / UL / UKCA

5:4 Native Resolution 1280 × 1024

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL106 10.1"

RTL106-RC4000-UD5A00-1.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
500	1300 : 1	85° / 85° / 85° / 85°	AG (Optional)	USB	2.1	12W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 255.8 × 178.5 × 36.9

Agency Approvals: CCC / FCC / CE / UKCA

16:10 Native Resolution 1280 × 800

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL156 15.6"

RTL156-LC5000-UD5200-1.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
500	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	3.9	18W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 394.7 × 242.0 × 43.4

Agency Approvals: FCC / CE / UKCA

16:9 Native Resolution 1920 × 1080

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL226 21.5"

RTL226-LC4000-UD2F00-2.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
250	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	5.56	20W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 516.0 × 311.0 × 37.9

Agency Approvals: CB / FCC / CE / UL

16:9 Native Resolution 1920 × 1080

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL246 23.8"

RTL246-LC4000-UD4200-2.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
400	3000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	6.1	25W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 569.2 × 341.1 × 37.0

Agency Approvals: CB / FCC / CE / UL / UKCA

16:9 Native Resolution 1920 × 1080

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL276 27"

RTL276-LC4000-UD3F00-2.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
300	1000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	7.35	28W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 644.2 × 388.4 × 39.6

Agency Approvals: CB / FCC / CE / UL / UKCA

16:9 Native Resolution 1920 × 1080

Multi-Touch ZB PCAP

3 Year Warranty RoHS



RTL326 32"

RTL326-LC5000-UD5F00-2.0

Luminance (nits)	Contrast Ratio	Viewing Angle (L/R/U/D)	Surface Treatment	Touch Interface	Weight (Kg)	Power Consumption (Typ)	I / O
500	4000 : 1	89° / 89° / 89° / 89°	AG (Optional)	USB	14.5	60W	VGA / HDMI / DP

Dimensions(mm)(w) × (H) × (D) 746.6 × 452.0 × 58.5

Agency Approvals: FCC / CE / UKCA

16:9 Native Resolution 1920 × 1080

Multi-Touch ZB PCAP

3 Year Warranty RoHS

