

CWT



For over 25 years the CWT has provided state of the art wide-bandwidth AC current measurement.


The CWT combines an easy to use thin, flexible, clip-around Rogowski coil with an ability to accurately replicate fast switching current waveforms be they, sinusoidal, quasi-sinusoidal, PWM or pulsed.

Ideal for a wide variety of applications, including power electronics development work, the CWT introduces practically zero insertion impedance to the DUT, offers isolation up to 10kV peak and is available in current ratings from 30A to 300kA.

The new CWTHF models

The CWT range has been improved and extended to now include the NEW CWTHF featuring

- A novel electrostatic shielded Rogowski coil providing excellent immunity to interference from fast local dV/dt transients or large 50/60Hz voltages
- Extended (-3dB) high frequency bandwidth of up to 30MHz for a 300mm coil
- Peak di/dt capability of over 100kA/ μ s.

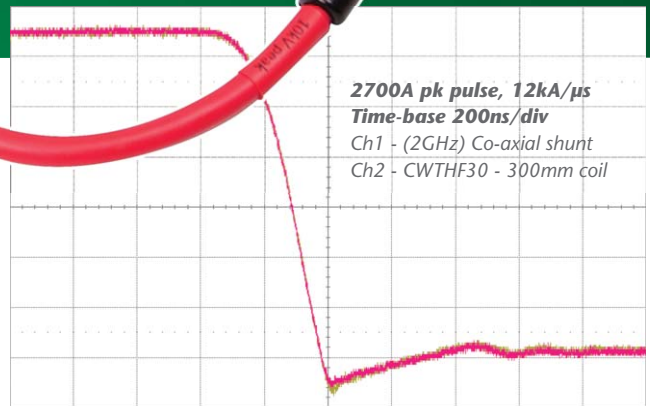

Applications

The CWT can be used in a diverse range of applications:

- Semiconductor switching waveforms (device loss)
- High frequency (hf) sinusoidal currents, e.g. induction heating
- Power converter development and diagnostics
- Measuring small AC currents in the presence of large DC currents (e.g. monitoring capacitor ripple)
- Measuring current in motor drives and in particular power quality in VSD, UPS or SMPS circuits
- Monitoring lightning strikes
- EMC measurement and measuring harmonic current components
- Measuring fault currents or for use in pulsed power measurements



PENI



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com

Model	Sensitivity (mV/A)	Peak current*1 (kA)	Noise max*2 (mVp-p)	Droop (%/ms)	LF (-3dB) bandwidth (Hz)	Peak di/dt (kA/μs)	HF (-3dB) bandwidth*3 (MHz)	
							300mm	700mm
CWTHF 015	200	0.03	15	85	150	2.0	20	8
CWTHF 03	100	0.06	11	78	105	4.0		8
CWTHF 06	50	0.12	8.0	70	80	8.0		10
CWTHF 1	20	0.3	6.0	50	50	20		10
CWTHF 3	10	0.6	12	11	12	40	30	15
CWT 3N	10	0.6	12.0	0.9	1.0	4.0	16	10
CWTHF 6	5.0	1.2	12	5.5	6.0	80	30	15
CWT 6	5.0	1.2	9.0	0.9	1.0	8.0	16	10
CWTHF 15	2.0	3.0	10	3.0	3.0	80	30	15
CWT 15	2.0	3.0	7.0	0.7	0.8	20	16	10
CWTHF 30	1.0	6.0	10	1.5	1.5	120	30	15
CWT 30	1.0	6.0	5.0	0.5	0.6	40	16	10
CWTHF 60	0.5	12	8.0	1.0	1.0	120	30	15
CWT 60	0.5	12	3.0	0.35	0.4	40	16	10
CWTHF 150	0.2	30	5.0	1.0	1.0	120	30	15
CWT 150	0.2	30	3.0	0.2	0.2	40	16	10
CWTHF 300	0.1	60	5.0	0.6	0.5	120	30	15
CWT 300	0.1	60	3.0	0.1	0.1	40	16	10
CWTHF 600	0.05	120	5.0	0.6	0.5	120	30	15
CWT 600	0.05	120	3.0	0.06	0.05	40	16	10
CWTHF 1500	0.02	300	5.0	0.6	0.5	120	30	15
CWT 1500	0.02	300	3.0	0.035	0.03	40	16	10

*1. Higher Peak current than 300kA available on request *2. Noise max. is the internally generated integrator noise which is at a maximum at LF(-3dB) bandwidth
*3. The High Frequency HF(-3dB) bandwidth is quoted for a 2.5m cable

Output	±6V peak corresponding to 'Peak Current' into ±2V peak, Sensitivity is half the nominal value into	≥ 100kΩ (e.g. DC1MΩ oscilloscope) = 50Ω
Accuracy	Conductor position in the coil (for a 80mm ² conductor) typically Linearity (with current magnitude)	±1% reading 0.05% reading
Calibration	Calibrated to ±0.2% reading with conductor central in the coil loop	
DC offset	±3mV at 25°C	
Temperature	Coil and cable Integrator	-20°C to +100°C 0°C to 40°C

di/dt ratings These are 'Absolute maximum di/dt ratings' and values must not be exceeded

Type	Abs. Max. peak di/dt	Abs. Max. rms di/dt
CWT HF	120kA/μs	1.5kA/μs
CWT	40kA/μs	1.5kA/μs

Coil length	300, 500, 700 and 1000mm – longer coils available on request
Insulation	10kV peak (8.5mm thick coil – removable silicone tube for mechanical protection 14mm thick)
Cable length	1, 2.5 or 4m – length of cable from coil to electronics, longer cables available on request
Power	Options: B - Standard: 4 x AA 1.5V alkaline batteries. Lifetime 25 hours. External adaptor disconnects batteries and powers unit. R - Rechargeable: 4 x AA 1.2V NiMH batteries. Lifetime 10 hours. External adaptor recharges batteries and powers unit. External power adaptor - US, EURO, UK versions available

More detailed technical notes for this product are available at www.pemuk.com

Model	Power option	Cable length (m)	Coil length (mm)
See table above	B-Battery R-Rechargeable	1, 2.5 or 4 (Custom lengths available)	300, 500, 700 or 1000 (Custom lengths available)
CWTHF 06	R	2.5	700

i.e. a CWTHF, peak current 120A, Rechargeable battery, 2.5m cable, 700mm circumference coil, 10kV peak coil, 8.5mm thick
All units are supplied with, factory calibration certificate, hard carry case, 0.5m BNC:BNC output cable

If you have any queries regarding the CWT or require specifications outside our standard ranges please contact us.

www.pemuk.com

