

Solar Light's advanced Model 601 Multiport[®] SPF Testing Solar Simulator is the industry standard for high throughput SPF testing and dermatological studies. It produces UVA or UVA+B (290-400nm) from its 6 individual 8mm diameter square-port outputs, each of which can be controlled separately. Up to 6 tests can be performed simultaneously in a short period of time, dramatically increasing lab productivity. The output intensity is rated up to 4 MEDs per minute, and can be controlled by the adjustment knobs on each port, as well as via the included XPS-300 power supply. The output is approximately 20 times the intensity of the sun, and simulates the ultraviolet spectrum of the sun with over 90% homogeneity. A built-in locking Articulation Arm assures precise light guide placement on subjects. Solar Light Solar Simulators are used in 95% of SPF testing laboratories globally, and meet the latest ISO, FDA, JCIA, and COLIPA spectral irradiance standards. Everything required to begin testing is included with the 601 Multiport[®]: The 6-Port Simulator, DCS-2 Automated Dose Controller, NIST-Traceable PMA-Series SUV and UVA Sensors, Safety Glasses, and a starter pack of 100 disposable Hypoallergenic Placement Pads. An optional Point of Service Cart for the 601 Multiport[®] is available with 2 dimensional electronic actuators to allow accurate placement of the light guides, and includes a fixture to carry the power supply, a stand for the radiometer, and a desktop for note taking as shown.



Applications

- SPF Testing
- Mutagenesis
- Dermatology
- Allergy Testing
- Photobiology

Features and Benefits

- Very High (98%) Uniformity from Homogenized Output
- Excellent Long-Term Stability
- 6 Port Output Dramatically Reduces Test Time
- Complies with FDA, JCIA, Australian and ISO Guidelines
- Automatic Dose Control
- Easy to Use Intensity and Uniformity Measurement System
- Full System Supplied Ready to Use

SOLAR[®] L I G H T

SPF Testing Multiport[®] 6-Channel Light Source Model 601 v.2.5

6-Port Simulator to Irradiate Subjects for
Skin Typing and In Vivo SPF Testing Studies

SPECIFICATIONS	
UVA Spectral Response	Follows the distribution of sunlight from 290 to 400nm, Figure 1
UVA+B Spectral Response	Figure 2
Simulator Spectrum	290nm to 400nm
Simulator Output	300W Xenon Short Arc
Exposure Area	6 LLGs - Each 8mm
Power Requirements	110 or 220VAC, 50/60Hz
Filters	Validated to the International Sun Protection Factor Test Method Standard 2003
Internal Igniter	Igniter is used to ignite the Xenon Arc Lamp
Light Source	Xenon Lamp
Lamp Housing	Six Liquid Light Guides each 19.7" (50 cm) Long
Output Selection Switch	Choose between UVA only or UVA + UVB spectra
Adjustable Stand	Allows 20" (50 cm) - vertical adjustment
Articulating Arm	Holds Liquid Light Guides firmly in position during tests
Complete High Performance Optics and Homogenizer:	For collimation and uniformity
Operating Conditions:	0-50°C (32 to 120°F)
Height	21.8" (55 cm) Long <i>(Without Liquid Light Guides)</i> 39" (99 cm) <i>(With Liquid Light Guides)</i>
Weight	11lbs. (5.0 kg)

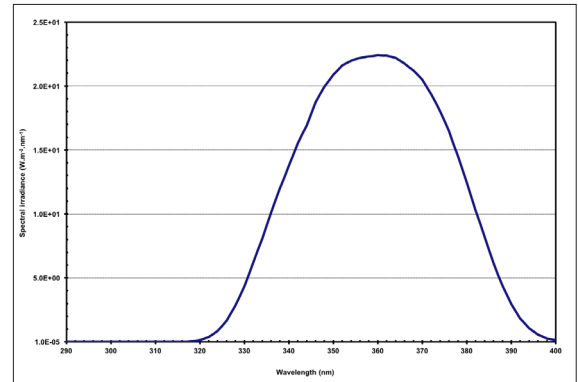


Fig. 1. 601 v.2.5 UVA Linear Spectral Response

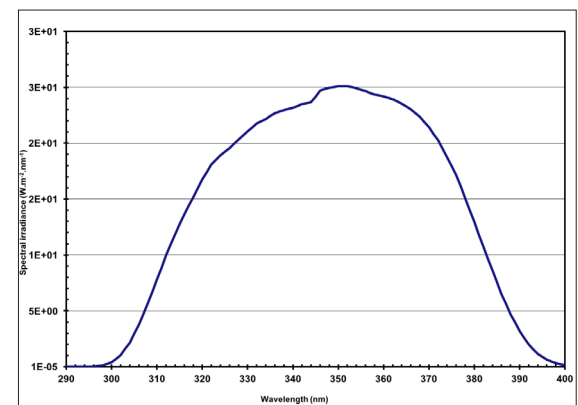


Fig. 2. 601 v.2.5 UVA+B Linear Spectral Response

SL/SPFTestingMultiport/601v2.5_08/2017
Specifications subject to change without notice.
*U.S. Pat. 7,657,147



Included DCS-2 Automatic Dose Controller



Included NIST-Traceable UV & UVA Sensors



Included XPS-300 Xenon Lamp Power Supply

100 East Glenside Avenue • Glenside, PA 19038 • USA • P 1 215 517 8700 • F 1 215 517 8747

(ES) Equipements Scientifiques SA - Département Bio-tests & Industries - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 90 - Fax. 01 47 01 16 22 - e-mail: bio@es-france.com - Site Web: www.es-france.com



Since 1967, Solar Light Company, Inc. has been recognized worldwide as America's premier manufacturer of Precision Solar Simulators and Light Sources, Light Measurement Instrumentation, UV Transmittance Analyzers, Meteorological Instrumentation, and Digital and Analog Sensors. Our advanced line of UV, visible, and IR radiometers and light meters measure laboratory, industrial, environmental, and health related light levels with NIST traceable accuracy. Column ozone, aerosol, and water vapor thickness measurements, in addition to long-term global ultraviolet radiation studies all over the world are performed using our atmospheric line of instrumentation. Solar Light also provides NIST traceable spectroradiometric analyses, calibrations for light meters and light sources, accelerated ultraviolet radiation degradation testing of materials, and OEM instrumentation and monitors. Please visit our website for more details, specifications, and pictures!



State Of The Art Solar Simulators available in 150-1000+ watt UV or AM variations for a variety of applications including PV Cell Testing, Materials Testing, Pre-Irradiation for In Vitro Broad Spectrum Sunscreen Testing, SPF Testing, and much more.



Multi-Functional Professional Grade Radiometers available with and without data logging, and compatible with over 130 Solar Light PMA-Series Sensors to measure UV, Visible and IR wavelengths. Specialty Meters also available to measure UV Radiation, SUV/UVA, Scotopic/ Photopic Spectra, and much more.



Advanced NIST-Traceable Sensors for accurate measurement of UVA, UVB, UVA+B, UVC, Visible, IR, Photostability, Temperature, and Custom Wavelength – well over 130 models in both digital and analog configurations, all compatible with our Radiometers.



Ultraviolet Transmittance Analyzers available as complete integrated turnkey systems to meet the latest ISO24443 requirements.



Handheld Ozonometers and Sunphotometers for fast and dependable Column Ozone, Aerosol, and Water Vapor Thickness measurements, in addition to long-term global ultraviolet radiation studies.

SOLAR[®]
L I G H T

**SPF Testing Multiport[®] 6-Channel Light Source
Model 601 v.2.5**

6-Port Simulator to Irradiate Subjects for
Skin Typing and In Vivo SPF Testing Studies

SPF Testing Multiport[®] 6-Channel Light Source Outline Drawing

100 East Glenside Avenue • Glenside, PA 19038 • USA • P 1.215.517.8700 • F 1.215.517.8747

*(ES) Equipements Scientifiques SA - Département Bio-tests & Industries - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 90 - Fax. 01 47 01 16 22 - e-mail: bio@es-france.com - Site Web: www.es-france.com*

