Open Frame LCD

Ultar View Angle LCD

20"

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	R20T600-OFA1
Viewable Size Image	20.1"
Active Display Area(mm)	408.0(H)x306.0(V)
Pixel Pitch(mm)	0.51(H)x0.51(V)
Number of Pixels	800x600
Contrast Ratio	500:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m^2)	450(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Synchronization Range Horizontal/Vertical	35.1~46.9KHz/56~75Hz
Recommended Resolution	800x600@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	43W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive,SAW

Remarks:R20T600 series= VGA input only
R20T630 series= VGA+Video Input
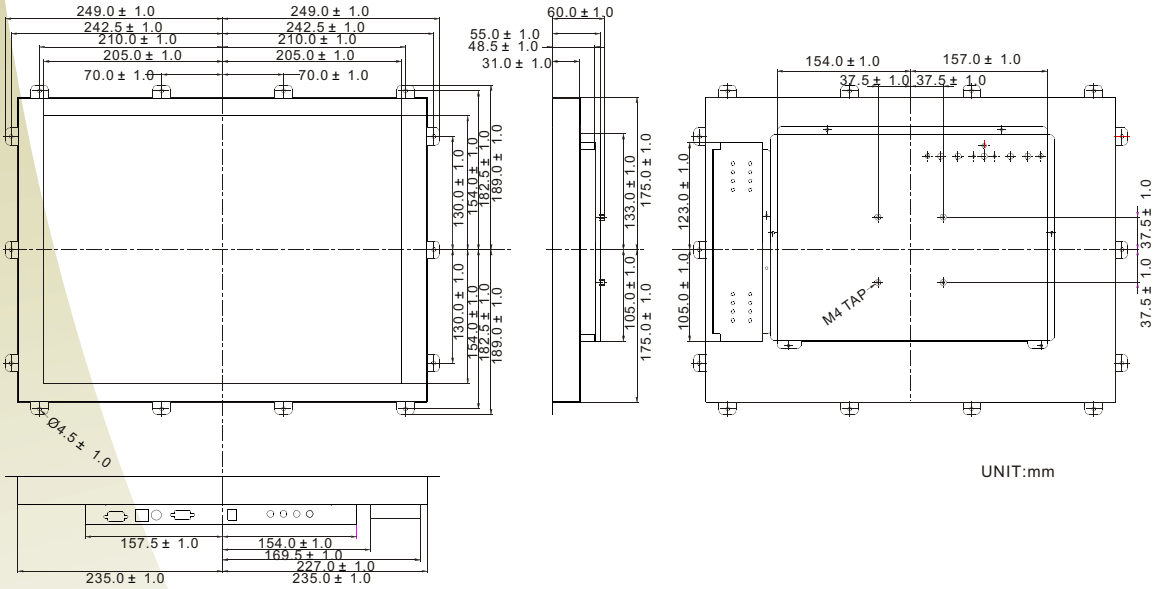
Mechanical Drawing