# Open Frame+Front Bezel

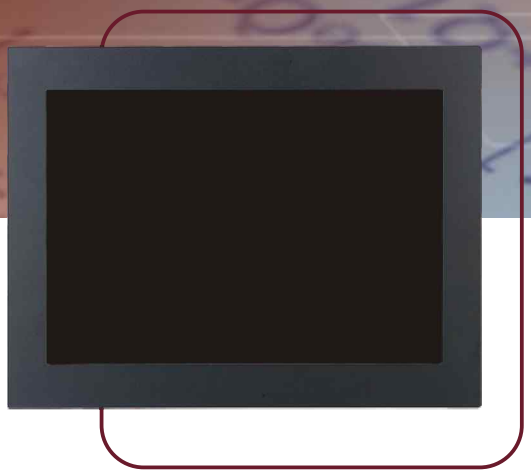

## 17" (821720305130)

RoHS COMPLIANT 2002/95/EC

## LCD Specifications

| | |
|---|---|
| Model Name | S17L500-OBM1 |
| Viewable Size Image | 17" |
| Active Display Area(mm) | 337.92(H)x270.34(V) |
| Pixel Pitch(mm) | 0.264(H)x0.264(V) |
| Number of Pixels | 1280x1024 |
| Contrast Ratio | 800:1(typ.) |
| Display Color | 16.7M(6bits+FRC) |
| Brightness(cd/m$^2$) | 300(typ.) |
| Viewing Angle(CR>=10) | -80~80(H);-80~80(V) |
| Synchronization Range Horizontal/Vertical | 31.5~80.0KHz/60~75Hz |
| Recommended Resolution | 1280x1024@60Hz, 75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | AC100~240V, Universal, ±10% |
| Power Consumption | 32W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive,Capacitive,SAW |

Remarks:S17L500 series= VGAinput only
S17L540 series= VGA+Video Input

## Mechanical Drawing

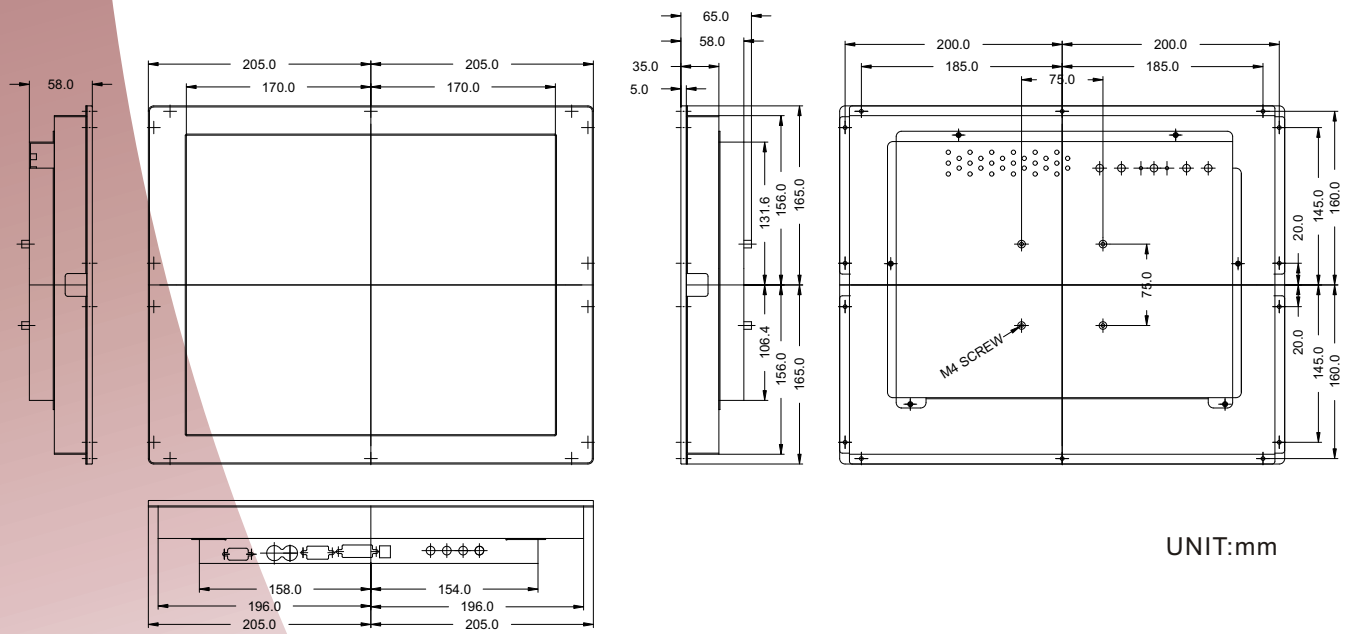


UNIT:mm