# 10 Console Drawer


# 10 Console Drawer

IU Console LCD Drawer or Switch can save space, power and money. It only takes IU (1.75in), same height as the rack space. It is an ideal solution for ASP, ISP, telecommunication companies, and testing rooms.

#### \*All specifications are

### What is KVM?

KVM is the acronym for keyboard, Video, Mouse. More specifically, multiple computers are connected to the KVM and controlled from a single set of keyboard, monitor and mouse. Although there are multiple computers connected the KVM, however only one can be controlled at a time. Control of each computer is done separately via the use of switches on the KVM. It does this by fooling each computer into thinking that it is currently actively connected to a separate keyboard, mouse and monitor. Since the KVM incorporates only a single set of keyboard, monitor and mouse, it saves space, cuts cost as well as increase the efficiency of work done. Along with the ease of control, it saves time and adds valuable flexibility to the whole system.




### **19"** LDS410D-8P



| Specifications   | 2002/95/EC                                   |
|--|--|
| Display Area(mm)   | 376.3(H)x301.1(V)(19.0-inch diagonal)        |
| Pixel Pitch  | 0.294(H)x0.294(V)                            |
| Number of Pixels   | 1280(H)x1024(V)                              |
| Contrast Ratio   | 1300:1                                       |
| Display Color  | 16.7M(8bit/ colors)                          |
| Brightness(CD/m <sup>2</sup> )   | 300  |
| Backlight Unit   | 4 replaceable CCFLs edge-light (top/bottom)  |
| Viewing Angle  | -89~89(H);-89~89(V)(typ.)                    |
| I/O  | Power:12V DC adapter (built-in)              |
|  | Keyboard: PS/2                               |
|  | Mouse:PS/2                                   |
|  | VGA:15-pin D-Sub                             |
| Keyboard and KeyPad  | 88-Key keyboard and integrated Touch Pad     |
|  | 17-Key numerical keypad                      |
| Power Consumption  | 44 Watts                                     |
| Power Supply   | AC 100-240V Universal                        |
| On-Screen Display  | Contrast, Brightness, H/V Position, H/V Size |
|  | H-scaling,Auto-adjust,Color Temp.(9300,6500, |
|  | User),Red-Gain,Blue-Gain,Green-Gain,Gamma,   |
|  | Recall,Phase,OSD & Exit                      |
| Hot Key Control  | OSD Hot Key                                  |
| Environmental Consideration  | Operating temperature:0°C~50°C (32F~122F)    |
| and the second | Storage temperature:-20°C~60°C (-4F~140F)    |
| Humidity   | 10~85% in operating;10-90% instorage         |
| Size   | 544mm(D) x483mm(W) x44.5mm(H)                |

# 10 Console Drawer

## **1U Console Drawer**

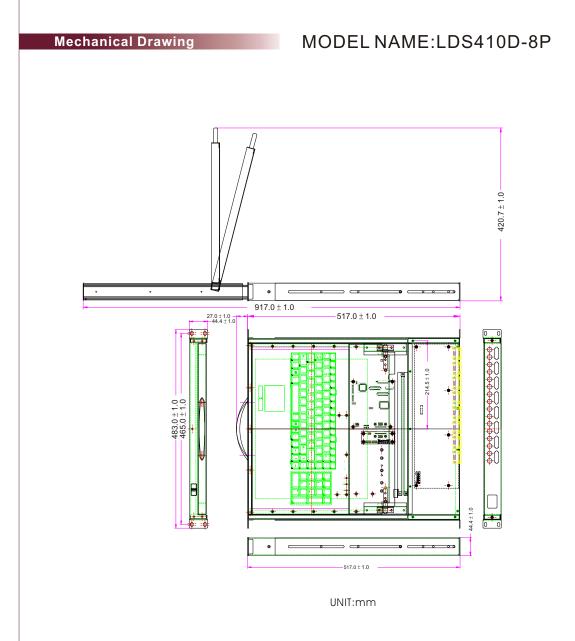

### Ordering Information

|     |         | 19"         |
|-----|---------|-------------|
| KVM | 1 Port  | LDS410D-1P  |
|     | 8 Port  | LDS410D-8P  |
|     | 16 Port | LDS410D-16P |