

# Keysight Technologies

## 34401A Digital Multimeter

Data Sheet



## Measurement capability

- 6½ digit resolution
- 10 measurement functions: DC/AC voltage, DC/AC current, 2- and 4-wire resistance, diode, continuity, frequency, period
- Basic accuracy: 0.0035% DC, 0.06% AC
- 1000 V max voltage input, 3 A max current input

## System Capability

- 1000 readings/second
- 512 reading memory

[www.keysight.com/find/dmm](http://www.keysight.com/find/dmm)

## Superior performance

The Keysight Technologies, Inc. 34401A multimeter gives you the performance you need for fast, accurate bench and system testing. The 34401A provides a combination of resolution, accuracy and speed that rivals DMMs costing many times more. 6½ digits of resolution, 0.0015% basic 24-hr dcV accuracy and 1,000 readings/s direct to GPIB assure you of results that are accurate, fast, and repeatable.

## Use it on your benchtop

The 34401A was designed with your bench needs in mind. Functions commonly associated with bench operation, like continuity and diode test, are built in. A Null feature allows you to remove lead resistance and other fixed offsets in your measurements. Other capabilities like min/max/avg readouts and direct dB and dBm measurements make checkout with the 34401A faster and easier.

The 34401A gives you the ability to store up to 512 readings in internal memory. For troubleshooting, a reading hold feature lets you concentrate on placing your test leads without having to constantly glance at the display.

## Use it for systems testing

For systems use, the 34401A gives you faster bus throughput than any other DMM in its class. The 34401A can send up to 1,000 readings/s directly across GPIB in user-friendly ASCII format.

You also get both GPIB and RS-232 interfaces as standard features. Voltmeter Complete and External Trigger signals are provided so you can synchronize to other instruments in your test system. In addition, a TTL output indicates Pass/Fail results when limit testing is used.

To ensure both forward and backward compatibility, the 34401A includes three command languages (SCPI, Keysight 3478A and Fluke8840A/42A), so you don't have to rewrite your existing test software. An optional rack mount kit is available.

## Easy to use

Commonly accessed attributes, such as functions, ranges, and resolution are selected with a single button press.

Advanced features are available using menu functions that let you optimize the 34401A for your applications.

The included Keysight IntuiLink software allows you to put your captured data to work easily, using PC applications such as Microsoft Excel or Word to analyze, interpret, display, print, and document the data you get from the 34401A. You can specify the meter setup and take a single reading or log data to the Excel spreadsheet in specified time intervals. Programmers can use ActiveX components to control the DMM using SCPI commands. To find out more about IntuiLink, visit [www.keysight.com/find/intuilink](http://www.keysight.com/find/intuilink)

## 3-year warranty

With your 34401A, you get full documentation, a high-quality test lead set, calibration certificate with test data, and a 3-year warranty, all for one low price.



## Accuracy Specifications $\pm$ (% of reading + % of range)<sup>1</sup>

Function	Range <sup>3</sup>	Frequency, etc.	24 hour <sup>2</sup> 23 $\pm$ 1 $^{\circ}$ C	90 day 23 $\pm$ 5 $^{\circ}$ C	1 year 23 $\pm$ 5 $^{\circ}$ C	Temperature coefficient 0 – 18 $^{\circ}$ C 28 – 55 $^{\circ}$ C
DC voltage	100.0000 mV		0.0030 + 0.0030	0.0040 + 0.0035	0.0050 + 0.0035	0.0005 + 0.0005
	1.000000 V		0.0020 + 0.0006	0.0030 + 0.0007	0.0040 + 0.0007	0.0005 + 0.0001
	10.00000 V		0.0015 + 0.0004	0.0020 + 0.0005	0.0035 + 0.0005	0.0005 + 0.0001
	100.0000 V		0.0020 + 0.0006	0.0035 + 0.0006	0.0045 + 0.0006	0.0005 + 0.0001
	1000.000 V		0.0020 + 0.0006	0.0035 + 0.0010	0.0045 + 0.0010	0.0005 + 0.0001
True rms AC voltage <sup>4</sup>	100.0000 mV	3 – 5 Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5 – 10 Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
		10 Hz – 20 kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
		20 – 50 kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50 – 100 kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100 – 300 kHz <sup>6</sup>	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
	1.000000 V to 750.000 V	3 – 5 Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5 – 10 Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10 Hz – 20 kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
		20 – 50 kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.04	0.011 + 0.005
Resistance <sup>7</sup>	100.0000 $\Omega$	1 mA current source	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005
	1.000000 k $\Omega$	1 mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	10.00000 k $\Omega$	100 $\mu$ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	100.0000 k $\Omega$	10 $\mu$ A	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	1.000000 M $\Omega$	5.0 $\mu$ A	0.002 + 0.001	0.008 + 0.001	0.010 + 0.001	0.0010 + 0.0002
	10.00000 M $\Omega$	500 nA	0.015 + 0.001	0.020 + 0.001	0.040 + 0.001	0.0030 + 0.0004
	100.0000 M $\Omega$	500 nA II 10 M $\Omega$	0.300 + 0.010	0.800 + 0.001	0.800 + 0.001	0.1500 + 0.0002
DC current	10.00000 mA	< 0.1 V burden voltage	0.005 + 0.010	0.030 + 0.020	0.050 + 0.020	0.0020 + 0.0020
	100.0000 mA	< 0.6 V	0.010 + 0.010	0.030 + 0.005	0.050 + 0.005	0.0020 + 0.0005
	1.000000 A	< 1.0 V	0.050 + 0.010	0.080 + 0.010	0.100 + 0.010	0.0050 + 0.0010
	3.00000 A	< 2.0 V	0.100 + 0.010	0.120 + 0.020	0.120 + 0.020	0.005 + 0.0020
True rms AC current <sup>4</sup>	1.000000 A	3 – 5 Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
		5 – 10 Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10 Hz – 5 kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006
	3.00000 A	3 – 5 Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.100 + 0.006
		5 – 10 Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.035 + 0.006
		10 Hz – 5 kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
Frequency or period <sup>8</sup>	100 mV to 750 V	3 – 5 Hz	0.10	0.10	0.10	0.005
		5 – 10 Hz	0.05	0.05	0.05	0.005
		10 – 40 Hz	0.03	0.03	0.03	0.001
		40 Hz – 300 kHz	0.006	0.01	0.01	0.001
Continuity	1000.0 $\Omega$	1 mA test current	0.002 + 0.030	0.008 + 0.030	0.010 + 0.030	0.001 + 0.002
Diode test <sup>9</sup>	1.0000 V	1 mA test current	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.001 + 0.002

1. Specifications are for 1 hr warm-up and 6½ digits, slow ac filter.

2. Relative to calibration standards.

3. 20% over range on all ranges except 1000 Vdc and 750 Vac ranges.

4. For sinewave input > 5% of range. For inputs from 1% to 5% of range and < 50 kHz, add 0.1% of range additional error.





5. 750 V range limited to 100 kHz or 8 x 10<sup>7</sup> Volt-Hz.

6. Typically 30% of reading error at 1 MHz.

7. Specifications are for 4-wire ohms function or 2-wire ohms using Math Null. Without Math Null, add 0.2  $\Omega$  additional error in 2-wire ohms function.

8. Input > 100 mV. For 10 to 100 mV inputs multiply % of reading error x 10.

9. Accuracy specifications are for the voltage measured at the input terminals only. 1 mA test current is typical. Variation in the current source will create some variation in the voltage drop across a diode junction.

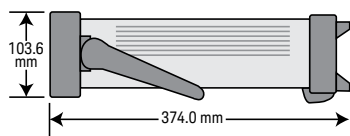

## Measurement Characteristics

### DC voltage

Measurement method	Continuously integrating multi-slope III A-D converter
A-D linearity	0.0002% of reading + 0.0001% of range
Input resistance	
10 MΩ or 0.1V, 1 V, 10 V ranges	Selectable > 10,000 MΩ
100 V, 1000 V ranges	10 MΩ ±1%
Input bias current	< 30 pA at 25°C
Input protection	1000 V all ranges
dcV:dcV ratio accuracy	$V_{\text{input}}$ accuracy + $V_{\text{relevance}}$ accuracy

### True RMS AC voltage

Measurement method	AC-coupled true rms-measures the ac component of the input with up to 400 Vdc of bias on any range
Crest factor	Maximum of 5:1 at full scale
Additional crest factor errors (non-sinewave)	Crest factor 1-2: 0.05% of reading
	Crest factor 2-3: 0.15% of reading
	Crest factor 3-4: 0.30% of reading
	Crest factor 4-5: 0.40% of reading
Input impedance	1 MΩ ± 2% in parallel with 100 pF
Input protection	750 Vrms all ranges

### Resistance

Measurement method	Selectable 4-wire or 2-wire Ohms
	Current source referenced to LO input
Maximum lead resistance (4-wire)	10% of range per lead for 100 Ω, 1 kΩ ranges 1 kΩ per lead on all other ranges
Input protection	1000 V all ranges

### DC current

Shunt resistance	5 Ω for 10 mA, 100 mA
	0.1 Ω for 1 A, 3 A
Input protection	Externally accessible 3 A 250 V fuse
	Internal 7 A 250 V fuse

### True RMS AC current

Measurement method	Directly coupled to the fuse and shunt. ac coupled true rms measurement (measures the ac component only).
Shunt resistance	0.1 Ω for 1 A and 3 A ranges
Input protection	Externally accessible 3 A 250 V fuse
	Internal 7 A 250 V fuse

### Frequency and period

Measurement method	Reciprocal counting technique
Voltage ranges	Same as ac voltage function
Gate time	1 s, 100 ms, or 10 ms

### Continuity/diode

Response time	300 samples/s with audible tone
Continuity threshold	Selectable from 1 Ω to 1000 Ω

### Measurement noise rejection 60 (50) Hz <sup>1</sup>

dc CMRR	140 dB
ac CMRR	70 dB

### Integration time and normal mode rejection <sup>2</sup>

100 plc/1.67 s (2 s)	60 dB <sup>3</sup>
0 plc/167 ms (200 ms)	60 dB <sup>3</sup>
1 plc/16.7 ms (20 ms)	60 dB
< 1 plc/3 ms or 800 μs)	0 dB

### Operating characteristics <sup>4</sup>

Function	Digits	Reading/s
dcV, dcl, and resistance	6½	0.6 (0.5)
	6½	6 (5)
	5½	60 (50)
	5½	300
	4½	1000
acV, acl	6½	0.15 slow (3 Hz)
	6½	1 medium (20 Hz)
	6½	10 fast (200 Hz) <sup>5</sup>
	6½	50
Frequency or period	6½	1
	5½	9.8
	4½	80

- For 1 kΩ unbalanced in LO lead, ± 500 V peak maximum.
- For power line frequency ± 0.1%.
- For power line frequency ± 1% use 40 dB or ± 3% use 30 dB.
- Reading speeds for 60 Hz and (50 Hz) operation.
- Maximum useful limit with default settling delays defeated.
- Speeds are for 4½ digits, delay 0, auto-zero and display OFF.

## Measurement Characteristics *continued*

System speeds	
Configuration rates	26/s to 50/s
Autorange rate (dc Volts)	> 30/s
ASCII readings to RS-232	55/s
ASCII readings to GPIB	1000/s
Maximum internal trig rate	1000/s
Max. ext trig. rate to mem	1000/s
Triggering and memory	
Reading HOLD sensitivity	10%, 1%, 0.1%, or 0.01% of range
Samples/trigger	1 to 50,000
Trigger delay	0 to 3600 s: 10 $\mu$ s step size
External trigger delay	< 1 ms
External trigger jitter	< 500 $\mu$ s
Memory	512 readings
Math functions	
NULL, min/max/average, dBm, dB, limit test (with TTL output)	
Standard programming languages	
SCPI (IEEE-488.2), Keysight 3478A, Fluke 8840A/42A	
Accessories included	
Test lead kit with probe, alligator and grabber attachments	
Operating manual, service manual, test report and power cord	
General specifications	
Power supply	100 V/120 V/220 V/240 V $\pm$ 10%
Power line frequency	45 to 66 Hz and 360 to 440 Hz, automatically sensed at power-on
Power consumption	25 VA peak (10 W average)
Operating environment	Full accuracy for 0 to 55 °C, full accuracy to 80% R.H. at 40 °C
Storage temperature	–40 to 70 °C
Weight	3.6 kg (8.0 lbs)
Safety	Designed to CSA, UL-1244, IEC-348
RFI and ESD	MIL-461C, FTZ 1046, FCC
Vibration and shock	MIL-T-28800E, Type III, Class 5 (sine only)
Warranty	1 year

## Ordering Information

Keysight 34401A multimeter accessories included: Test lead kit with probe, alligator, and grabber attachments, calibration certificate, test report, and power cord. Also includes CD with: IntuiLink software, IVI and VXI PnP drivers, Quick start tutorial, user's guide, command quick reference, service guide, and data sheet.

### Options

34401A-A6J	ANSI Z540 compliant calibration
------------	---------------------------------

### Accessories

Probes/Leads/Clip Accessories	
11059A	Kelvin probe set
11060A	Surface mount device (SMD) test probes
11062A	Kelvin clip set
34133A	Precision electronic test leads
34134A	DC coupled current probe
34136A	High voltage probe
34138A	Test lead set
34171B	Input terminal connector (sold in pairs)
34172B	Input calibration short (sold in pairs)
34330A	30 A current shunt
E2308A	5 k thermistor probe
Y1133A	Low-thermal external digital multimeter scanning kit

### Rackmount kits

34190A Rackmount kit	Designed for use with only one instrument, mounted on either the left or the right side of the rack.
34191A 2U Dual flange kit	Secures the instrument to the front of the rack. This kit can be used with the 34194A dual lock link kit to mount two half-width, 2U height instruments side-by-side.
34194A Dual lock link kit	Recommended for side-by-side combinations and includes links for instruments of different depths. This kit can be used with the 34191A 2U dual flange kit to mount two half-width, 2U height instruments side-by-side.

### Other accessories

34131A	Hard transit case
34161A	Accessory pouch
34398A	RS-232 cable, 9 pin (f) to 9 pin (f)
E5810B	LAN/GPIB gateway

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.axiestandard.org](http://www.axiestandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System



**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/34401A](http://www.keysight.com/find/34401A)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

#### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-09-23-14)



This information is subject to change without notice.  
© Keysight Technologies, 2013 - 2014  
Published in USA, November 13, 2014  
5968-0162EN  
[www.keysight.com](http://www.keysight.com)